

STRUCTURE	Silicon monolithic integrated circuits
PRODUCT SERIES	1chip motor driver for printer (H bridge driver 2ch, switching regulator, series regulator, reset output)
TYPE	BD64550EFV
FUNCTION	• Built-in thermal shut down circuit • Built-in UVLO circuit

○Absolute maximum ratings (Ta=25°C)

Parameter	Symbol	Limit	Unit
Supply voltage	V_M	40	V
Power dissipation	P_d	1600 ^{※1}	mW
Logic input voltage	V_L	-0.4~5.5	V
RIN applied voltage	V_{RIN}	5.5	V
RNF voltage	V_{RNF}	0.5	V
Motor driver maximum output current (peak500nsec)	$I_{OUT(peak)}$	8.0	A
Motor driver maximum output current (DC)	$I_{OUT(DC)}$	2.5 ^{※2}	A
Switching Reg maximum output current (DC)	I_{OUT}	0.5	A
Series Reg maximum output current (DC)	I_{OUT}	0.25	A
Operating temperature range	T_{OPR}	-25~+85	°C
Storage temperature range	T_{STG}	-55~+150	°C
Junction temperature	T_{jmax}	150	°C

※1 70mm × 70mm × 1.6mm glass epoxy board. Derating in done at 12.8mW/°C for operating above Ta=25°C.

※2 Do not exceed Pd, ASO and Tjmax=150°C.

○Recommended operating conditions (Ta= -25~+85°C)

Parameter	Symbol	Min	Typ	Max	Unit
Supply voltage	V_M	7	24	36	V
SCLK input frequency	F_{SCLK}	-	-	20	MHz
Switching Reg output voltage	V_{swreg}	3	-	5	V

This product isn't designed for protection against radioactive rays.

Status of this document

The Japanese version of this document is the formal specification.


A customer may use this translation version only for a reference to help reading the formal version.

If there are any differences in translation version of this document, formal version takes priority.

○Electrical characteristics (Unless otherwise specified, Ta=25°C, V_M=24V)


Parameter	Symbol	Limit			Unit	Conditions
		Min.	Typ.	Max.		
Overall						
VM current 1	I _{VM1}	-	-	8	mA	V _M =7V
VM current 2	I _{VM2}	-	-	12	mA	V _M =24V
H bridge 1						
Output on resistance (source side)	R _{ONH1}	-	0.6	0.78	Ω	I _{OUT} =1A
Output on resistance (sinking side)	R _{ONL1}	-	0.4	0.52	Ω	I _{OUT} =1A
Output leak current	I _{LEAK1}	0	-	10	μ A	V _M =36V
Built-in diode forward direction voltage (source side)	V _{FH1}	0.6	0.9	1.2	V	I _{OUT} =1A
Built-in diode forward direction voltage (sinking side)	V _{FL1}	0.6	0.9	1.2	V	I _{OUT} =1A
H bridge 2						
Output on resistance (source side)	R _{ONH2}	-	0.7	0.91	Ω	I _{OUT} =1A
Output on resistance (sinking side)	R _{ONL2}	-	0.5	0.65	Ω	I _{OUT} =1A
Output leak current	I _{LEAK2}	0	-	10	μ A	V _M =36V
Built-in diode forward direction voltage (source side)	V _{FH2}	0.6	0.9	1.2	V	I _{OUT} =1A
Built-in diode forward direction voltage (sinking side)	V _{FL2}	0.6	0.9	1.2	V	I _{OUT} =1A
Current control						
VREF voltage range	V _{REF}	0.8	-	3.5	V	
VREF pin outflow current	I _{REF}	-	0	1	μ A	
RNF pin outflow current	I _{RNF}	5	15	30	μ A	
RNFS pin outflow current	I _{RNFS}	-	0	1	μ A	
VREF-RNFS offset voltage	V _{OFFSET}	-15	0	15	mV	VREF=2V
Control logic						
High input voltage	V _{INH}	2.0	-	5.5	V	
Low input voltage	V _{INL}	0	-	0.8	V	
Input current	I _{IN}	21	33	45	μ A	Input voltage=3.3V
Switching power source						
DSEN threshold voltage	V _{SWBIAS}	0.873	0.9	0.927	V	
Output on resistance	R _{SWON}	-	0.8	1.04	Ω	I _{OUT} =250mA
Leak current	I _{SWLEAK}	0	-	10	μ A	V _M =36V
DUTY_MAX value	D _{MAX}	-	92	-	%	
Clock frequency	F _{SW}	130	200	270	KHz	
DSEN pin outflow current	I _{DSEN}	-	0	1	μ A	
Series power source						
Output voltage	V _{SOUT}	1.425	1.5	1.575	V	I _{OUT} =70mA
Leak current	I _{SLEAK}	0	-	10	μ A	
RESET pin						
Output voltage	V _{RSTL}	0	-	0.2	V	I _{DRAIN} =1mA
Leak current	I _{RSTLEAK}	0	-	10	μ A	
High VM threshold voltage	V _{MPORH}	6.3	6.5	6.7	V	V _M at power on
Low VM threshold voltage L	V _{MPORL}	5.9	6.1	6.3	V	V _M at power off
High motor UVLO voltage	V _{MMTH}	13.5	15	16.5	V	Off motor only
Low motor UVLO voltage	V _{MMTL}	12.5	14	15.5	V	
Reset delay time	T _{POR}	50	80	110	msec	

Package outline

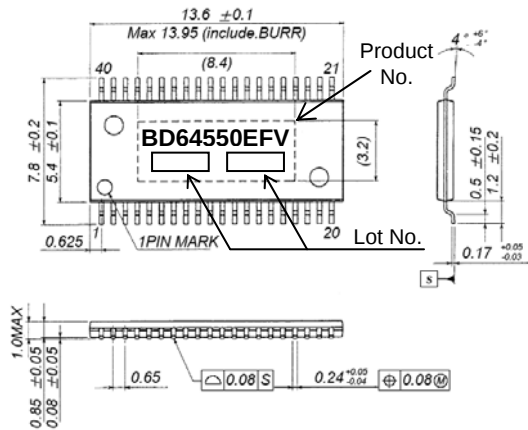

HTSSOP-B40 (Unit: mm)

Block diagram

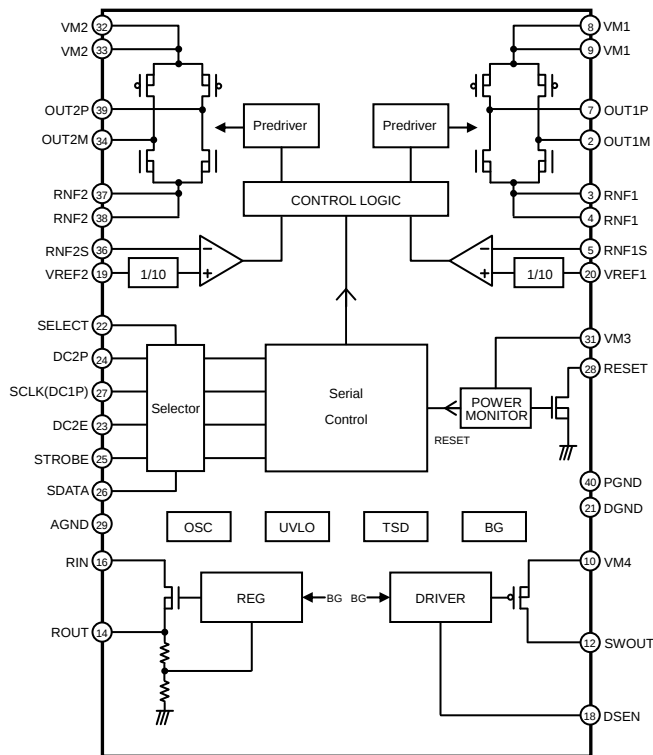

Pin No. / Pin name

Pin No.	Pin name	Pin No.	Pin name
1	NC	21	DGND
2	OUT1M	22	SELECT
3	RNF1	23	DC2E
4	RNF1	24	DC2P
5	RNF1S	25	STROBE
6	NC	26	SDATA
7	OUT1P	27	SCLK
8	VM1	28	RESET
9	VM1	29	AGND
10	VM4	30	NC
11	NC	31	VM3
12	SWOUT	32	VM2
13	NC	33	VM2
14	ROUT	34	OUT2M
15	NC	35	NC
16	RIN	36	RNF2S
17	NC	37	RNF2
18	DSEN	38	RNF2
19	VREF2	39	OUT2P
20	VREF1	40	PGND

NC: Non Connection

Operation Notes

(1) Absolute maximum ratings

Use of the IC in excess of absolute maximum ratings such as the applied voltage or operating temperature range (TOPR) may result in IC damage. Assumptions should not be made regarding the state of the IC (short mode or open mode) when such damage is suffered. The implementation of a physical safety measure such as a fuse should be considered when use of the IC in a special mode where the absolute maximum ratings may be exceeded is anticipated.

(2) Power supply lines

Regenerated current may flow as a result of the motor's back electromotive force. Insert capacitors between the power supply and ground pins to serve as a route for regenerated current. Determine the capacitance in full consideration of all the characteristics of the electrolytic capacitor, because the electrolytic capacitor may lose some capacitance at low temperatures. If the connected power supply does not have sufficient current absorption capacity, regenerative current will cause the voltage on the power supply line to rise, which combined with the product and its peripheral circuitry may exceed the absolute maximum ratings. It is recommended to implement a physical safety measure such as the insertion of a voltage clamp diode between the power supply and GND pins.

(3) Ground potential

Ensure a minimum GND pin potential in all operating conditions.

(4) Setting of heat

Use a thermal design that allows for a sufficient margin in light of the power dissipation (Pd) in actual operating conditions.

This IC exposes its frame of the backside of package. Note that this part is assumed to use after providing heat dissipation treatment to improve heat dissipation efficiency. Try to occupy as wide as possible with heat dissipation pattern not only on the board surface but also the backside.

(5) Actions in strong magnetic field

Use caution when using the IC in the presence of a strong magnetic field as doing so may cause the IC to malfunction.

(6) ASO

When using the IC, set the output transistor for the motor so that it does not exceed absolute maximum ratings or ASO.

(7) Thermal shutdown circuit

The IC has a built-in thermal shutdown circuit (TSD circuit). If the chip temperature becomes $T_{jmax}=150^{\circ}\text{C}$, and higher, coil output to the motor and regulator output will be OFF, and reset output will be L. The TSD circuit is designed only to shut the IC off to prevent runaway thermal operation. It is not designed to protect or indemnify peripheral equipment. Do not use the TSD function to protect peripheral equipment.

(8) Ground Wiring Pattern

When using both small signal and large current GND patterns, it is recommended to isolate the two ground patterns, placing a single ground point at the application's reference point so that the pattern wiring resistance and voltage variations caused by large currents do not cause variations in the small signal ground voltage. Be careful not to change the GND wiring pattern of any external components, either.

Notes

No copying or reproduction of this document, in part or in whole, is permitted without the consent of ROHM CO.,LTD.

The content specified herein is subject to change for improvement without notice.

The content specified herein is for the purpose of introducing ROHM's products (hereinafter "Products"). If you wish to use any such Product, please be sure to refer to the specifications, which can be obtained from ROHM upon request.

Examples of application circuits, circuit constants and any other information contained herein illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.

Great care was taken in ensuring the accuracy of the information specified in this document. However, should you incur any damage arising from any inaccuracy or misprint of such information, ROHM shall bear no responsibility for such damage.

The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM and other parties. ROHM shall bear no responsibility whatsoever for any dispute arising from the use of such technical information.

The Products specified in this document are intended to be used with general-use electronic equipment or devices (such as audio visual equipment, office-automation equipment, communication devices, electronic appliances and amusement devices).

The Products are not designed to be radiation tolerant.

While ROHM always makes efforts to enhance the quality and reliability of its Products, a Product may fail or malfunction for a variety of reasons.

Please be sure to implement in your equipment using the Products safety measures to guard against the possibility of physical injury, fire or any other damage caused in the event of the failure of any Product, such as derating, redundancy, fire control and fail-safe designs. ROHM shall bear no responsibility whatsoever for your use of any Product outside of the prescribed scope or not in accordance with the instruction manual.

The Products are not designed or manufactured to be used with any equipment, device or system which requires an extremely high level of reliability the failure or malfunction of which may result in a direct threat to human life or create a risk of human injury (such as a medical instrument, transportation equipment, aerospace machinery, nuclear-reactor controller, fuel-controller or other safety device). ROHM shall bear no responsibility in any way for use of any of the Products for the above special purposes. If a Product is intended to be used for any such special purpose, please contact a ROHM sales representative before purchasing.

If you intend to export or ship overseas any Product or technology specified herein that may be controlled under the Foreign Exchange and the Foreign Trade Law, you will be required to obtain a license or permit under the Law.

Thank you for your accessing to ROHM product informations.

More detail product informations and catalogs are available, please contact your nearest sales office.

ROHM Customer Support System

THE AMERICAS / EUROPE / ASIA / JAPAN

www.rohm.com

Contact us : webmaster@rohm.co.jp