

# MEW1000 Series


2W, Wide Input Range SIP, Single & Dual Output DC/DC Converters




## Key Features




- Efficiency up to 80%
- 1500VDC Isolation
- MTBF > 1,000,000 Hours
- 4:1 Wide Input Range
- Low Cost
- Remote On/Off Control
- Low Ripple and Noise
- Temperature Performance  $-40^{\circ}\text{C}$  to  $+75^{\circ}\text{C}$
- UL 94V-0 Package Material
- Internal SMD Construction




Low Noise




Low Profile




Low Cost



I/O Isolation



Remote on/off



Wide Range

Minmax's MEW1000-Series power modules are low-profile dc-dc converters that operate over input voltage ranges of 9–36VDC and 18–75VDC which provide precisely regulated output voltages of 3.3V, 5V, 12V, 15V,  $\pm 5\text{V}$ ,  $\pm 12\text{V}$  and  $\pm 15\text{VDC}$ .

The MEW1000 series is an excellent selection for data communication equipments, mobile battery driven equipments, distributed power systems, telecommunication equipments, mixed analog/digital subsystems, process/machine control equipments, computer peripheral systems and industrial robot systems.

The modules have a maximum power rating of 2W and a typical full-load efficiency of 80%, continuous short circuit, 30mV output ripple, built-in filtering for both input and output minimize the need for external filtering.

## Absolute Maximum Ratings

| Parameter                                      |                    | Min. | Max.  | Unit               |
|--|--------------------|------|-------|--------------------|
| Input Surge Voltage<br>(1000 mS)               | 24VDC Input Models | -0.7 | 50    | VDC                |
|  | 48VDC Input Models | -0.7 | 100   | VDC                |
| Lead Temperature (1.5mm from case for 10 Sec.) |                    | ---  | 260   | $^{\circ}\text{C}$ |
| Internal Power Dissipation                     |                    | ---  | 2,500 | mW                 |

Exceeding the absolute maximum ratings of the unit could cause damage. These are not continuous operating ratings.

## Environmental Specifications

| Parameter             | Conditions          | Min. | Max. | Unit               |
|-----------------------|---------------------|------|------|--------------------|
| Operating Temperature | Ambient             | -40  | +75  | $^{\circ}\text{C}$ |
| Operating Temperature | Case                | -40  | +90  | $^{\circ}\text{C}$ |
| Storage Temperature   |                     | -55  | +105 | $^{\circ}\text{C}$ |
| Humidity              |                     | ---  | 95   | %                  |
| Cooling               | Free-Air Convection |      |      |                    |

## Model Selection Guide

| Model Number | Input Voltage   | Output Voltage | Output Current |      | Input Current |           | Reflected Ripple Current | Efficiency |
|--------------|-----------------|----------------|----------------|------|---------------|-----------|--------------------------|------------|
|              |                 |                | Max.           | Min. | @Max. Load    | @No Load  |                          | @Max. Load |
|              | VDC             | VDC            | mA             | mA   | mA (Typ.)     | mA (Typ.) | mA (Typ.)                | % (Typ.)   |
| MEW1021      | 24<br>(9 ~ 36)  | 3.3            | 500            | 125  | 97            | 20        | 300                      | 71         |
| MEW1022      |                 | 5              | 400            | 100  | 110           |           |                          | 76         |
| MEW1023      |                 | 12             | 167            | 42   | 106           |           |                          | 79         |
| MEW1024      |                 | 15             | 134            | 33   | 105           |           |                          | 80         |
| MEW1025      |                 | ±5             | ±200           | ±50  | 114           |           |                          | 73         |
| MEW1026      |                 | ±12            | ±83            | ±21  | 108           |           |                          | 77         |
| MEW1027      |                 | ±15            | ±67            | ±17  | 106           |           |                          | 79         |
| MEW1031      | 48<br>(18 ~ 75) | 3.3            | 500            | 125  | 49            | 15        | 600                      | 70         |
| MEW1032      |                 | 5              | 400            | 100  | 58            |           |                          | 72         |
| MEW1033      |                 | 12             | 167            | 42   | 54            |           |                          | 78         |
| MEW1034      |                 | 15             | 134            | 33   | 54            |           |                          | 78         |
| MEW1035      |                 | ±5             | ±200           | ±50  | 60            |           |                          | 70         |
| MEW1036      |                 | ±12            | ±83            | ±21  | 55            |           |                          | 76         |
| MEW1037      |                 | ±15            | ±67            | ±17  | 55            |           |                          | 76         |

## Capacitive Load

| Models by Vout          | 3.3V | 5V   | 12V | 15V | ±5V # | ±12V # | ±15V # | Unit |
|-------------------------|------|------|-----|-----|-------|--------|--------|------|
| Maximum Capacitive Load | 2200 | 1000 | 170 | 110 | 470   | 100    | 47     | uF   |

# For each output

## Input Fuse Selection Guide

| 24V Input Models       | 48V Input Models       |
|------------------------|------------------------|
| 350mA Slow – Blow Type | 135mA Slow – Blow Type |

## Input Specifications

| Parameter                      | Model            | Min.           | Typ. | Max. | Unit |
|--------------------------------|------------------|----------------|------|------|------|
| Start Voltage                  | 24V Input Models | 4.5            | 6    | 8.5  | VDC  |
|                                | 48V Input Models | 8.5            | 12   | 17   |      |
| Under Voltage Shutdown         | 24V Input Models | ---            | ---  | 8    | VDC  |
|                                | 48V Input Models | ---            | ---  | 16   |      |
| Reverse Polarity Input Current | All Models       | ---            | ---  | 0.5  | A    |
| Short Circuit Input Power      |                  | ---            | ---  | 1500 | mW   |
| Input Filter                   |                  | Capacitor type |      |      |      |

# MEW1000 Series

## Output Specifications

| Parameter                    | Conditions                  | Min. | Typ.  | Max.  | Unit   |
|------------------------------|-----------------------------|------|-------|-------|--------|
| Output Voltage Accuracy      |                             | ---  | ±1.0  | ±2.0  | %      |
| Output Voltage Balance       | Dual Output, Balanced Loads | ---  | ±1.0  | ±2.0  | %      |
| Line Regulation              | Vin=Min. to Max.            | ---  | ±0.3  | ±0.5  | %      |
| Load Regulation              | Io=25% to 100%              | ---  | ±0.5  | ±0.75 | %      |
| Ripple & Noise (20MHz)       |                             | ---  | 30    | 50    | mV P-P |
| Ripple & Noise (20MHz)       | Over Line, Load & Temp.     | ---  | ---   | 75    | mV P-P |
| Ripple & Noise (20MHz)       |                             | ---  | ---   | 15    | mV rms |
| Over Power Protection        |                             | 120  | ---   | ---   | %      |
| Transient Recovery Time      | 25% Load Step Change        | ---  | 100   | 300   | uS     |
| Transient Response Deviation |                             | ---  | ±3    | ±5    | %      |
| Temperature Coefficient      |                             | ---  | ±0.01 | ±0.02 | %/°C   |
| Output Short Circuit         | Continuous                  |      |       |       |        |

## General Specifications

| Parameter               | Conditions                          | Min. | Typ. | Max. | Unit    |
|-------------------------|-------------------------------------|------|------|------|---------|
| Isolation Voltage Rated | 60 Seconds                          | 1500 | ---  | ---  | VDC     |
| Isolation Voltage Test  | Flash Tested for 1 Second           | 1650 | ---  | ---  | VDC     |
| Isolation Resistance    | 500VDC                              | 1000 | ---  | ---  | MΩ      |
| Isolation Capacitance   | 100KHz, 1V                          | ---  | 250  | 500  | pF      |
| Switching Frequency     |                                     | ---  | 300  | ---  | KHz     |
| MTBF                    | MIL-HDBK-217F @ 25°C, Ground Benign | 1000 | ---  | ---  | K Hours |

## Remote On/Off Control


| Parameter                     | Conditions  | Min. | Typ. | Max. | Unit |
|-------------------------------|---|------|------|------|------|
| Supply On                     | Under 0.6 VDC or Open Circuit, drops down to 0VDC by 2mV/°C |      |      |      |      |
| Supply Off                    |   | 2.9  | ---  | 15   | VDC  |
| Device Standby Input Current  |   | ---  | 1    | 3    | mA   |
| Control Input Current ( on )  | Vin = 0V  | ---  | ---  | -1   | mA   |
| Control Input Current ( off ) | Vin = 5.0V  | ---  | ---  | 1    | mA   |
| Control Common                | Referenced to Negative Input                                |      |      |      |      |

### Notes:


1. Specifications typical at Ta=+25°C, resistive load, nominal input voltage, rated output current unless otherwise noted.
2. Transient recovery time is measured to within 1% error band for a step change in output load of 75% to 100%.
3. Ripple & Noise measurement bandwidth is 0-20 MHz.
4. These power converters require a minimum output loading to maintain specified regulation.
5. Operation under no-load conditions will not damage these modules; however, they may not meet all specifications listed.
6. All DC/DC converters should be externally fused on the front end for protection.
7. Other input and output voltage may be available, please contact factory.
8. Specifications subject to change without notice.

## Block Diagram


### Single Output

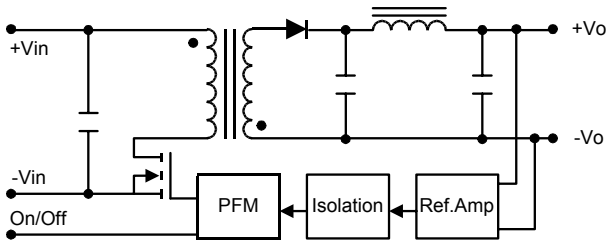


### Dual Output

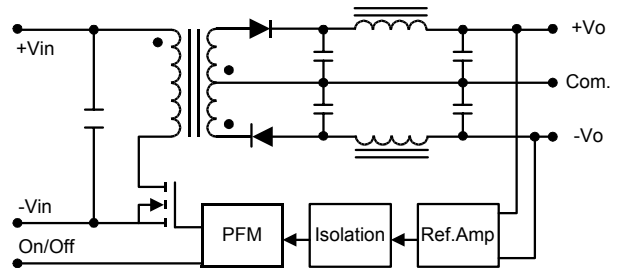


## Input Voltage Transient Rating

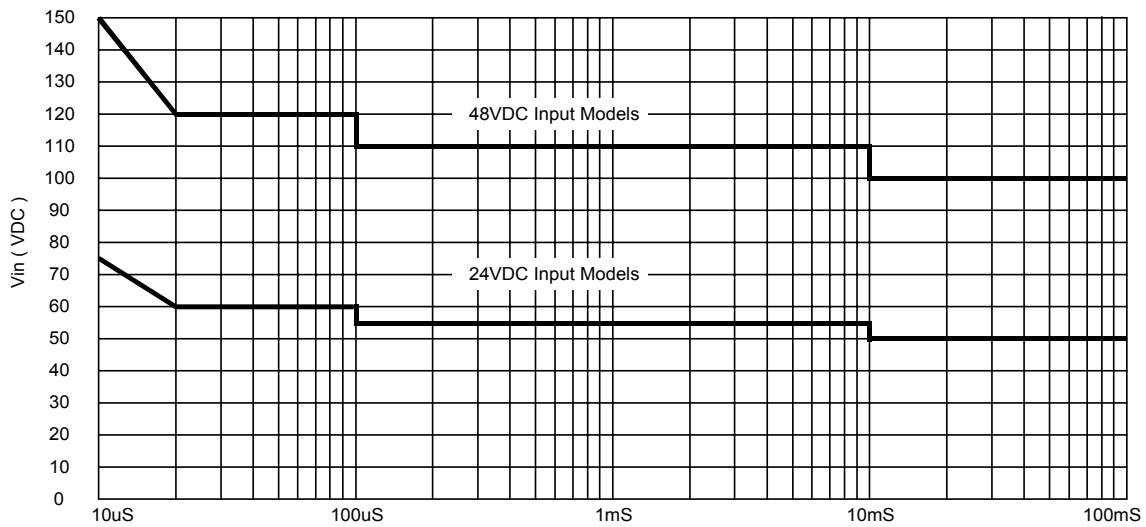


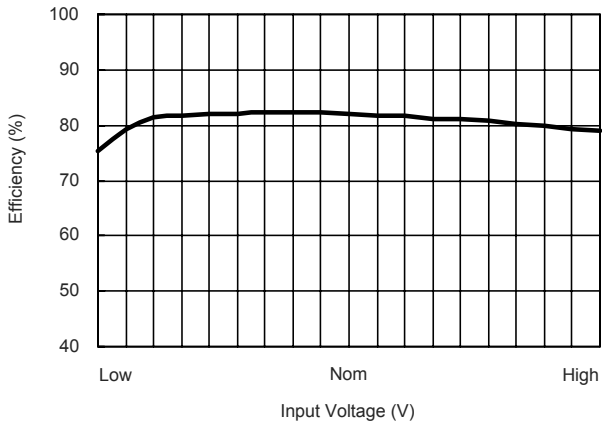


**Efficiency vs Input Voltage ( Single Output )**

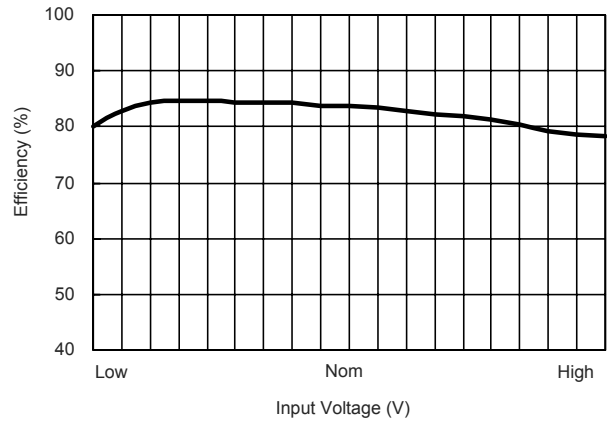


**Efficiency vs Input Voltage ( Dual Output )**

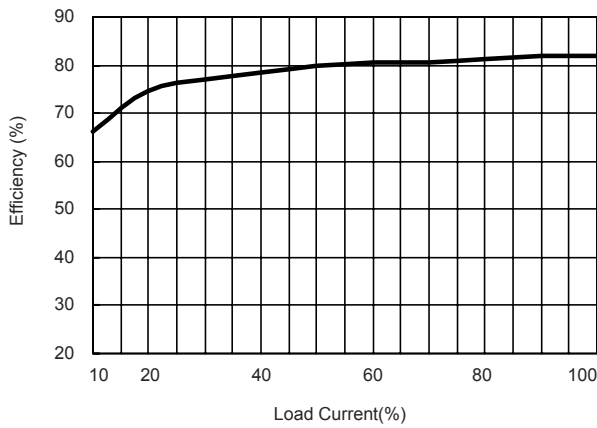

**Efficiency vs Output Load ( Single Output )**

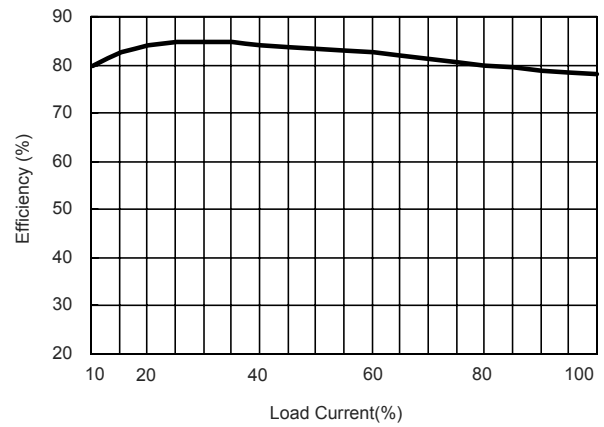

**Efficiency vs Output Load ( Dual Output )**

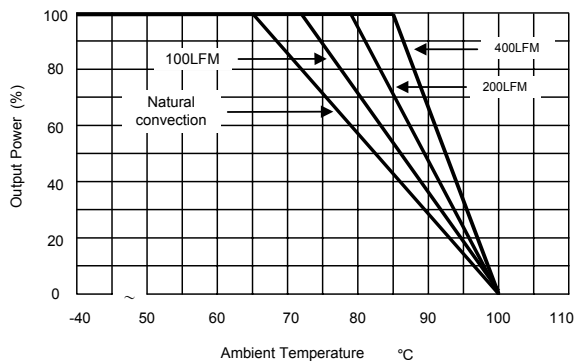

**Derating Curve**


## Test Configurations

### Input Reflected-Ripple Current Test Setup

Input reflected-ripple current is measured with an inductor  $L_{in}$  (4.7 $\mu$ H) and  $C_{in}$  (220 $\mu$ F, ESR < 1.0 $\Omega$  at 100 kHz) to simulated source impedance.

Capacitor  $C_{in}$ , offsets possible battery impedance.


Current ripple is measured at the input terminals of the module, measurement bandwidth is 0–500KHz.

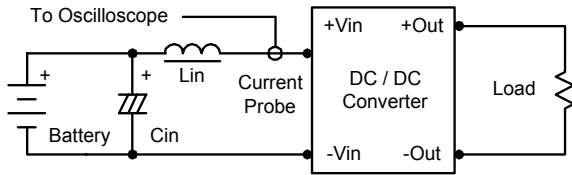

### Peak-to-Peak Output Noise Measurement Test

Use a  $C_{out}$  0.47 $\mu$ F ceramic capacitor.

Scope measurement should be made by using a BNC socket, measurement bandwidth is 0–20 MHz. Position the load between 50 mm and 75 mm from the DC/DC Converter.

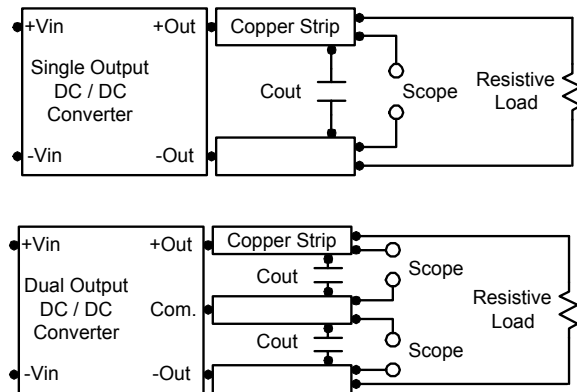

## Design & Feature Considerations

### Remote On/Off

Negative logic remote on/off turns the module off during a logic high voltage on the remote on/off pin, and on during a logic low.

To turn the power module on and off, the user must supply a switch to control the voltage between the on/off terminal and the  $-V_{in}$  terminal.

The switch can be an open collector or equivalent.

A logic high is 2.9V to 15V.

A logic low is under 0.6 VDC or open circuit, drops down to 0VDC by 2mV/°C

The maximum sink current at on/off terminal during a logic low is 1 mA.

The maximum allowable leakage current of the switch at on/off terminal =(under 0.6VDC or open circuit) is 1mA.

### Maximum Capacitive Load

The MEW1000 series has limitation of maximum connected capacitance on the output.

The power module may operate in current limiting mode during start-up, affecting the ramp-up and the startup time.

The maximum capacitance can be found in the data sheet.

### Overcurrent Protection


To provide protection in a fault (output overload) condition, the unit is equipped with internal current limiting circuitry and can endure current limiting for an unlimited duration. At the point of current-limit inception, the unit shifts from voltage control to current control. The unit operates normally once the output current is brought back into its specified range.

### Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module.

In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor on the input to insure startup.


By using a good quality low Equivalent Series Resistance (ESR < 1.0 $\Omega$  at 100 kHz) capacitor of a 1.5 $\mu$ F for the 24V and 48V devices, capacitor mounted close to the power module helps ensure stability of the unit.

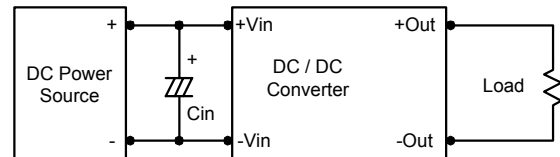

### Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance.


To reduce output ripple, it is recommended that 3.3 $\mu$ F capacitors are used on output.

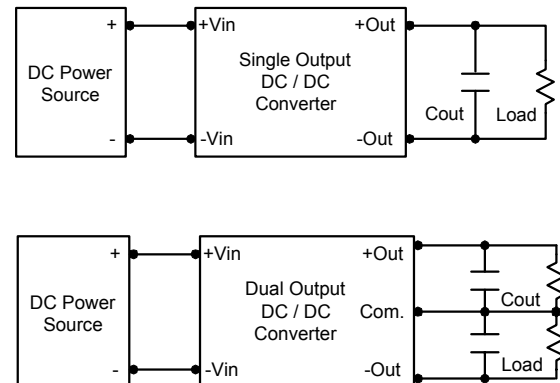


## Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module, and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 90°C.

The derating curves were determined from measurements obtained in an experimental apparatus.

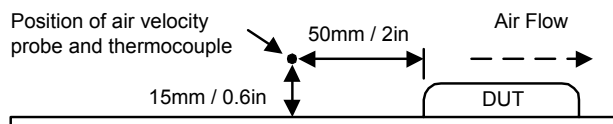

## Mechanical Dimensions

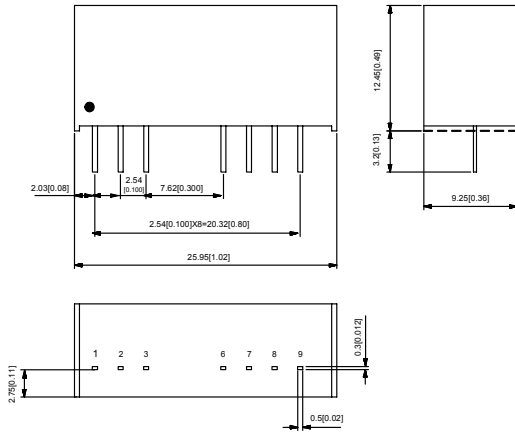

## Physical Characteristics

|                      |   |  |
|----------------------|---|--|
| <b>Case Size</b>     | : | 25.95×9.25×12.45 mm<br>1.02×0.36×0.49 inches |
| <b>Case Material</b> | : | Non-Conductive Black Plastic                 |
| <b>Weight</b>        | : | 6.5g   |
| <b>Flammability</b>  | : | UL94V-0                                      |

| <b>Tolerance</b> | <b>Millimeters</b> | <b>Inches</b> |
|------------------|--------------------|---------------|
|                  | X.X±0.25           | X.XX±0.01     |
|                  | X.XX±0.13          | X.XXX±0.005   |
| <b>Pin</b>       | ±0.05              | ±0.002        |

## Pin Connections

| <b>Pin</b> | <b>Single Output</b> | <b>Dual Output</b> |
|------------|----------------------|--------------------|
| 1          | -Vin                 | -Vin               |
| 2          | +Vin                 | +Vin               |
| 3          | Remote On/Off        | Remote On/Off      |
| 6          | +Vout                | +Vout              |
| 7          | NC                   | Common             |
| 8          | NC                   | NC                 |
| 9          | -Vout                | -Vout              |

NC: No Connection