


# SKR 47F

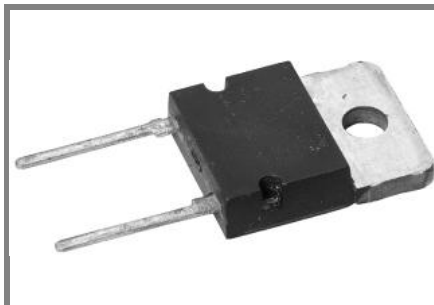

## Fast Recovery Rectifier Diode

**SKR 47F**

### Features


- CAL-Diode (controlled axial lifetime technology), patent no. DE 431044
- Very short recovery time
- Soft recovery under all conditions
- Up to 1700 V reverse voltages
- Epoxy meets UL 94V-0 flammability classification

### Typical Applications





- Inverse diode for power transistor
- Inverter, UPS
- Snubber and clamping diode


$V_{RSM}$ V	$V_{RRM}$ V	$I_{FRMS} = 74$ A (maximum value for continuous operation) $I_{FAV} = 47$ A (sin. 180; 50 Hz; $T_c = 85$ °C)	
1500	1500	SKR 47F15	
1700	1700	SKR 47F17	

Symbol	Conditions	Values	Units
$I_{FAV}$	sin. 180; $T_c = 85$ (100) °C	47 (40)	A
$I_{FSM}$	$T_{vj} = 25$ °C; 10 ms	500	A
	$T_{vj} = 150$ °C; 10 ms	450	A
$i^2t$	$T_{vj} = 25$ °C; 8,3 ... 10 ms	1250	A <sup>2</sup> s
	$T_{vj} = 150$ °C; 8,3 ... 10 ms	1000	A <sup>2</sup> s
$V_F$	$T_{vj} = 25$ °C; $I_F = 50$ A	max. 2,7	V
$V_{(TO)}$	$T_{vj} = 150$ °C	max. 1,5	V
$r_T$	$T_{vj} = 150$ °C	max. 21	mΩ
$I_{RD}$	$T_{vj} = 25$ °C; $V_{RD} = V_{RRM}$	max. 0,2	mA
$I_{RD}$	$T_{vj} = 125$ °C; $V_{RD} = V_{RRM}$	max. 10	mA
$Q_{rr}$	$T_{vj} = 25$ °C, $I_F = 50$ A,	7	μC
$I_{RM}$	$-di/dt = 800$ A/μs, $V_R = 1200$ V	30	A
$t_{rr}$		680	ns
$E_{rr}$		-	mJ
$R_{th(j-c)}$		0,35	K/W
$R_{th(c-s)}$		0,25	K/W
$T_{vj}$		- 40 ... + 150	°C
$T_{stg}$		- 40 ... + 150	°C
$V_{isol}$		-	V~
$M_s$	to heatsink	0,7 ... 1	Nm
$a$			m/s <sup>2</sup>
$m$	approx.	5	g
Case		E 40	



SKR

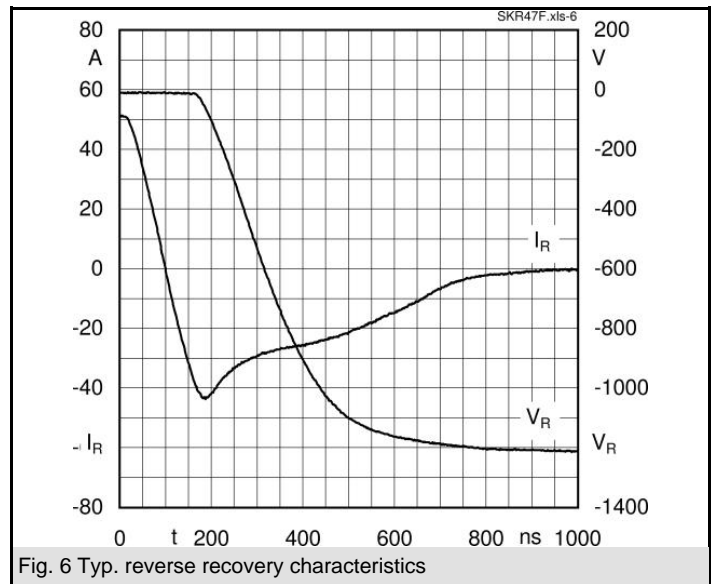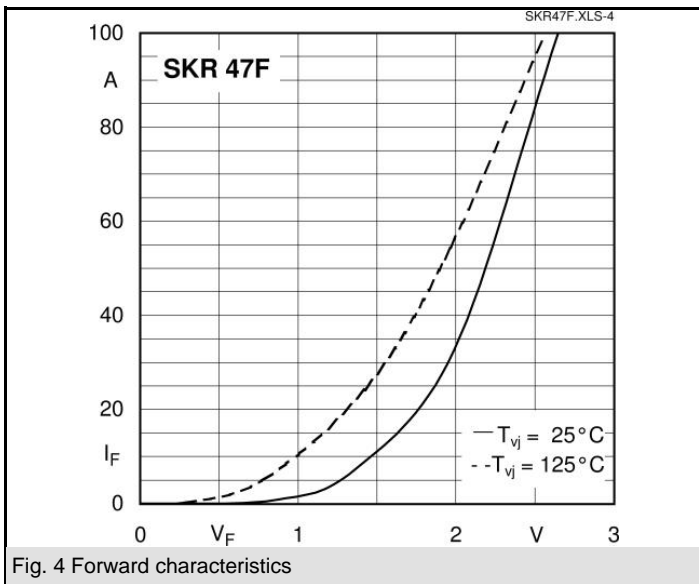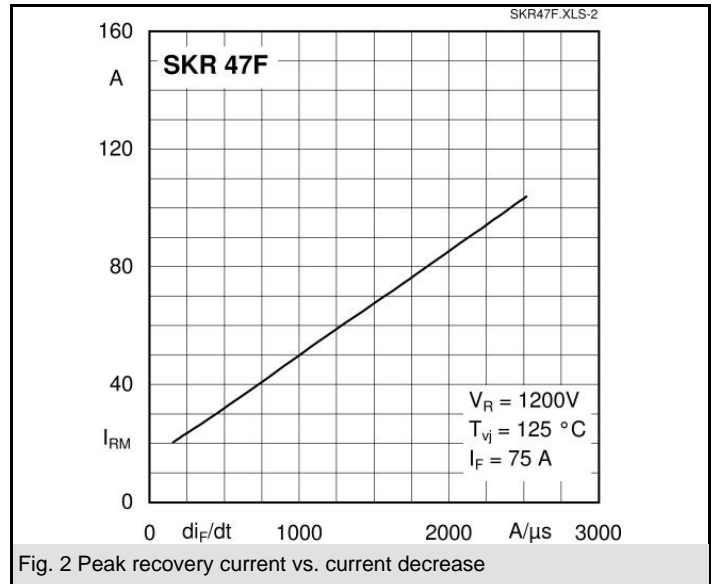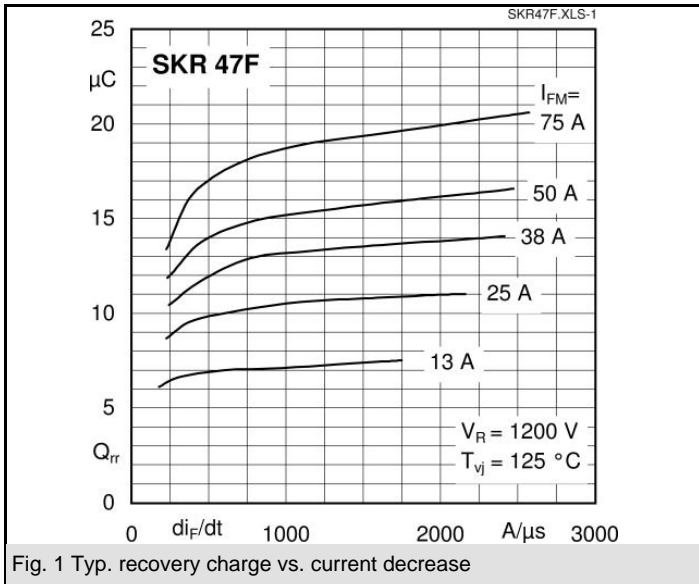

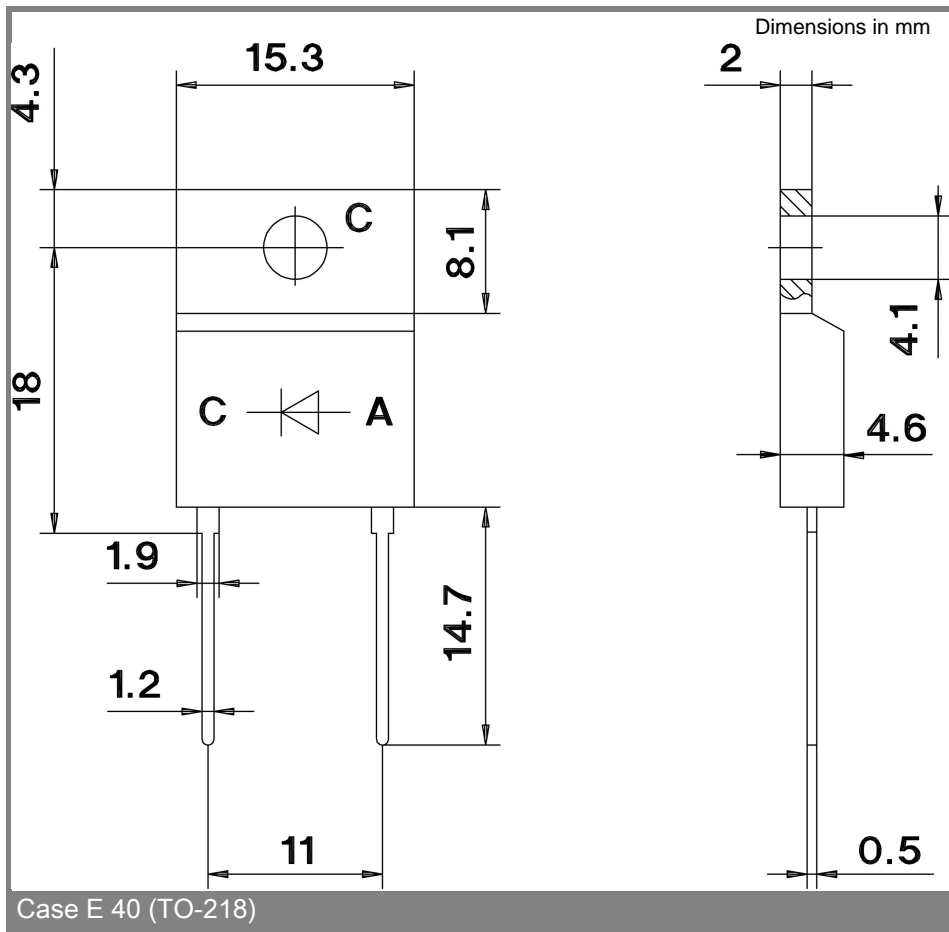

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.