
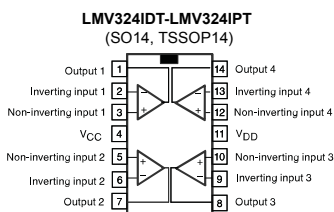




## Low cost, low power, input/output rail-to-rail operational amplifiers



## Features

- Operating range from  $V_{CC} = 2.7$  to 6 V
- Rail-to-rail input and output
- Extended  $V_{icm}$  ( $V_{DD} - 0.2$  V to  $V_{CC} + 0.2$  V)
- Low supply current (145  $\mu$ A)
- Gain bandwidth product (1 MHz)
- ESD tolerance (2 kV)

## Related products

- See [LMV321L](#), [LMV324L](#), [LMV358L](#) for newer technological version
- See [TSV851](#), [TSV852](#), [TSV854](#) for enhanced performances

## Applications

- Battery powered electronic equipment
- Personal medical care (glucose meters)
- Laptops

### Maturity status link

[LMV321](#)
[LMV324](#)
[LMV358](#)

## Description

The [LMV321/LMV324/LMV358](#) family (single, dual, and quad) answers the need for low cost, general-purpose operational amplifiers. They operate with voltages as low as 2.7 V and feature both input and output rail-to-rail, 145  $\mu$ A consumption current, and 1 MHz gain bandwidth product (GBP).

With such a low consumption and a sufficient GBP for many applications, these op amps are well suited for any kind of battery supplied and portable equipment application.

The [LMV321](#) device is housed in the space-saving 5-pin SOT23-5 package, which simplifies board design. The SOT23-5 has two pinning configurations to answer all application requirements.

## 1 Absolute maximum ratings and operating conditions

**Table 1. Absolute maximum ratings**

| Symbol     | Parameter   | Value                            | Unit |      |
|------------|---|----------------------------------|------|------|
| $V_{CC}$   | Supply voltage <sup>(1)</sup>                         | 7                                | V    |      |
| $V_{id}$   | Differential input voltage <sup>(2)</sup>             | ±1                               |      |      |
| $V_{in}$   | Input voltage   | $V_{DD} - 0.3$ to $V_{CC} + 0.3$ |      |      |
| $T_{oper}$ | Operating free air temperature range                  | -40 to 125                       | °C   |      |
| $T_{stg}$  | Storage temperature                                   | -65 to 150                       |      |      |
| $T_j$      | Maximum junction temperature                          | 150                              |      |      |
| $R_{thja}$ | Thermal resistance junction-to-ambient <sup>(3)</sup> | SOT23-5                          | 250  | °C/W |
|            |   | SO8                              | 125  |      |
|            |   | TSSOP8                           | 120  |      |
|            |   | SO14                             | 103  |      |
|            |   | TSSOP14                          | 100  |      |
| $R_{thjc}$ | Thermal resistance junction-to-case <sup>(3)</sup>    | SOT23-5                          | 81   |      |
|            |   | SO8                              | 40   |      |
|            |   | TSSOP8                           | 37   |      |
|            |   | SO14                             | 31   |      |
|            |   | TSSOP14                          | 32   |      |
| ESD        | HBM: human body model <sup>(4)</sup>                  | 2                                | kV   |      |
|            | MM: machine model <sup>(5)</sup>                      | 200                              | V    |      |
|            | CDM: charged device model <sup>(6)</sup>              | 1.5                              | kV   |      |
|            | Lead temperature (soldering, 10 s)                    | 250                              | °C   |      |
|            | Output short-circuit duration                         | See <sup>(7)</sup>               |      |      |

1. All voltage values, except differential voltage are with respect to network terminal.
2. The differential voltage is the non-inverting input terminal with respect to the inverting input terminal. If  $V_{id} > \pm 1$  V, the maximum input current must not exceed  $\pm 1$  mA. In this case ( $V_{id} > \pm 1$  V), an input series resistor must be added to limit input current.
3. Short-circuits can cause excessive heating. Destructive dissipation can result from simultaneous short-circuits on all amplifiers. All values are typical.
4. Human body model: a 100 pF capacitor is charged to the specified voltage, then discharged through a 1.5 kΩ resistor between two pins of the device. This is done for all couples of connected pin combinations while the other pins are floating.
5. Machine model: a 200 pF capacitor is charged to the specified voltage, then discharged directly between two pins of the device with no external series resistor (internal resistor < 5 Ω). This is done for all couples of connected pin combinations while the other pins are floating.
6. Charged device model: all pins and the package are charged together to the specified voltage and then discharged directly to the ground through only one pin. This is done for all pins. No value specified for CDM on SOT23-5 package. The value is given for SO8 and TSSOP packages.
7. Short-circuits from the output to  $V_{CC}$  can cause excessive heating. The maximum output current is approximately 48 mA, independent of the magnitude of  $V_{CC}$ . Destructive dissipation can result from simultaneous short-circuits on all amplifiers.

**Table 2. Operating conditions**

| Symbol     | Parameter                                      | Value                            | Unit |
|------------|--|----------------------------------|------|
| $V_{CC}$   | Supply voltage                                 | 2.7 to 6                         | V    |
| $V_{icm}$  | Common mode input voltage range <sup>(1)</sup> | $V_{DD} - 0.2$ to $V_{CC} + 0.2$ |      |
| $V_{icm}$  | Common mode input voltage range <sup>(2)</sup> | $V_{DD}$ to $V_{CC}$             |      |
| $T_{oper}$ | Operating free air temperature range           | -40 to 125                       | °C   |

1. At 25 °C, for  $2.7 \leq V_{CC} \leq 6$  V,  $V_{icm}$  is extended to  $V_{DD} - 0.2$  V,  $V_{CC} + 0.2$  V.

2. In full temperature range, both rails can be reached when  $V_{CC}$  does not exceed 5.5 V.

## 2 Electrical characteristics

**Table 3. Electrical characteristics at  $V_{CC} = 2.7\text{ V}$ ,  $V_{DD} = 0\text{ V}$ ,  $C_L$  and  $R_L$  connected to  $V_{CC}/2$ ,  $T_{amb} = 25\text{ °C}$  (unless otherwise specified)**







| Symbol                   | Parameter                      | Conditions   | Min. | Typ. | Max. | Unit                         |
|--------------------------|--------------------------------|--|------|------|------|------------------------------|
| $V_{io}$                 | Input offset voltage           | $V_{icm} = V_{out} = V_{CC}/2$   |      | 0.1  | 3    | mV                           |
|                          |                                | $T_{min} \leq T_{amb} \leq T_{max}$  |      |      | 6    |                              |
| $\Delta V_{io}/\Delta T$ | Input offset voltage drift     |  |      | 2    |      | $\mu\text{V}/\text{°C}$      |
| $I_{io}$                 | Input offset current           | $V_{icm} = V_{out} = V_{CC}/2$ <sup>(1)</sup>  |      | 1    | 9    | nA                           |
|                          |                                | $T_{min} \leq T_{amb} \leq T_{max}$  |      |      | 25   |                              |
| $I_{ib}$                 | Input bias current             | $V_{icm} = V_{out} = V_{CC}/2$ <sup>(1)</sup>  |      | 10   | 50   |                              |
|                          |                                | $T_{min} \leq T_{amb} \leq T_{max}$  |      |      | 85   |                              |
| CMR                      | Common mode rejection ratio    | $0 \leq V_{icm} \leq V_{CC}$   | 55   | 85   |      | dB                           |
| SVR                      | Supply voltage rejection ratio | $V_{icm} = V_{CC}/2$   | 70   | 80   |      |                              |
| $A_{vd}$                 | Large signal voltage gain      | $V_{out} = 0.5\text{ V to } 2.2\text{ V}$ , $R_L = 10\text{ k}\Omega$                          | 80   | 100  |      |                              |
|                          |                                | $V_{out} = 0.5\text{ V to } 2.2\text{ V}$ , $R_L = 2\text{ k}\Omega$                           | 70   | 88   |      |                              |
| $V_{OH}$                 | High level output voltage      | $V_{id} = 100\text{ mV}$ , $T_{min} \leq T_{amb} \leq T_{max}$ ,<br>$R_L = 10\text{ k}\Omega$  | 2.6  | 2.65 |      | V                            |
|                          |                                | $V_{id} = 100\text{ mV}$ , $T_{min} \leq T_{amb} \leq T_{max}$ ,<br>$R_L = 2\text{ k}\Omega$   | 2.55 | 2.6  |      |                              |
| $V_{OL}$                 | Low level output voltage       | $V_{id} = -100\text{ mV}$ , $T_{min} \leq T_{amb} \leq T_{max}$ ,<br>$R_L = 10\text{ k}\Omega$ |      | 15   | 90   | mV                           |
|                          |                                | $V_{id} = -100\text{ mV}$ , $T_{min} \leq T_{amb} \leq T_{max}$ ,<br>$R_L = 2\text{ k}\Omega$  |      | 50   | 100  |                              |
| $I_o$                    | Output current                 | Output source current, $V_{id} = 100\text{ mV}$ ,<br>$V_O = V_{DD}$                            | 5    | 46   |      | mA                           |
|                          |                                | Output sink current, $V_{id} = -100\text{ mV}$ ,<br>$V_O = V_{CC}$                             | 5    | 46   |      |                              |
| $I_{CC}$                 | Supply current (per amplifier) | $V_{out} = V_{CC}/2$ , $A_{VCL} = 1$ , no load   |      | 145  | 200  | $\mu\text{A}$                |
|                          |                                | $T_{min} \leq T_{amb} \leq T_{max}$  |      |      | 230  |                              |
| GBP                      | Gain bandwidth product         | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$ ,<br>$f = 100\text{ kHz}$                    |      | 1    |      | MHz                          |
| SR                       | Slew rate                      | $R_L = 600\ \Omega$ , $C_L = 100\text{ pF}$ , $A_V = 1$  |      | 0.35 |      | $\text{V}/\mu\text{s}$       |
| $\phi_m$                 | Phase margin                   | $R_L = 600\ \Omega$ , $C_L = 100\text{ pF}$  |      | 44   |      | Degrees                      |
| en                       | Input voltage noise            |  |      | 40   |      | $\text{nV}/\sqrt{\text{Hz}}$ |
| THD                      | Total harmonic distortion      |  |      | 0.01 |      | %                            |

1. Maximum values include unavoidable inaccuracies of the industrial tests.


**Table 4. Electrical characteristics at  $V_{CC} = 5\text{ V}$ ,  $V_{DD} = 0\text{ V}$ ,  $C_L$  and  $R_L$  connected to  $V_{CC}/2$ ,  $T_{amb} = 25\text{ °C}$  (unless otherwise specified)**

| Symbol                   | Parameter                      | Conditions   | Min. | Typ. | Max. | Unit                    |
|--------------------------|--------------------------------|--|------|------|------|-------------------------|
| $V_{io}$                 | Input offset voltage           | $V_{icm} = V_{out} = V_{CC}/2$   |      | 0.1  | 3    | mV                      |
|                          |                                | $T_{min} \leq T_{amb} \leq T_{max}$  |      |      | 6    |                         |
| $\Delta V_{io}/\Delta T$ | Input offset voltage drift     |  |      | 2    |      | $\mu\text{V}/\text{°C}$ |
| $I_{io}$                 | Input offset current           | $V_{icm} = V_{out} = V_{CC}/2$ <sup>(1)</sup>  |      | 1    | 9    | nA                      |
|                          |                                | $T_{min} \leq T_{amb} \leq T_{max}$  |      |      | 25   |                         |
| $I_{ib}$                 | Input bias current             | $V_{icm} = V_{out} = V_{CC}/2$ <sup>(1)</sup>  |      | 16   | 63   |                         |
|                          |                                | $T_{min} \leq T_{amb} \leq T_{max}$  |      |      | 95   |                         |
| CMR                      | Common mode rejection ratio    | $0 \leq V_{icm} \leq V_{CC}$   | 65   | 95   |      | dB                      |
| SVR                      | Supply voltage rejection ratio | $V_{icm} = V_{CC}/2$   | 70   | 90   |      |                         |
| $A_{vd}$                 | Large signal voltage gain      | $V_{out} = 0.5\text{ V to }4.5\text{ V}$ , $R_L = 10\text{ k}\Omega$                           | 85   | 97   |      |                         |
|                          |                                | $V_{out} = 0.5\text{ V to }4.5\text{ V}$ , $R_L = 2\text{ k}\Omega$                            | 77   | 93   |      |                         |
| $V_{OH}$                 | High level output voltage      | $V_{id} = 100\text{ mV}$ , $T_{min} \leq T_{amb} \leq T_{max}$ ,<br>$R_L = 10\text{ k}\Omega$  | 4.85 | 4.95 |      | V                       |
|                          |                                | $V_{id} = 100\text{ mV}$ , $T_{min} \leq T_{amb} \leq T_{max}$ ,<br>$R_L = 2\text{ k}\Omega$   | 4.8  | 4.91 |      |                         |
| $V_{OL}$                 | Low level output voltage       | $V_{id} = -100\text{ mV}$ , $T_{min} \leq T_{amb} \leq T_{max}$ ,<br>$R_L = 10\text{ k}\Omega$ |      | 40   | 180  | mV                      |
|                          |                                | $V_{id} = -100\text{ mV}$ , $T_{min} \leq T_{amb} \leq T_{max}$ ,<br>$R_L = 2\text{ k}\Omega$  |      | 80   | 200  |                         |
| $I_o$                    | Output current                 | Output source current, $V_{id} = 100\text{ mV}$ , $V_O = V_{DD}$                               | 7    | 48   |      | mA                      |
|                          |                                | Output sink current, $V_{id} = -100\text{ mV}$ ,<br>$V_O = V_{CC}$                             | 7    | 48   |      |                         |
| $I_{CC}$                 | Supply current (per amplifier) | $V_{out} = V_{CC}/2$ , $A_{VCL} = 1$ , no load   |      | 162  | 220  | $\mu\text{A}$           |
|                          |                                | $T_{min} \leq T_{amb} \leq T_{max}$  |      |      | 250  |                         |
| GBP                      | Gain bandwidth product         | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$ ,<br>$f = 100\text{ kHz}$                    |      | 1.3  |      | MHz                     |
| SR                       | Slew rate                      | $R_L = 600\ \Omega$ , $C_L = 100\text{ pF}$ , $A_V = 1$  |      | 0.45 |      | V/ $\mu\text{s}$        |
| $\phi_m$                 | Phase margin                   | $R_L = 600\ \Omega$ , $C_L = 100\text{ pF}$  |      | 48   |      | Degrees                 |
| $e_n$                    | Input voltage noise            |  |      | 40   |      | nV/ $\sqrt{\text{Hz}}$  |
| THD                      | Total harmonic distortion      |  |      | 0.01 |      | %                       |


1. Maximum values include unavoidable inaccuracies of the industrial tests.

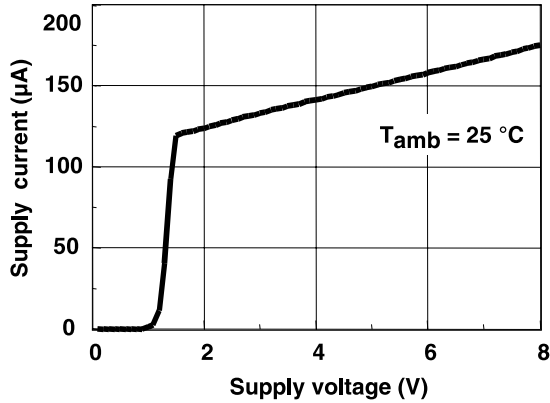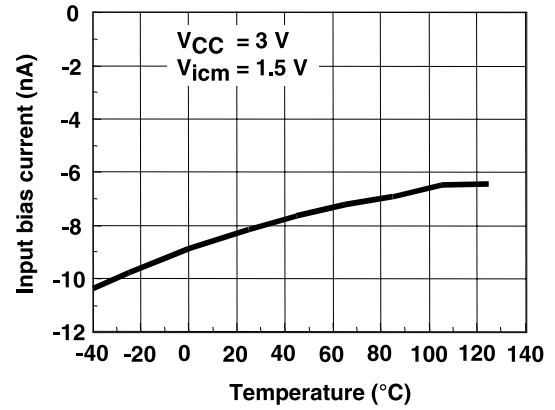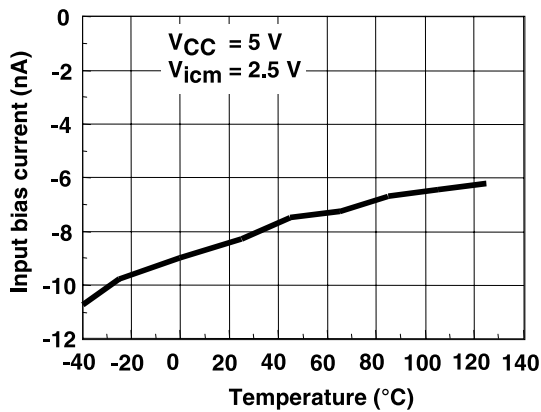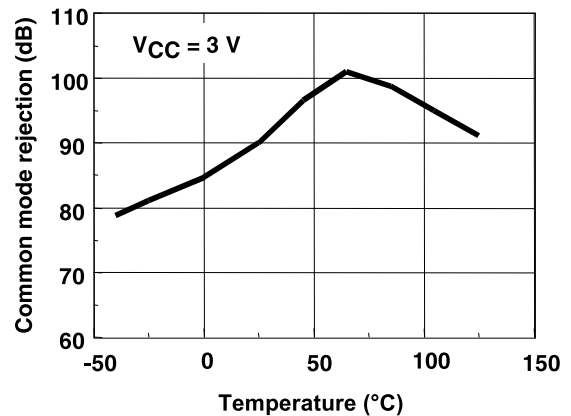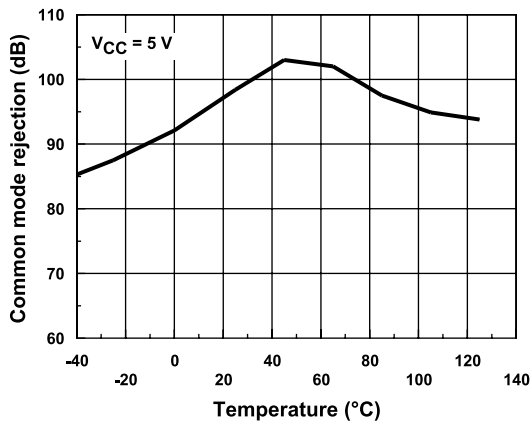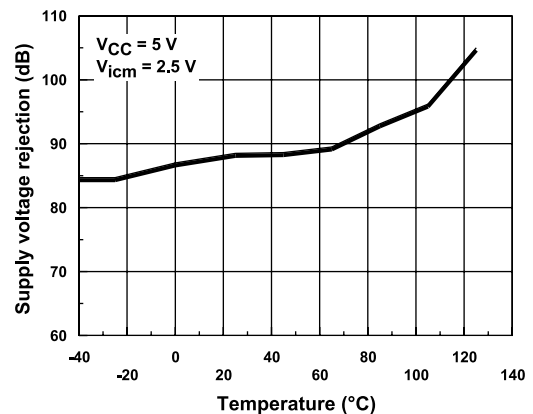**Figure 1. Supply current/amplifier vs. supply voltage**

**Figure 2. Input bias current vs. temperature ( $V_{CC} = 3\text{ V}$ ,  $V_{icm} = 1.5\text{ V}$ )**

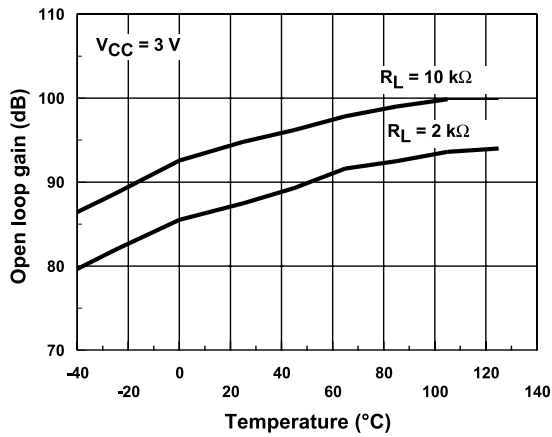**Figure 3. Input bias current vs. temperature ( $V_{CC} = 5\text{ V}$ ,  $V_{icm} = 2.5\text{ V}$ )**

**Figure 4. Common mode rejection vs. temperature ( $V_{CC} = 3\text{ V}$ )**

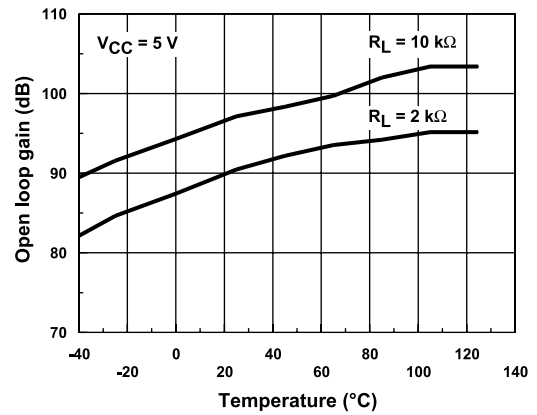**Figure 5. Common mode rejection vs. temperature ( $V_{CC} = 5\text{ V}$ )**

**Figure 6. Supply voltage rejection vs. temperature ( $V_{CC} = 5\text{ V}$ ,  $V_{icm} = 2.5\text{ V}$ )**


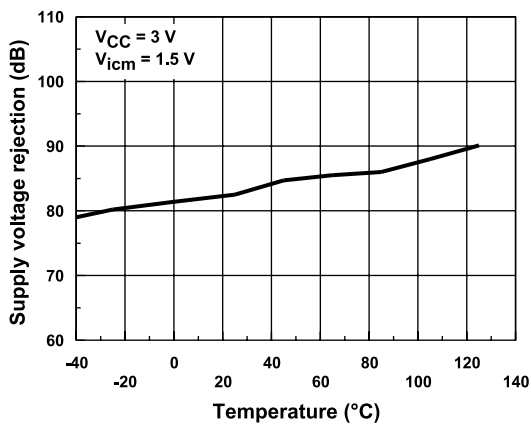
**Figure 7. Open loop gain vs. temperature ( $V_{CC} = 3\text{ V}$ ,  $R_L = 10/2\text{ kW}$ )**



**Figure 8. Open loop gain vs. temperature ( $V_{CC} = 5\text{ V}$ ,  $R_L = 10/2\text{ kW}$ )**



**Figure 9. Supply voltage rejection vs. temperature ( $V_{CC} = 3\text{ V}$ ,  $V_{icm} = 1.5\text{ V}$ )**



**Figure 10. Output current vs. output voltage ( $V_{CC} = 3\text{ V}$ ,  $V_{id} = 0.1\text{ V}$ ,  $V_{icm} = 1.5\text{ V}$ )**

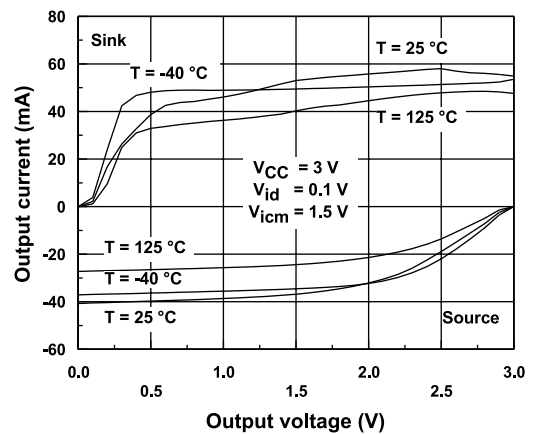




Figure 11. Output current vs. output voltage ( $V_{CC} = 5\text{ V}$ ,  $V_{id} = 0.1\text{ V}$ ,  $V_{icm} = 2.5\text{ V}$ )

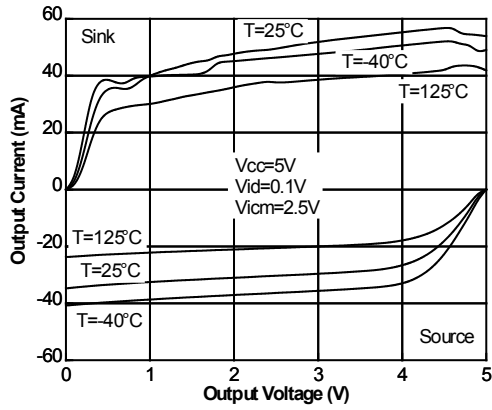


Figure 12. Noise versus frequency


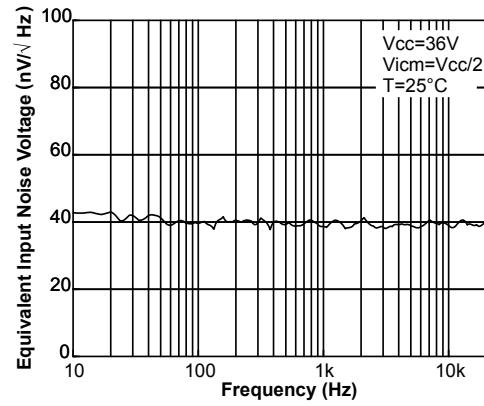


Figure 13. LMV358IYPT Input offset voltage vs. temperature at 5 V supply voltage

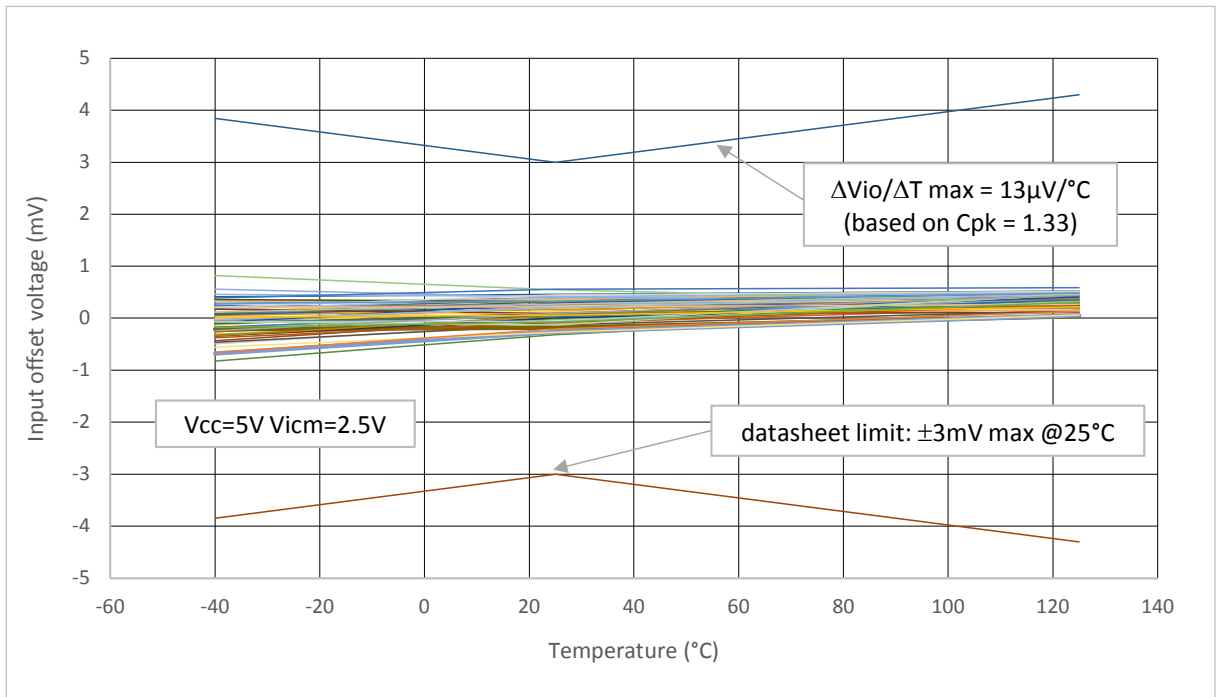

---

### 3 Package information

---

In order to meet environmental requirements, ST offers these devices in different grades of **ECOPACK** packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK is an ST trademark.

### 3.1 SOT23-5 package information

Figure 14. SOT23-5 package outline

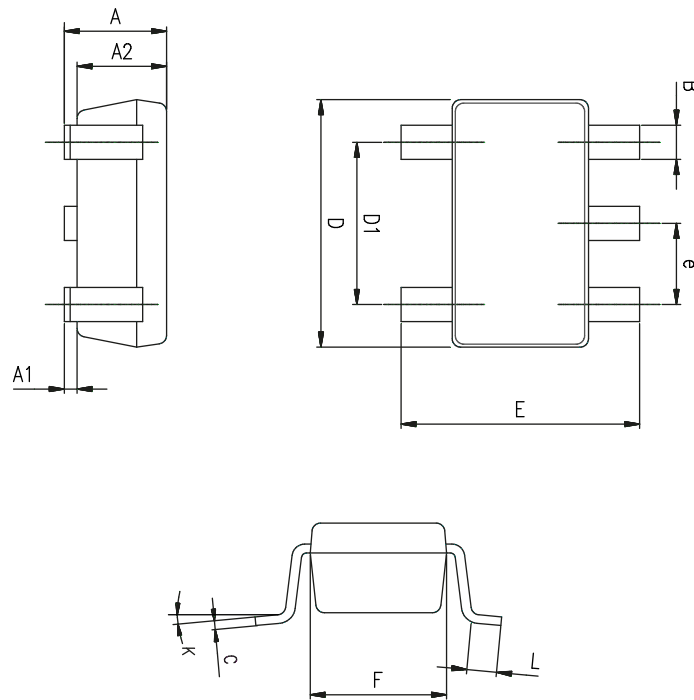


Table 5. SOT23-5 mechanical data

| Ref. | Dimensions  |      |            |           |       |            |
|------|-------------|------|------------|-----------|-------|------------|
|      | Millimeters |      |            | Inches    |       |            |
|      | Min.        | Typ. | Max.       | Min.      | Typ.  | Max.       |
| A    | 0.90        | 1.20 | 1.45       | 0.035     | 0.047 | 0.057      |
| A1   |             |      | 0.15       |           |       | 0.006      |
| A2   | 0.90        | 1.05 | 1.30       | 0.035     | 0.041 | 0.051      |
| B    | 0.35        | 0.40 | 0.50       | 0.014     | 0.016 | 0.020      |
| C    | 0.09        | 0.15 | 0.20       | 0.004     | 0.006 | 0.008      |
| D    | 2.80        | 2.90 | 3.00       | 0.110     | 0.114 | 0.118      |
| D1   |             | 1.90 |            |           | 0.075 |            |
| e    |             | 0.95 |            |           | 0.037 |            |
| E    | 2.60        | 2.80 | 3.00       | 0.102     | 0.110 | 0.118      |
| F    | 1.50        | 1.60 | 1.75       | 0.059     | 0.063 | 0.069      |
| L    | 0.10        | 0.35 | 0.60       | 0.004     | 0.014 | 0.024      |
| K    | 0 degrees   |      | 10 degrees | 0 degrees |       | 10 degrees |

### 3.2 SO8 package information

Figure 15. SO8 package outline


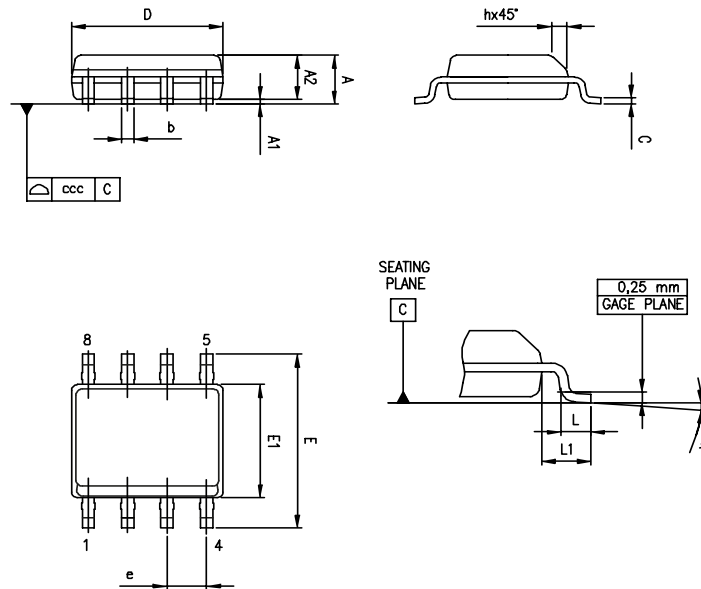


Table 6. SO8 package mechanical data

| Ref. | Dimensions  |      |      |        |       |       |
|------|-------------|------|------|--------|-------|-------|
|      | Millimeters |      |      | Inches |       |       |
|      | Min.        | Typ. | Max. | Min.   | Typ.  | Max.  |
| A    |             |      | 1.75 |        |       | 0.069 |
| A1   | 0.10        |      | 0.25 | 0.004  |       | 0.010 |
| A2   | 1.25        |      |      | 0.049  |       |       |
| b    | 0.28        |      | 0.48 | 0.011  |       | 0.019 |
| c    | 0.17        |      | 0.23 | 0.007  |       | 0.010 |
| D    | 4.80        | 4.90 | 5.00 | 0.189  | 0.193 | 0.197 |
| E    | 5.80        | 6.00 | 6.20 | 0.228  | 0.236 | 0.244 |
| E1   | 3.80        | 3.90 | 4.00 | 0.150  | 0.154 | 0.157 |
| e    |             | 1.27 |      |        | 0.050 |       |
| h    | 0.25        |      | 0.50 | 0.010  |       | 0.020 |
| L    | 0.40        |      | 1.27 | 0.016  |       | 0.050 |
| L1   |             | 1.04 |      |        | 0.040 |       |
| k    | 0°          |      | 8°   | 0°     |       | 8°    |
| ccc  |             |      | 0.10 |        |       | 0.004 |

### 3.3 TSSOP8 package information

**Figure 16. TSSOP8 package outline**

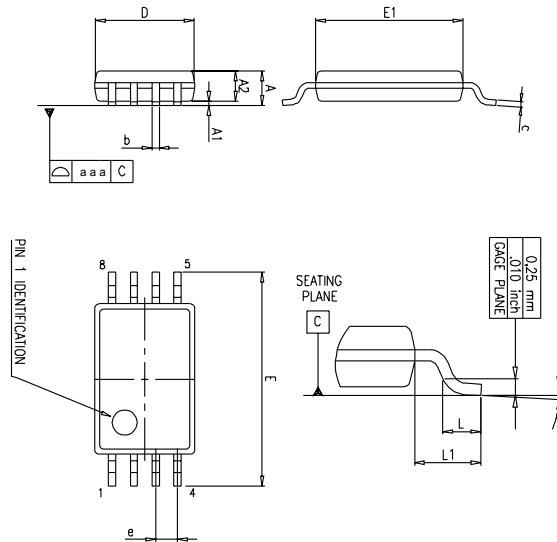

**Table 7. TSSOP8 package mechanical data**

| Ref. | Dimensions  |      |      |        |        |       |
|------|-------------|------|------|--------|--------|-------|
|      | Millimeters |      |      | Inches |        |       |
|      | Min.        | Typ. | Max. | Min.   | Typ.   | Max.  |
| A    |             |      | 1.20 |        |        | 0.047 |
| A1   | 0.05        |      | 0.15 | 0.002  |        | 0.006 |
| A2   | 0.80        | 1.00 | 1.05 | 0.031  | 0.039  | 0.041 |
| b    | 0.19        |      | 0.30 | 0.007  |        | 0.012 |
| c    | 0.09        |      | 0.20 | 0.004  |        | 0.008 |
| D    | 2.90        | 3.00 | 3.10 | 0.114  | 0.118  | 0.122 |
| E    | 6.20        | 6.40 | 6.60 | 0.244  | 0.252  | 0.260 |
| E1   | 4.30        | 4.40 | 4.50 | 0.169  | 0.173  | 0.177 |
| e    |             | 0.65 |      |        | 0.0256 |       |
| k    | 0°          |      | 8°   | 0°     |        | 8°    |
| L    | 0.45        | 0.60 | 0.75 | 0.018  | 0.024  | 0.030 |
| L1   |             | 1    |      |        | 0.039  |       |
| aaa  |             |      | 0.10 |        |        | 0.004 |

### 3.4 SO14 package information

Figure 17. SO14 package outline

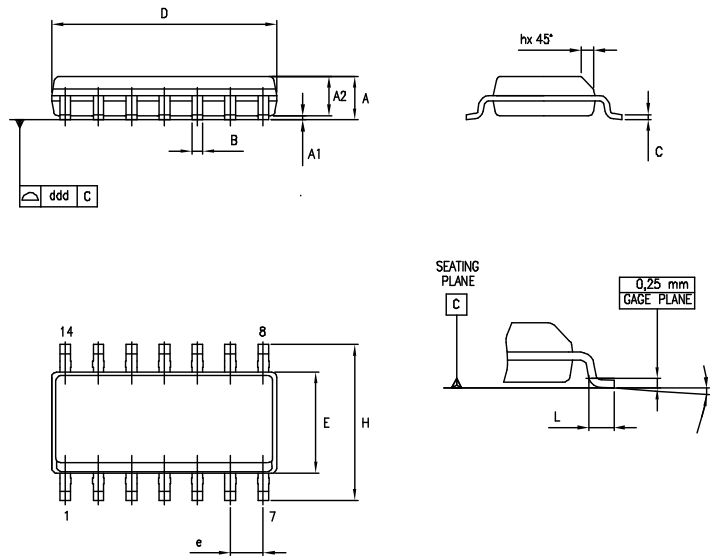


Table 8. SO14 package mechanical data

| Ref. | Dimensions  |      |      |        |      |       |
|------|-------------|------|------|--------|------|-------|
|      | Millimeters |      |      | Inches |      |       |
|      | Min.        | Typ. | Max. | Min.   | Typ. | Max.  |
|      |             |      | 1.75 |        |      | 0.069 |
| A    | 1.35        |      | 1.75 | 0.05   |      | 0.068 |
| A1   | 0.10        |      | 0.25 | 0.004  |      | 0.009 |
| A2   | 1.10        |      | 1.65 | 0.04   |      | 0.06  |
| B    | 0.33        |      | 0.51 | 0.01   |      | 0.02  |
| C    | 0.19        |      | 0.25 | 0.007  |      | 0.009 |
| D    | 8.55        |      | 8.75 | 0.33   |      | 0.34  |
| E    | 3.80        |      | 4.0  | 0.15   |      | 0.15  |
| e    |             | 1.27 |      |        | 0.05 |       |
| H    | 5.80        |      | 6.20 | 0.22   |      | 0.24  |
| h    | 0.25        |      | 0.50 | 0.009  |      | 0.02  |
| L    | 0.40        |      | 1.27 | 0.015  |      | 0.05  |
| k    | 8° (max.)   |      |      |        |      |       |
| ddd  |             |      | 0.10 |        |      | 0.004 |

### 3.5 TSSOP14 package information

Figure 18. TSSOP14 package outline

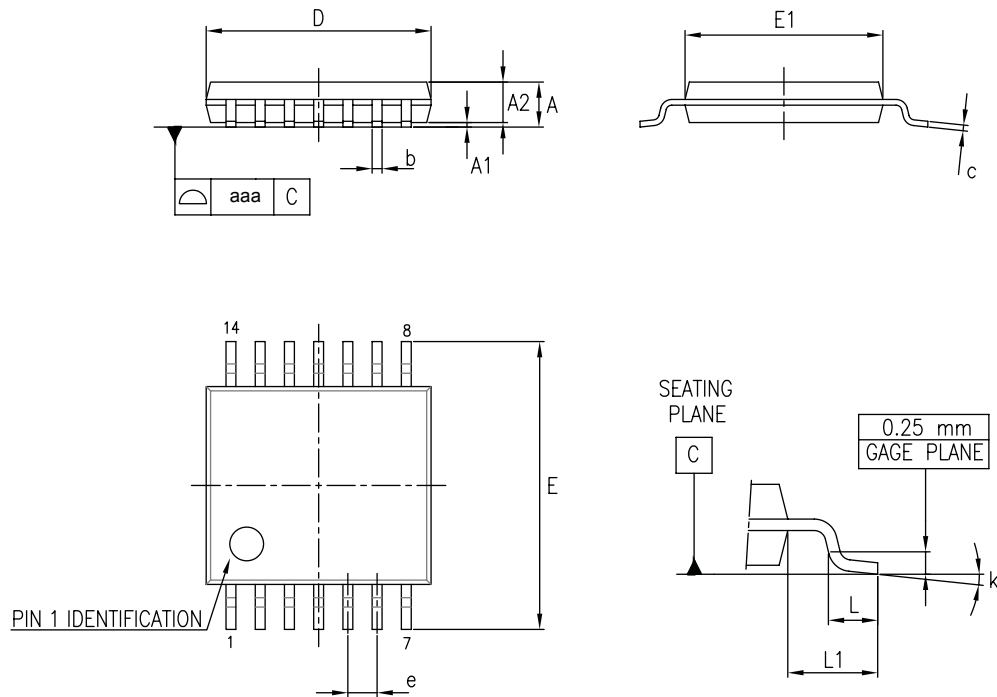


Table 9. TSSOP14 package mechanical data

| Ref. | Dimensions  |      |      |        |        |        |
|------|-------------|------|------|--------|--------|--------|
|      | Millimeters |      |      | Inches |        |        |
|      | Min.        | Typ. | Max. | Min.   | Typ.   | Max.   |
| A    |             |      | 1.20 |        |        | 0.047  |
| A1   | 0.05        |      | 0.15 | 0.002  | 0.004  | 0.006  |
| A2   | 0.80        | 1.00 | 1.05 | 0.031  | 0.039  | 0.041  |
| b    | 0.19        |      | 0.30 | 0.007  |        | 0.012  |
| c    | 0.09        |      | 0.20 | 0.004  |        | 0.0089 |
| D    | 4.90        | 5.00 | 5.10 | 0.193  | 0.197  | 0.201  |
| E    | 6.20        | 6.40 | 6.60 | 0.244  | 0.252  | 0.260  |
| E1   | 4.30        | 4.40 | 4.50 | 0.169  | 0.173  | 0.176  |
| e    |             | 0.65 |      |        | 0.0256 |        |
| L    | 0.45        | 0.60 | 0.75 | 0.018  | 0.024  | 0.030  |
| L1   |             | 1.00 |      |        | 0.039  |        |
| k    | 0°          |      | 8°   | 0°     |        | 8°     |
| aaa  |             |      | 0.10 |        |        | 0.004  |

## 4 Ordering information

**Table 10. Order codes**

| Order code                 | Temperature range | Package                    | Packaging     | Marking  |
|----------------------------|-------------------|----------------------------|---------------|----------|
| LMV321ILT                  | -40 °C to 125 °C  | SOT23-5                    | Tape and reel | K177     |
| LMV321RILT                 |                   |                            |               | K176     |
| LMV321IYLT <sup>(1)</sup>  |                   | SOT23-5 (automotive grade) |               | K180     |
| LMV321RIYLT <sup>(1)</sup> |                   |                            |               | K185     |
| LMV358IDT                  |                   | SO8                        |               | LMV358   |
| LMV358IYDT <sup>(1)</sup>  |                   | SO8 (automotive grade)     |               | LMV358IY |
| LMV358IPT                  |                   | TSSOP8                     |               | MV358    |
| LMV358IYPT <sup>(1)</sup>  |                   | TSSOP8 (automotive grade)  |               | K181Y    |
| LMV324IDT                  |                   | SO14                       |               | LMV324   |
| LMV324IYDT <sup>(1)</sup>  |                   | SO14 (automotive grade)    |               | V324Y    |
| LMV324IPT                  |                   | TSSOP14                    |               | MV324    |
| LMV324IYPT <sup>(1)</sup>  |                   | TSSOP14 (automotive grade) |               | V324IY   |

1. Qualified and characterized according to AEC Q100 and Q003 or equivalent, advanced screening according to AEC Q001 and Q 002 or equivalent.



## Revision history

**Table 11. Document revision history**

| Date        | Revision | Changes  |
|-------------|----------|--|
| 1-Dec-2005  | 1        | First release - Products in full production.   |
| 25-May-2007 | 2        | Added automotive grade part numbers to order codes table. Moved order codes table to Section 4: "Ordering information".  |
| 20-Feb-2008 | 3        | Added Figure 12: "Noise versus frequency".<br>Updated presentation of package information.<br>Corrected footnote for automotive grade part numbers in order codes table.   |
| 18-Jan-2010 | 4        | Updated document format.<br>Updated packages in Section 3: "Package information".<br>Modified Note 1 and added Note 2 under Table 10: "Order codes".   |
| 05-Nov-2012 | 5        | Updated Features (added SO8, TSSOP8, SO14, and TSSOP14 package).<br>Updated titles of Figure 2 to Figure 11 (added conditions).<br>Updated LMV321RIYLT order code in Table 10: "Order codes" (status qualified), removed LMV358IYD and LMV324IYD order codes from Table 10: "Order codes".<br>Minor corrections throughout document. |
| 16-Aug-2013 | 6        | Updated Features<br>Added Related products<br>Table 3 and Table 4: replaced $\Delta V_{iO}$ with $\Delta V_{iO}/\Delta T$<br>Table 6: updated minimum inches "k" value (0 instead of 1)<br>Table 10: "Order codes": updated footnote associated with order code LMV358IYPT   |
| 05-Jun-2015 | 7        | Updated Figure 11.<br>TSSOP package information: updated "aaa" value<br>Table 10: "Order codes": removed obsolete order codes LMV358ID and LMV324ID.   |
| 15-Oct-2015 | 8        | Replaced Figure 12: "Noise versus frequency".  |
| 06-May-2019 | 9        | Added <a href="#">Figure 13. LMV358IYPT Input offset voltage vs. temperature at 5 V supply voltage.</a>  |

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, please refer to [www.st.com/trademarks](http://www.st.com/trademarks). All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2019 STMicroelectronics – All rights reserved

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## STMicroelectronics:

[LMV321ILT](#) [LMV321RILT](#) [LMV324IDT](#) [LMV324IPT](#) [LMV358IDT](#) [LMV358IPT](#) [LMV321RIYLT](#) [LMV321IYLT](#)  
[LMV324IYDT](#) [LMV358IYDT](#) [LMV324IYPT](#) [LMV358IYPT](#)