


L2N7002LT1G


S-L2N7002LT1G

Small Signal MOSFET
115 mAmps, 60 Volts N-Channel SOT-23



1. FEATURES

- We declare that the material of product compliance with RoHS requirements and Halogen Free.
- S- prefix for automotive and other applications requiring unique site and control change requirements; AEC-Q101 qualified and PPAP capable.
- ESD Protected:1000V



2. DEVICE MARKING AND ORDERING INFORMATION

Device	Marking	Shipping
L2N7002LT1G	702	3000/Tape&Reel
L2N7002LT3G	702	10000/Tape&Reel

3. MAXIMUM RATINGS(Ta = 25°C)

Parameter	Symbol	Limits	Unit
Drain-Source Voltage	VDSS	60	V
Drain-Gate Voltage (RGS = 1.0 MΩ)	VDGR	60	V
Drain Current			
– Continuous TC = 25°C	ID	115	mA
TC = 100°C		75	
– Pulsed (Note 1)	IDM	800	
Gate-Source Voltage			
– Continuous	VGS	±20	V
– Non-repetitive (tp ≤ 50μs)	VGSM	±40	V

4. THERMAL CHARACTERISTICS

Parameter	Symbol	Limits	Unit
Total Device Dissipation, FR-5 Board (Note 2) @ TA = 25°C	PD	225	mW
Derate above 25°C		1.8	mW/°C
Thermal Resistance, Junction-to-Ambient(Note 2)	RθJA	556	°C/W
Junction and Storage temperature	TJ, Tstg	-55~+150	°C

1. Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.





2. FR-5 = 1.0×0.75×0.062 in.

5. ELECTRICAL CHARACTERISTICS (Ta= 25°C)





Characteristic	Symbol	Min.	Typ.	Max.	Unit
Static					
Drain–Source Breakdown Voltage (VGS = 0, ID = 10μA)	VBRDSS	60	-	-	V
Zero Gate Voltage Drain Current TJ = 25°C (VGS = 0, VDS = 60 V) TJ = 125°C	IDSS	-	-	1.0	μA
		-	-	500	
Gate–Body Leakage Current, Forward (VGS = 20 V)	IGSSF	-	-	1.0	μA
Gate–Body Leakage Current, Reverse (VGS = - 20 V)	IGSSR	-	-	-1.0	μA
Gate Threshold Voltage (VDS = VGS, ID = 250μA)	VGS(th)	1.0	1.6	2.0	V
On–State Drain Current (VDS ≥ 2.0 VDS(on), VGS = 10 V)	ID(on)	500	-	-	mA
Static Drain–Source On–State Voltage (VGS = 10 V, ID = 500 mA) (VGS = 5.0 V, ID = 50 mA)	VDS(on)	-	-	3.75	V
		-	-	0.375	
Static Drain–Source On–State Resistance (VGS = 10 V, ID = 500 mA) TC = 25°C TC = 125°C (VGS = 5.0 V, ID = 50 mA) TC = 25°C TC = 125°C	RDS(on)	-	-	7.5	Ohms
		-	-	13.5	
		-	-	7.5	
		-	-	13.5	
Forward Transconductance (VDS ≥ 2.0 VDS(on), ID = 200 mA)	gfs	80	-	-	mmhos
Dynamic					
Input Capacitance (VDS = 25 V, VGS = 0, f = 1.0 MHz)	Ciss	-	17	50	pF
Output Capacitance (VDS = 25 V, VGS = 0, f = 1.0 MHz)	Coss	-	10	25	pF
Reverse Transfer Capacitance (VDS = 25 V, VGS = 0, f = 1.0 MHz)	Crss	-	2.5	5.0	pF
Turn-On Delay Time	(VDD = 25 V, ID = 500 mA, RG = 25Ω, RL = 50 Ω, Vgen = 10 V)	td(on)	-	7	ns
Turn-Off Delay Time		td(off)	-	11	
Diode Forward On–Voltage (IS = 115 mA, VGS = 0 V)	VSD	-	-	1.5	V
Source Current Continuous (Body Diode)	IS	-	-	115	mA
Source Current Pulsed	ISM	-	-	800	mA

3. Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.


6. ELECTRICAL CHARACTERISTICS CURVES

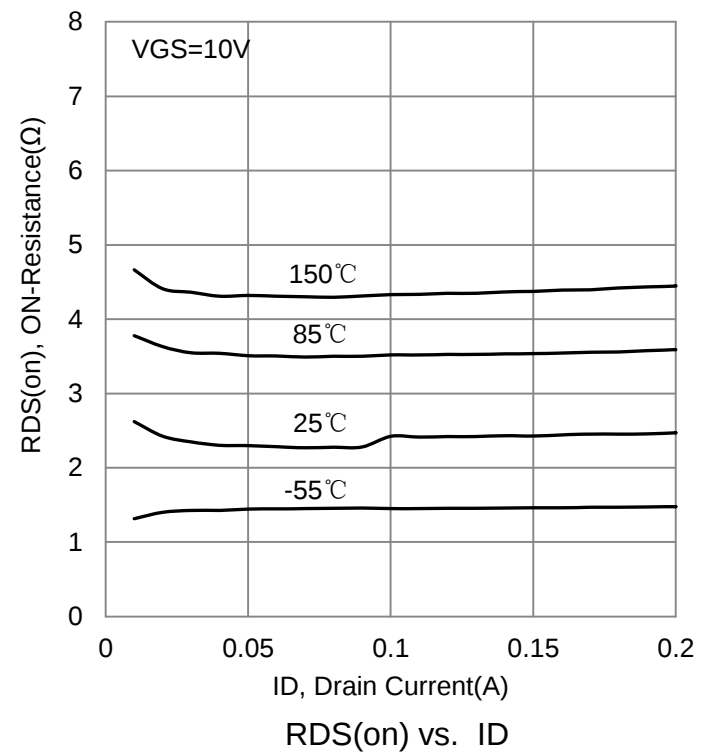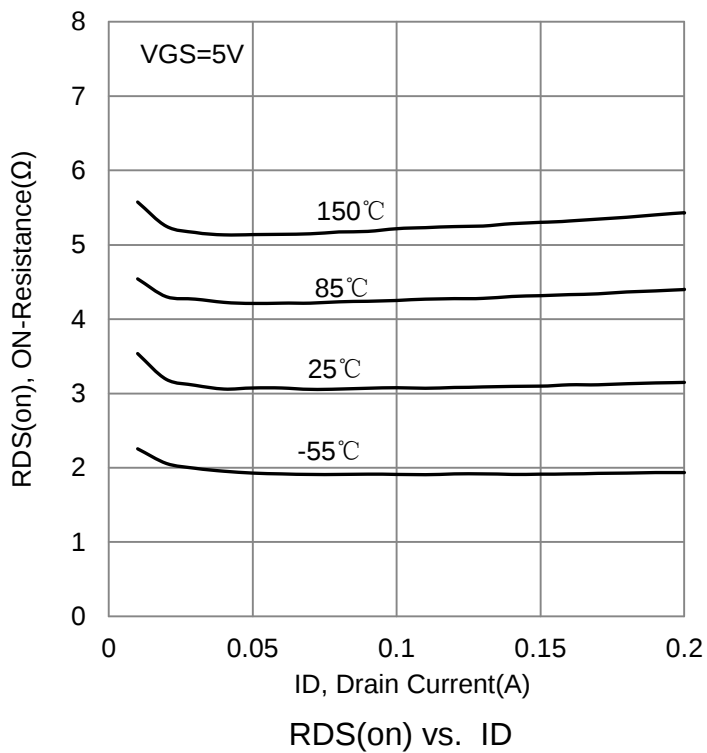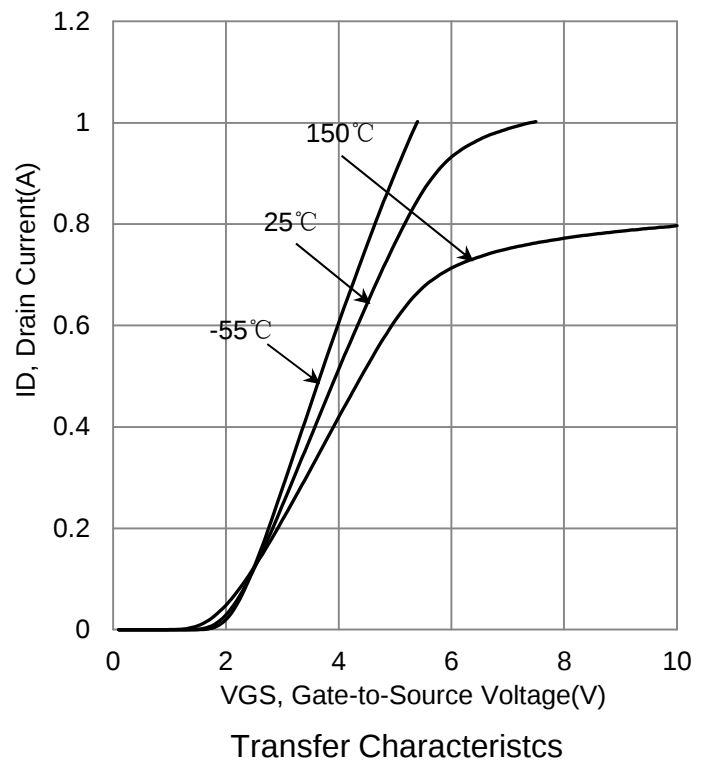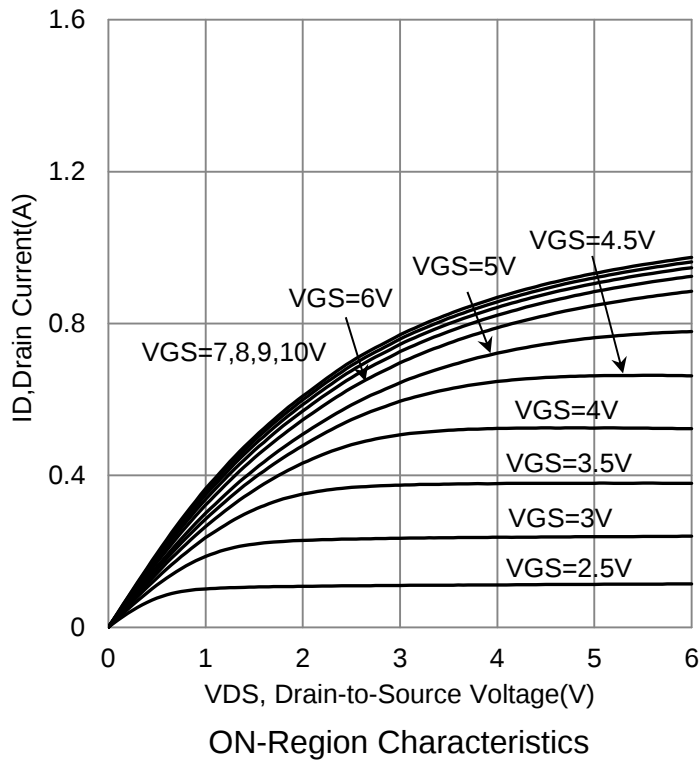


6. ELECTRICAL CHARACTERISTICS CURVES (Con.)

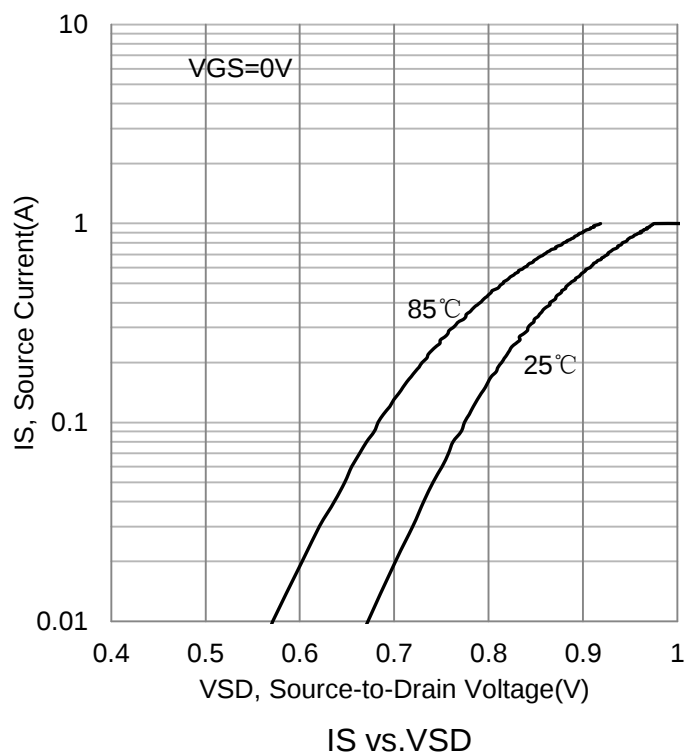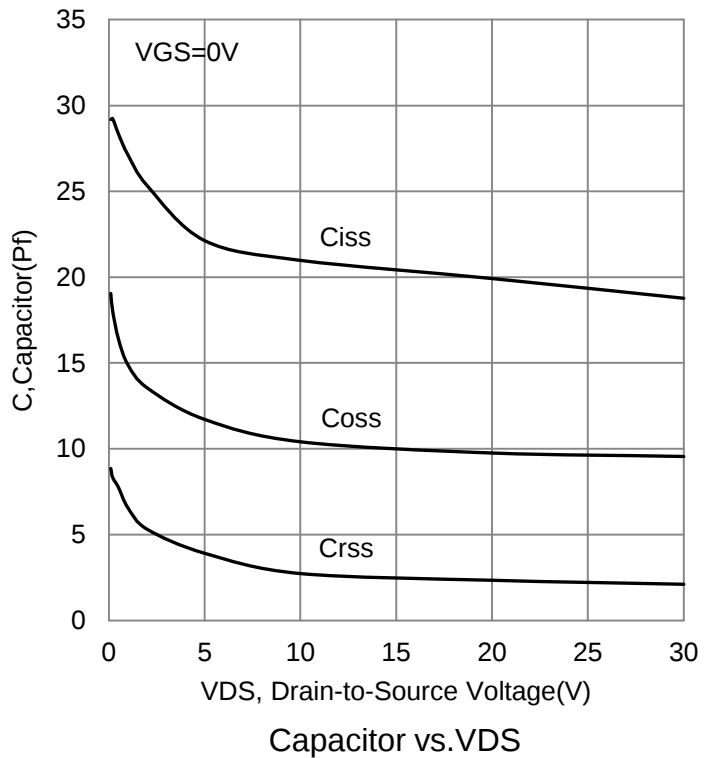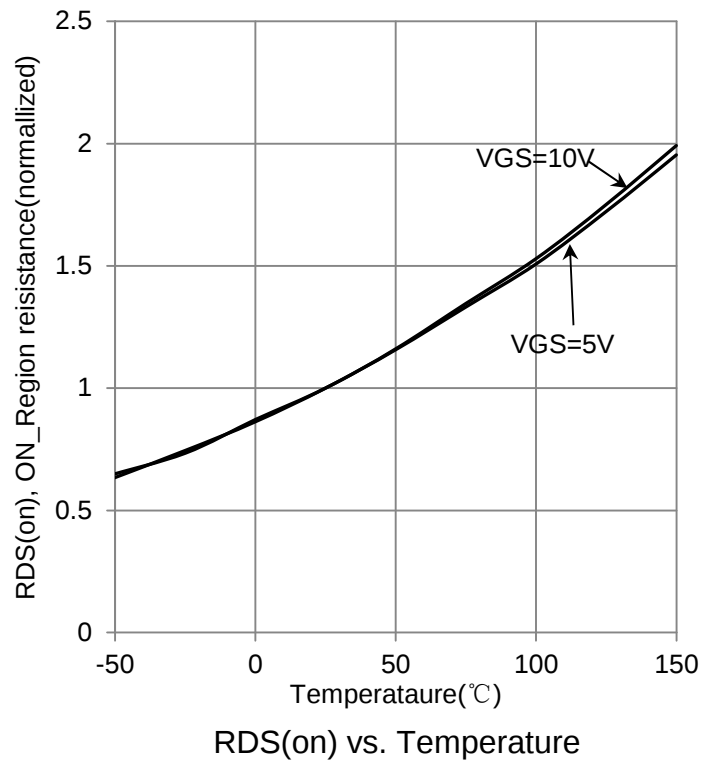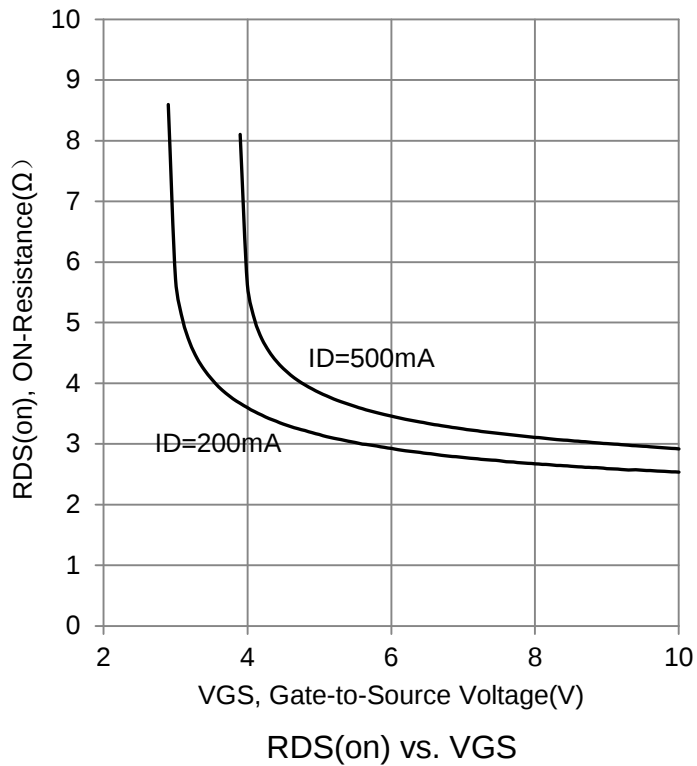

6. ELECTRICAL CHARACTERISTICS CURVES (Con.)


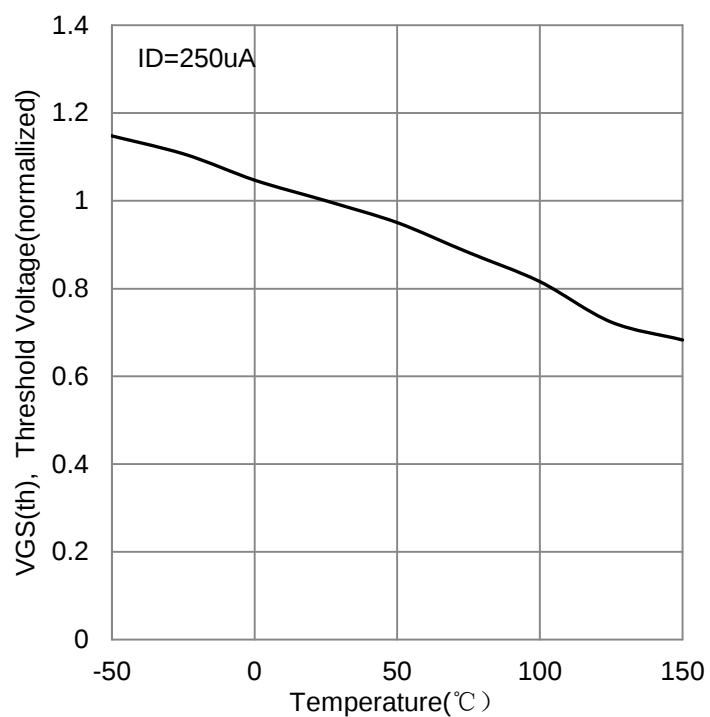


$V_{GS(th)}$ vs. Temperature


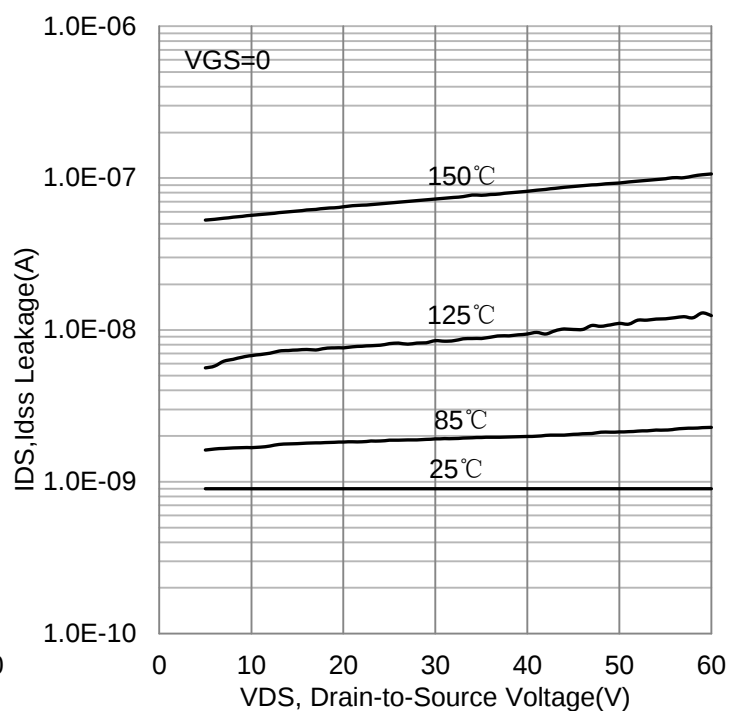


I_{DS} vs. V_{DS}

7.OUTLINE AND DIMENSIONS

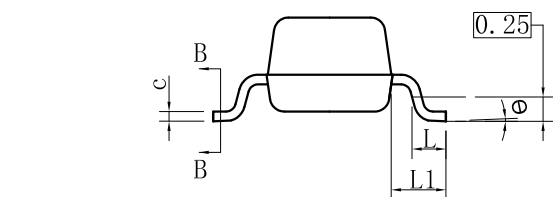

SECTION B-B

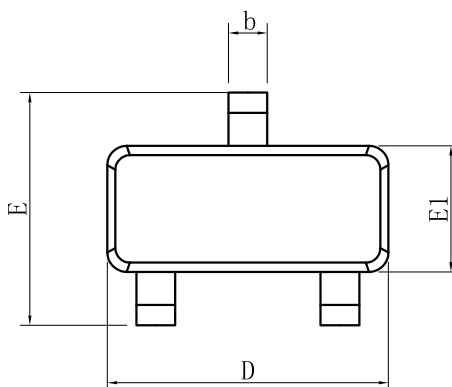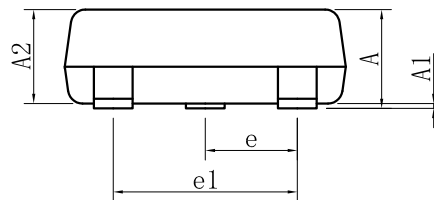


SOT23			
DIM	MIN	NOR	MAX
A	0.89	—	1.12
A1	0.01	—	0.10
A2	0.88	0.95	1.02
b	0.30	—	0.50
b1	0.30	0.40	0.45
c	0.08	—	0.20
c1	0.08	0.10	0.16
D	2.80	2.90	3.04
E	2.10	—	2.64
E1	1.20	1.30	1.40
e	0.95BSC		
e1	1.90BSC		
L	0.40	0.46	0.60
L1	0.54REF		
θ	0°	—	8°
All Dimensions in mm			

GENERAL NOTES

- 1.Top package surface finish $Ra0.4\pm0.2\mu m$
- 2.Bottom package surface finish $Ra0.7\pm0.2\mu m$
- 3.Side package surface finish $Ra0.4\pm0.2\mu m$

8.SOLDERING FOOTPRINT

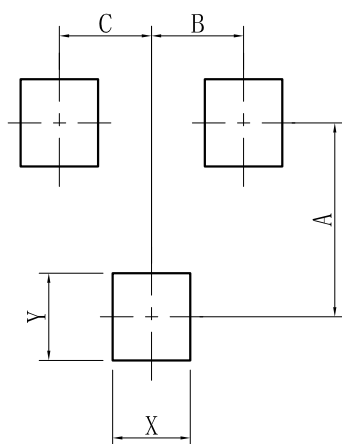

SOT-23	
DIM	(mm)
X	0.80
Y	0.90
A	2.00
B	0.95
C	0.95

DISCLAIMER

- Curve guarantee in the specification. The curve of test items with electric parameter is used as quality guarantee. The curve of test items without electric parameter is used as reference only.
- Before you use our Products for new Project, you are requested to carefully read this document and fully understand its contents. LRC shall not be in any way responsible or liable for failure, malfunction or accident arising from the use of any LRC's Products against warning, caution or note contained in this document.
- All information contained in this document is current as of the issuing date and subject to change without any prior notice. Before purchasing or using LRC's Products, please confirm the latest information with a LRC sales representative.