

NEC
 μ PD547

NEC Microcomputers, Inc.

μ COM-44 SINGLE CHIP MICROCOMPUTER

DESCRIPTION

The μ PD547 is the standard version of the μ COM-44. This PMOS, -10 volt part is designed to have TTL-level compatible inputs and is easily interfaced to external static RAM. As a μ COM-44, it includes 1000 x 8 ROM, 64 x 4 RAM and 35 I/O lines in a 42 pin plastic dual-in-line package.

ABSOLUTE MAXIMUM RATINGS*

Operating Temperature	-10°C to +70°C
Storage Temperature	-40°C to +125°C
Supply Voltage	-15 to +0.3 Volts
Input Voltages	-15 to +0.3 Volts
Output Voltages	-15 to +0.3 Volts
Output Current	-4 mA

COMMENT: Stress above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

* $T_a = 25^\circ\text{C}$

DC/AC CHARACTERISTICS

$T_a = -10^\circ\text{C} \text{ to } +70^\circ\text{C}$, $V_{GG} = -10V \pm 10\%$

PARAMETER	SYMBOL	LIMITS			UNIT	TEST CONDITIONS
		MIN	TYP	MAX		
Input High Voltage	V_{IH}	0		-2.0	V	Ports A to D, \bar{INT} , RES
Input Low Voltage	V_{IL}	-4.3	V_{GG}	V	V	Ports A to D, \bar{INT} , RES
Input Leakage Current High	I_{LH}			+10	μA	Ports A and B, \bar{INT} , RES, TEST $V_I = -1V$
Input Leakage Current Low	I_{LIL}			-10	μA	Ports A and B, \bar{INT} , RES, TEST $V_I = -11V$
I/O Leakage Current High	I_{IOH}			+10	μA	Ports C and D $V_I = -1V$
I/O Leakage Current Low	I_{IOL}			-10	μA	Ports C and D $V_I = -11V$
Output Voltage	V_{OH1}			-1.0	V	Ports C to I $I_{OH} = -1.0 \text{ mA}$
	V_{OH2}			-2.3	V	Ports C to I $I_{OH} = -3.3 \text{ mA}$
Output Leakage Current	I_{OL}			-10	μA	Ports C to I $V_O = -1V$
Supply Current	I_{GG}		-30	-50	mA	
Oscillator Frequency	F	150		440	KHz	


μ PD547

$T_a = 25^\circ C$, $f = 1 \text{ MHz}$


CAPACITANCE

PARAMETER	SYMBOL	LIMITS			UNIT	TEST CONDITIONS
		MIN	TYP	MAX		
Input Capacitance	C_I			15	pf	
Output Capacitance	C_O			15	pf	
Input/Output Capacitance	C_{IO}			15	pf	$f = 1 \text{ MHz}$

CLOCK WAVEFORM

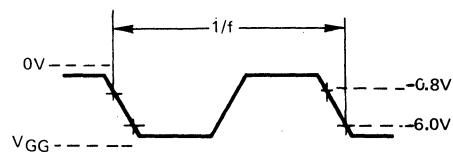

PACKAGE OUTLINE μ PD547C

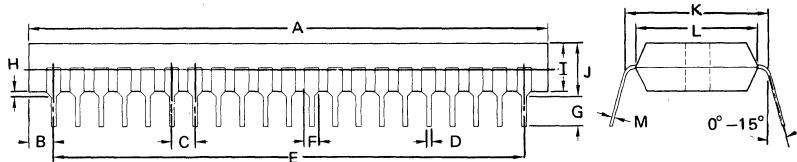

ITEM	MILLIMETERS	INCHES
A	56.0 MAX	2.2 MAX
B	2.6 MAX	0.1 MAX
C	2.54	0.1
D	0.5 ± 0.1	0.02 ± 0.004
E	50.8	2.0
F	1.5	0.059
G	3.2 MIN	0.126 MIN
H	0.5 MIN	0.02 MIN
I	5.22 MAX	0.20 MAX
J	5.72 MAX	0.22 MAX
K	15.24	0.6
L	13.2	0.52
M	0.3 ± 0.1	0.01 ± 0.004