




Part Number : [901301118](#)

Product Description : C-Grid III Header, Dual Row, Vertical, Shrouded, Fully Loaded, 18 Circuits, Black, 3µm Tin (Sn) over Nickel (Ni)

Series Number : 90130

Status : Active

Product Category : PCB Headers and Receptacles

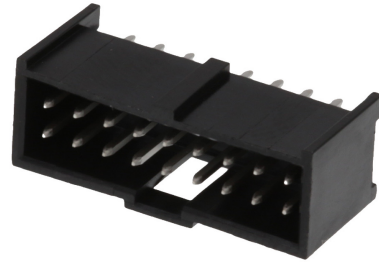

---

## Documents & Resources

### Drawings

[901301118\\_sd.pdf](#)

[PK-91814-005-001.pdf](#)

### 3D Models and Design Files

[901301118\\_stp.zip](#)

### Specifications

[901190001-AS-000.pdf](#)


[PK-90130-001-001.pdf](#)

[PS-99020-0001-001.pdf](#)

---

## Product Environment Compliance

### Compliance

GADSL/IMDS	Compliant with Exemption 44; 33
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Not Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2024)6225-DC (07 Nov 2024)
EU RoHS	Compliant per EU 2015/863

### Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

## Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

## EU RoHS Certificate of Compliance

---

### Part Details

#### General

Status	Active
Category	PCB Headers and Receptacles
Series	90130
Description	C-Grid III Header, Dual Row, Vertical, Shrouded, Fully Loaded, 18 Circuits, Black, 3µm Tin (Sn) over Nickel (Ni)
Application	Signal, Wire-to-Board
Component Type	PCB Header
Product Name	C-Grid III
UPC	800753700079

#### Agency

CSA	LR19980
UL	E29179

#### Electrical

Current - Maximum per Contact	3.0A
Voltage - Maximum	350V AC/DC

#### Physical

Breakaway	No
Circuits (Loaded)	18
Circuits (maximum)	18
Color - Resin	Black
Durability (mating cycles max)	30
First Mate / Last Break	No

Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	Polyester
Net Weight	2.086/g
Number of Rows	2
Orientation	Vertical
Packaging Type	Tray
PC Tail Length	2.90mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.60mm
Pitch - Mating Interface	2.54mm
Pitch - Termination Interface	2.54mm
Plating min - Mating	3.048µm
Plating min - Termination	3.048µm
Polarized to Mating Part	Yes
Polarized to PCB	No
Shrouded	Closed Ends
Stackable	No
Temperature Range - Operating	-55° to +125°C
Termination Interface Style	Through Hole

### Solder Process Data

Max-Duration	3
Lead-Free Process Capability	WAVE
Max-Cycle	1
Max-Temp	235

---

## Mates With / Use With

### Mates with Part(s)

Description	Part Number
C-Grid III Dual Row Crimp Housings	<u>90142</u>
C-Grid III Modular Dual Row Crimp Housings	<u>90143</u>

---

This document was generated on Feb 01, 2025