



Q13MC3062000600

EPSON ELECTRONICS AMERICA

Buy Now



Looking for a discount?

[Check out our current promotions!](#)

Give us a call

1-855-837-4225

International: 1-415-281-3866

Email Us

Sales and New Orders: sales@verical.com

Order Support: support@verical.com

Suppliers: [Visit our seller page](#)

Company Address

Arrow Electronics, Inc
9201 East Dry Creek Road
Centennial, CO 80112

This coversheet was created by Verical, a division of Arrow Electronics, Inc. ("Verical"). The attached document was created by the part supplier, not Verical, and is provided strictly 'as is.' Verical, its subsidiaries, affiliates, employees, and agents make no representations or warranties regarding the attached document and disclaim any liability for the consequences of relying on the information therein. All referenced brands, product names, service names, and trademarks are the property of their respective owners.

EPSON®
EXCEED YOUR VISION



EPSON ELECTRONICS AMERICA

MICRO DEVICES

Click to add text

Product Configuration Guide



CONTENTS

• NEW Crystals PCS Guide.....	Pages 4-6
• Legacy Crystal PCS Guide	Pages 7-31
• Oscillators	Pages 32-66
• TCXO	Pages 70-86
• SAW Oscillators	Pages 87-118
• Programmable Oscillators	Pages 119-134
• Voltage Controlled Oscillators	Pages 135-159
• Sensing Devices.....	Pages 160-164
• RTC	Pages 165-175
• Appendix (Load Cap Codes & Values)	Pages 176-177

Epson's standard product offering is compliant with EU RoHS directive.

Please refer to the 2019 Crystal Master (pp. 157 ~ 160) for a complete list of products that are RoHS compliant (with Pb exemption) and/or Pb Free and its associated terminal materials.

Product Configuration Guide

CRYSTALS



- 32.768kHz Crystals
- Standard kHz Crystals
- MHz Crystals



EPSON

June, 2021

NOTE: Use this updated PCS for all NEW crystal part numbers from May 2016



NEW CRYSTAL MICRO DEVICES

Product Configuration Guide

EPSON

June, 2021

Product Configuration System



32.768 kHz Crystal Unit

FCXXXXXX

①

Model
All kHz models,
FC and MC series

32.768K

②

Frequency

—

90NN50KD5

③

④

⑤

⑥

⑦

⑧

Tape & Reel

Drive level

ESR unit (K = kΩ)

ESR

Frequency tolerance

Load capacitance

①	②	③	④	⑤	⑥	⑦	⑧
Model	Frequency	Load Cap	Frequency Tolerance	ESR	ESR Unit	Drive level	Tape & Reel
FCXXXXXX	32.768kHz	C5 = 12.5 pF 90 = 9.0 pF 70 = 7.0 pF	NN = +/- 20 ppm AA = +/- 10 ppm	A5 = 150 kΩ 90 = 90 kΩ 70 = 70 kΩ 60 = 60 kΩ 50 = 50 kΩ	K = kΩ	A = 0.1 μW B = .25 μW C = 0.5 μW D = 1.0 μW	B = Bulk 3 = 250pcs/reel 0 = 1000pcs/reel 5 = 3000pcs/reel 7=5000pc/reel

EPSON

November, 2021

NOTES:


The values listed above are common/standard values for kHz crystals; some combinations are not possible depending the specific model. Please contact you EEA representative for assistance to verify the part configuration or inquire about a certain value that is not listed above.

Product Configuration System



MHz Range Crystal Units

FAXXXXXX 38.40M – 60NNYYBA0RE5

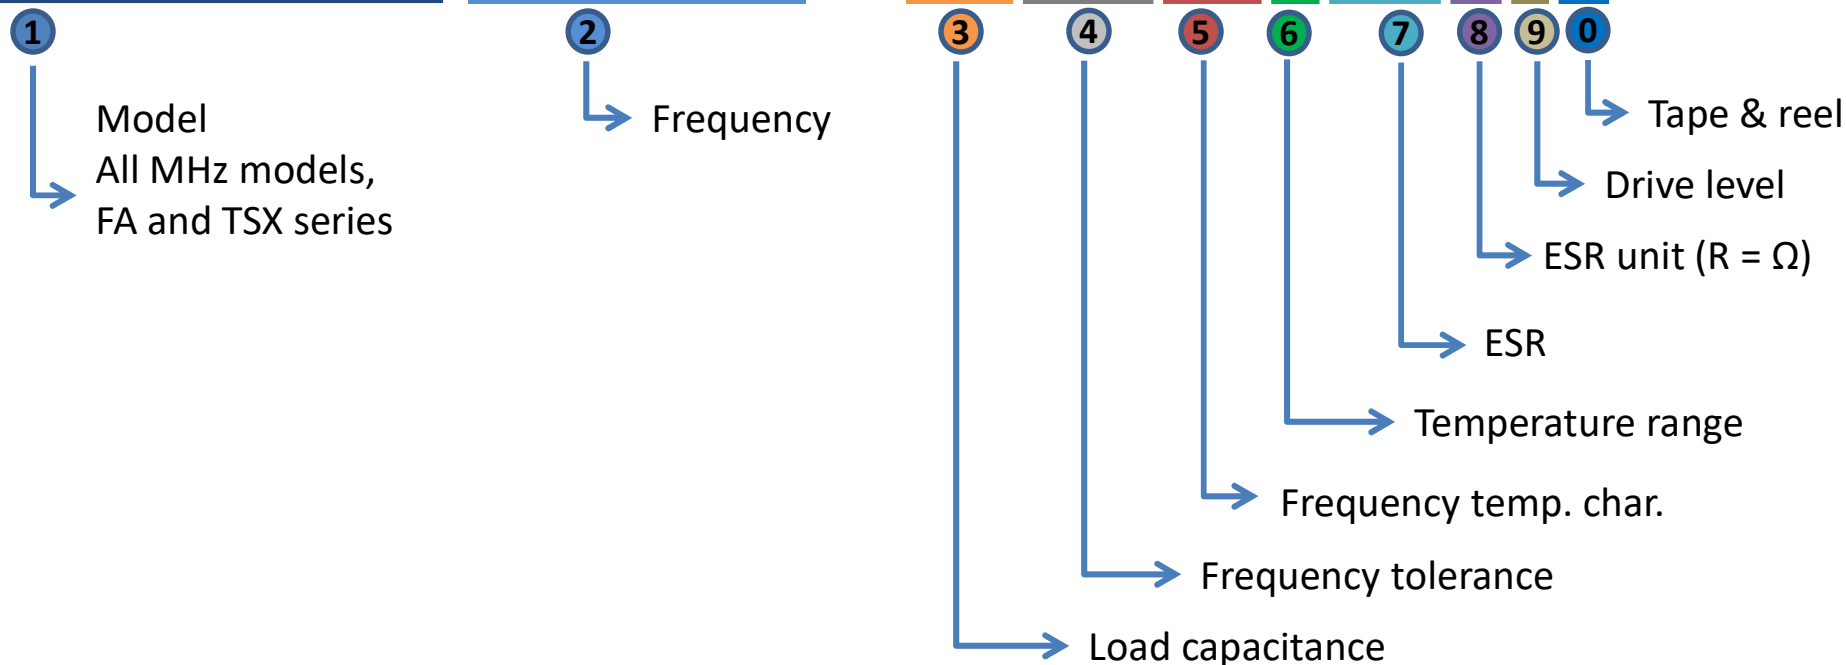

1 Model	3 Load cap	4 Frequency tolerance	5 Freq. temp. char.	6 Temp. range	7 8 ESR = Ω	9 Drive level	0 Tape & reel
FAXXXXXX	J0 = 18 pF	bb = +/-50 ppm	bb = +/-50 ppm	U = -20 to +75C	B0 = 200 Ω	E = 100 μ W	B = Bulk
	C5 = 12.5 pF	NN = +/-20 ppm	NN = +/-20 ppm	N = -30 to +85C	A0 = 100 Ω	G = 200 μ W	3 = 250pcs/reel
2 Frequency	A0 = 10 pF	FF = +/-15 ppm	FF = +/-15 ppm	G = -40 to +85C	80 = 80 Ω		0 = 1000pcs/reel
12 ~ 60 MHz	90 = 9.0 pF	AA = +/- 10 ppm	AA = +/- 10 ppm	H = -40 to 105C	60 = 60 Ω		5 = 3000pcs/reel
	70 = 7.0 pF						8 = 6000 pcs/reel

EPSON

June, 2021

NOTES: The values listed above are common/standard values for MHz crystals; some combinations are not possible depending the specific model. Please contact you EEA representative for assistance to verify the part configuration or inquire about a certain value that is not listed above.

NOTE: This PCS applies to crystal part numbers before May 2016



LEGACY CRYSTAL MICRO DEVICES Product Configuration Guide


EPSON

June, 2021

Product Configuration System



kHz Range Crystal Units

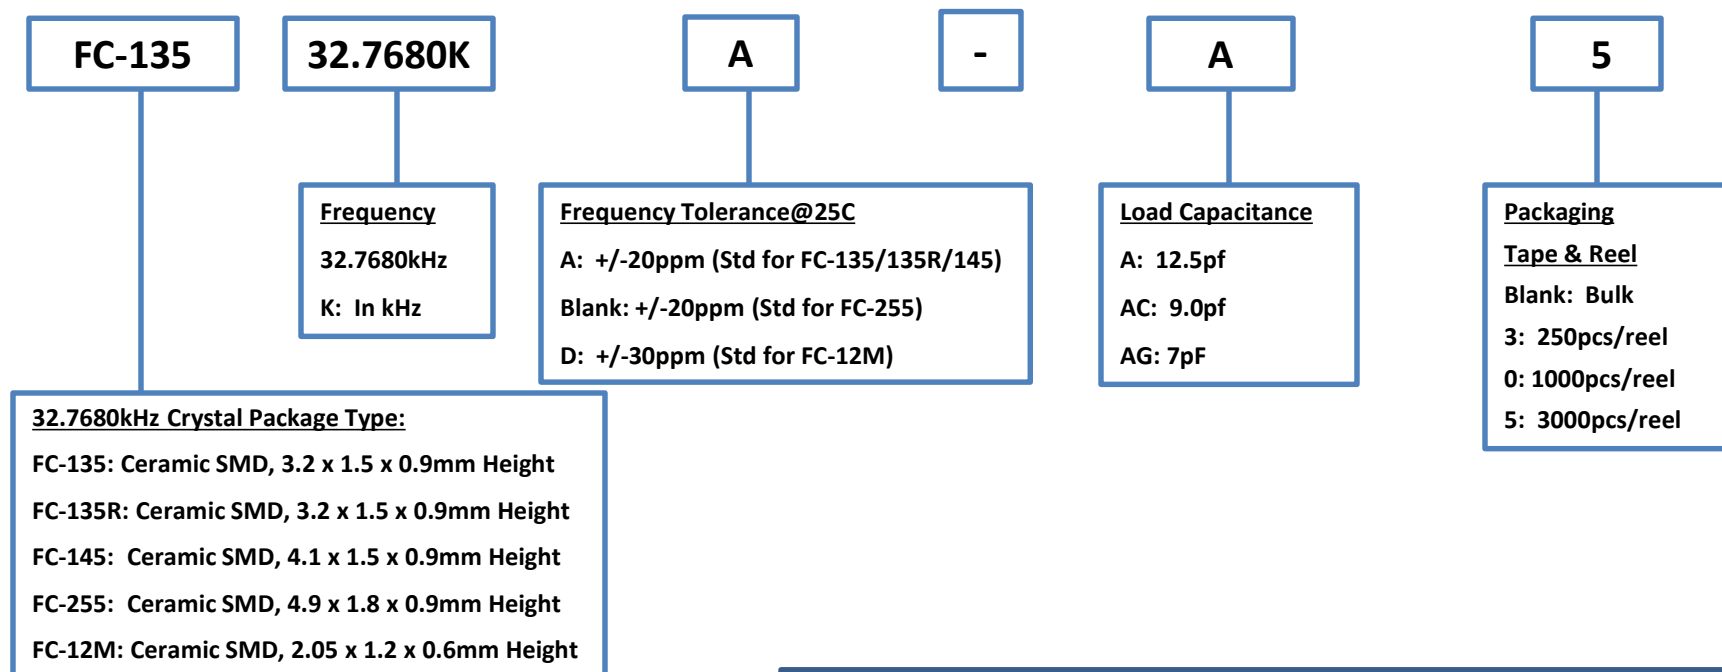

NOTES:

- 1) This product configuration guide is applicable only to 32.7680kHz Crystals. For other frequencies, please reference the Standard kHz Crystal Product Configuration System.
- 2) If you require a load capacitance other than the above listed, please contact your EEA representative for assistance.


EPSON

June, 2021

Product Configuration System



32.768 kHz Crystal Unit with 0.35mm height for Smart Card

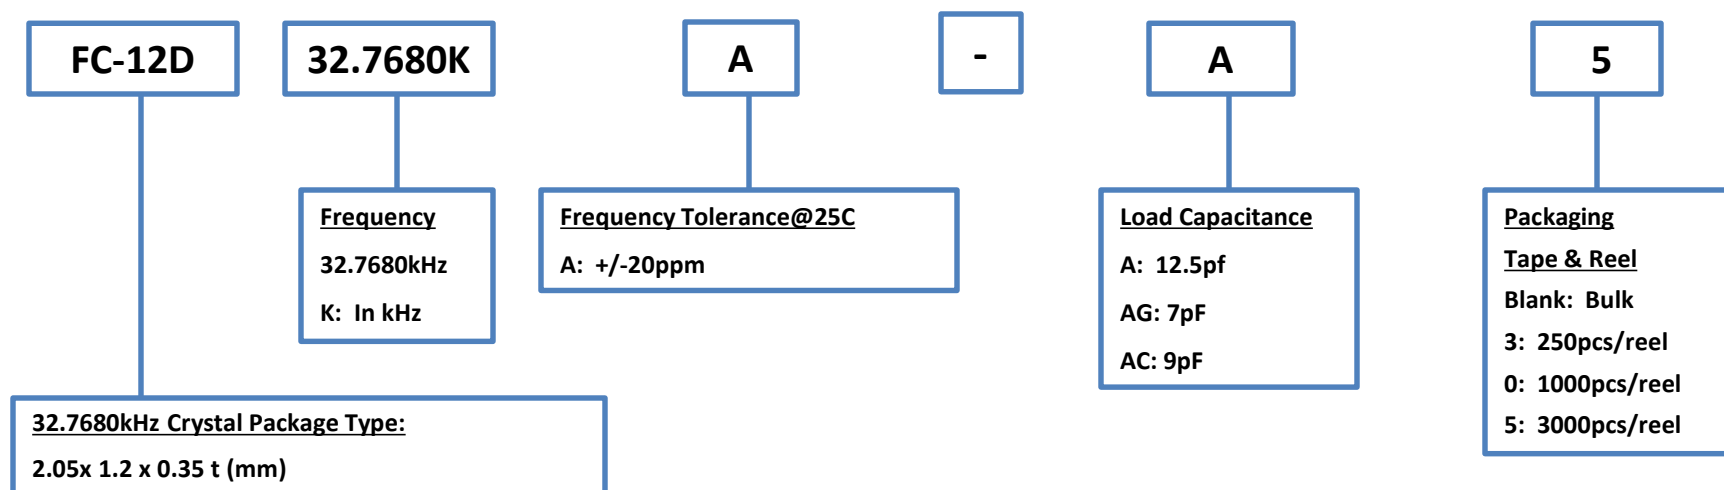

NOTES:

- 1) If your application for this part is not a Smart Card, please contact your EEA representative for assistance.
- 2) If you require a load capacitance other than the above listed, please contact your EEA representative for assistance.


EPSON

June, 2021

Product Configuration System



kHz Range Crystal Units

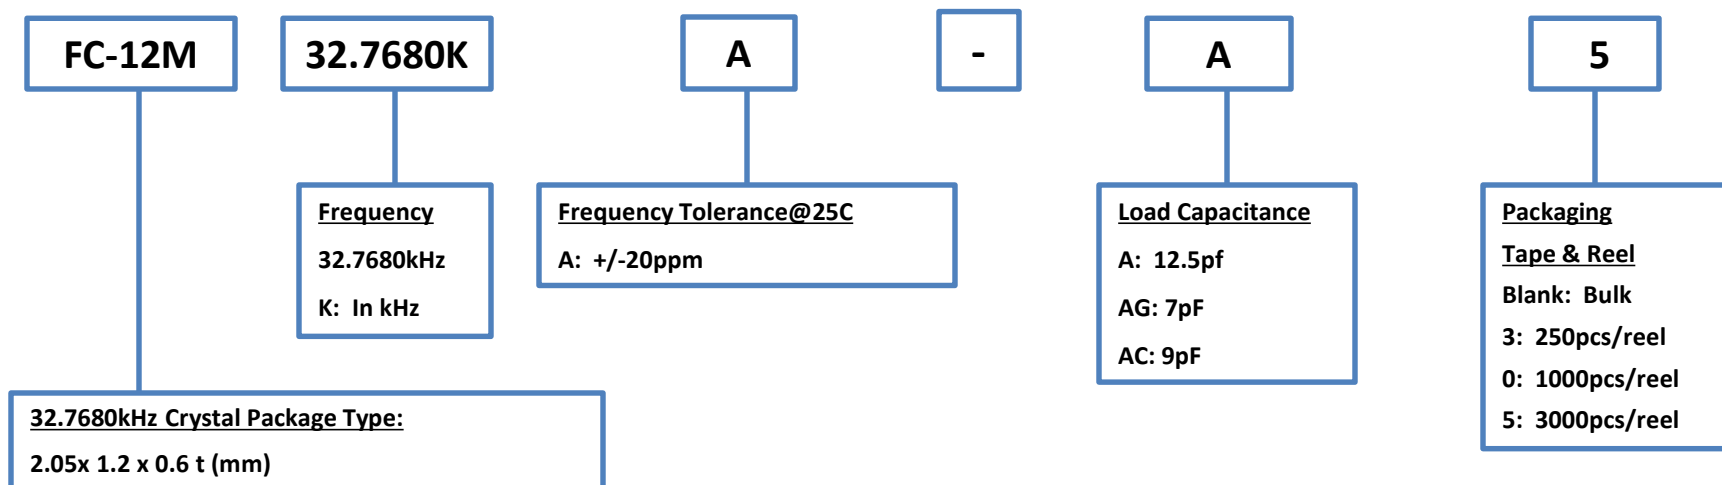

NOTES:

- 1) If you require a frequency or tolerance other than the above listed, please contact your EEA representative for assistance.


EPSON

June, 2021

Product Configuration System



kHz Range Crystal Units

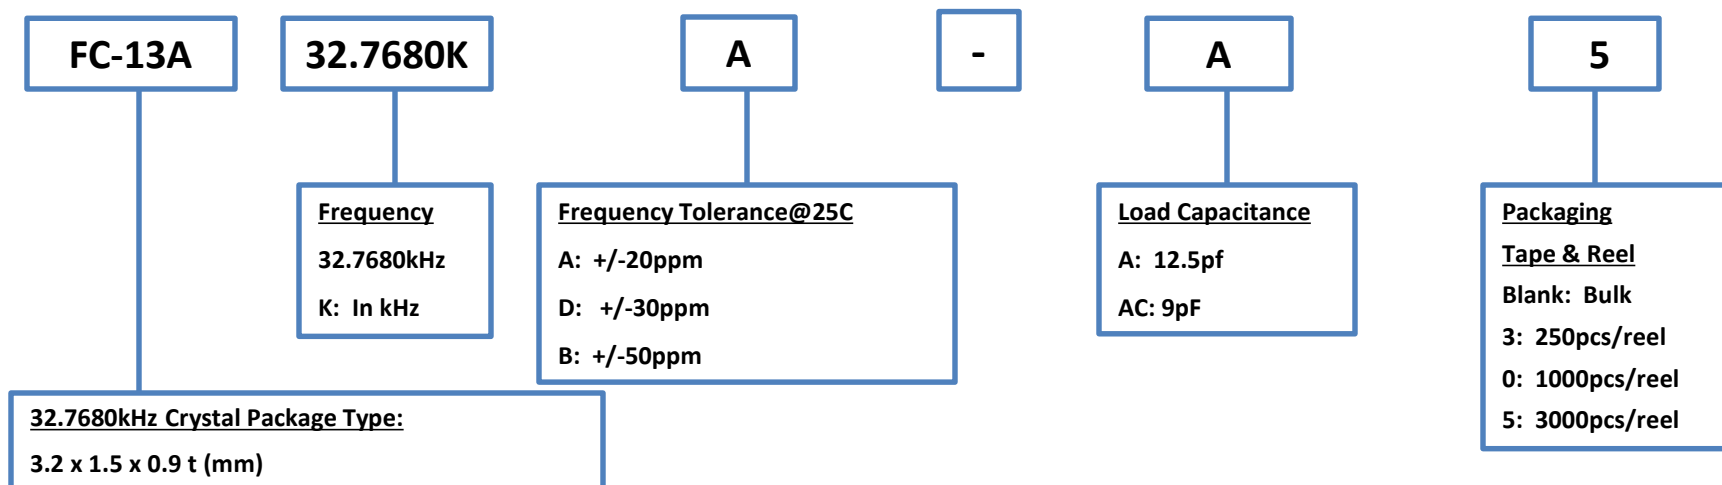

NOTES:

- 1) This product configuration guide is applicable only to 32.7680kHz Crystals. For other frequencies, please reference the Standard kHz Crystal Product Configuration System.
- 2) If you require a load capacitance other than the above listed, please contact your EEA representative for assistance.

EPSON


June, 2021

Product Configuration System



kHz Range Crystal Units

Discontinued

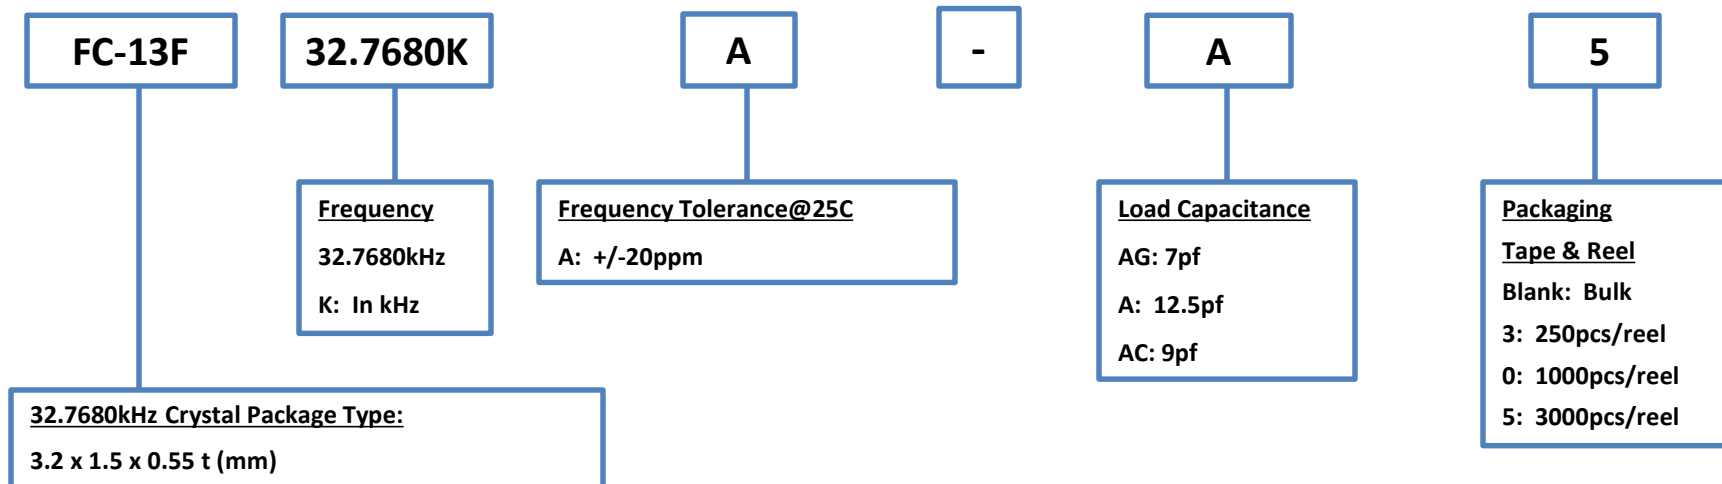

NOTES:

- 1) If you require a frequency or tolerance other than the above listed, please contact your EEA representative for assistance.


EPSON

June, 2021

Product Configuration System



kHz Range Crystal Unit

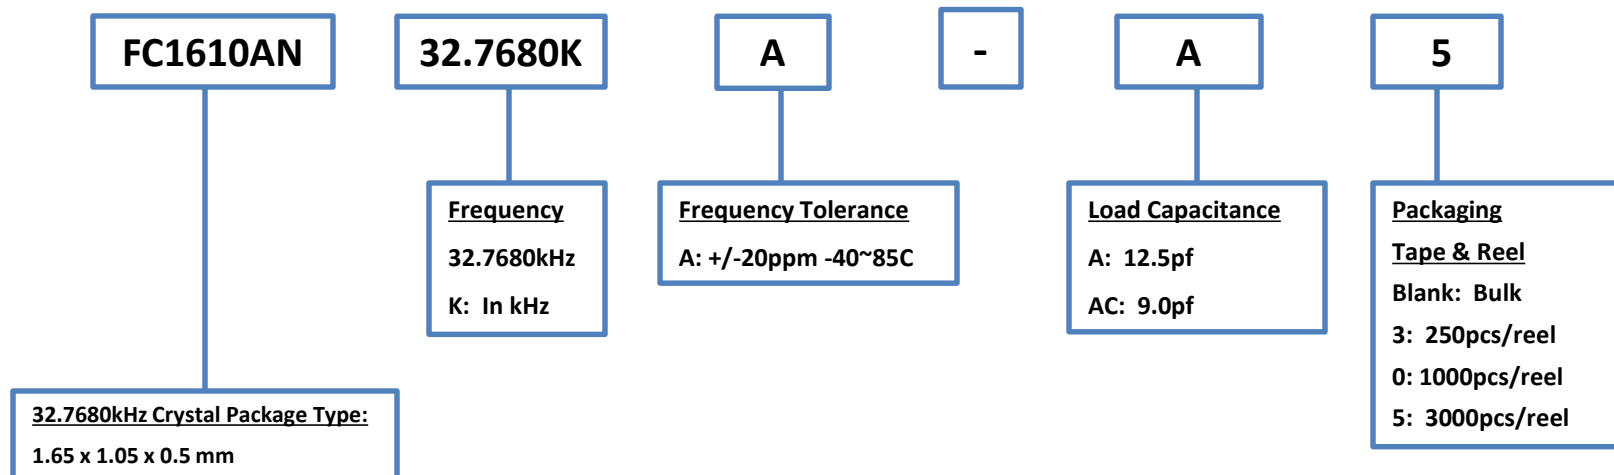

NOTES:


- 1) If you require a load capacitance other than the above listed, please contact your EEA representative for assistance.

Product Configuration System



kHz Range Crystals Units

Discontinued

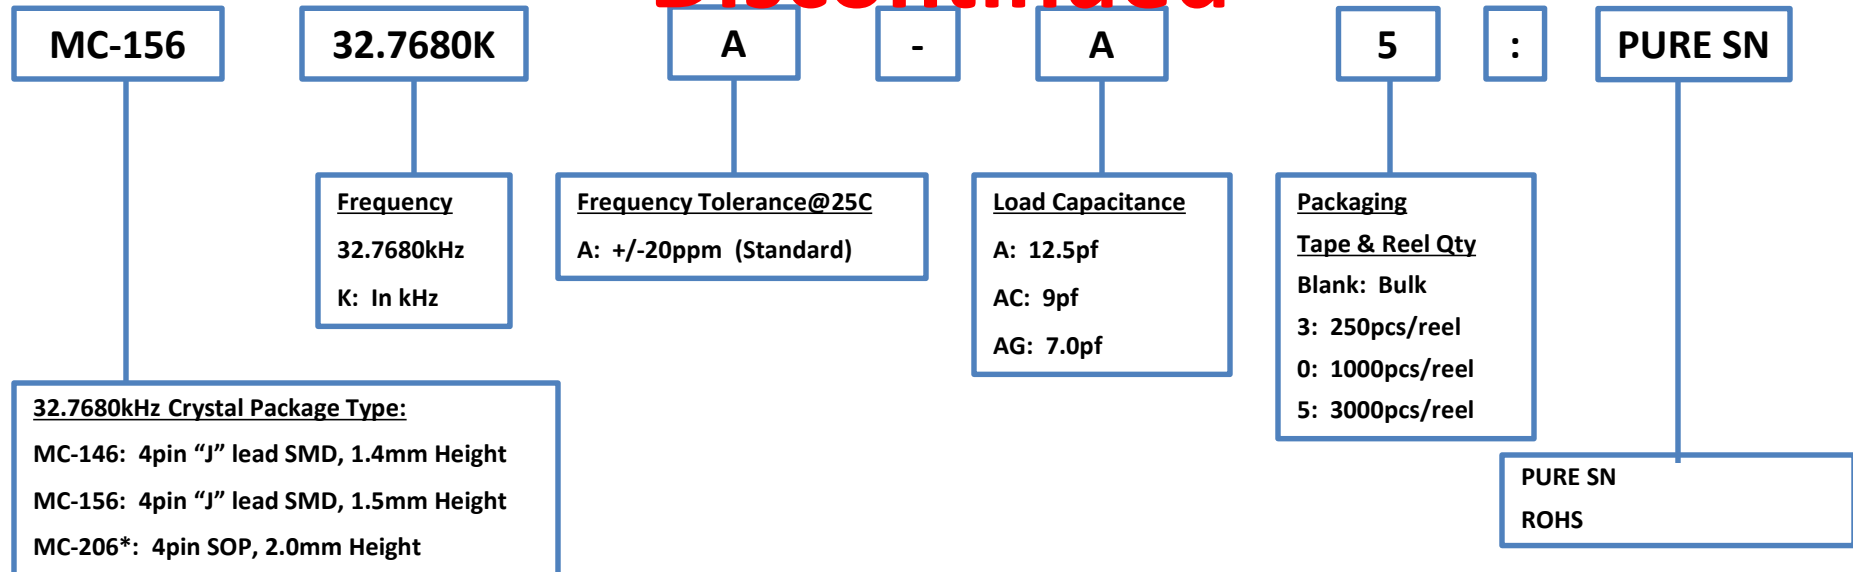

MC-206:
Not Recommended for New Designs

NOTES:

- 1) This product configuration guide is applicable only to 32.7680kHz Crystals. For other frequencies, please reference the Standard kHz Crystal Product Configuration System.
- 2) If you require a load capacitance other than the above listed, please contact your EEA representative for assistance.


EPSON

June, 2021



Product Configuration System

kHz Range Crystals Units

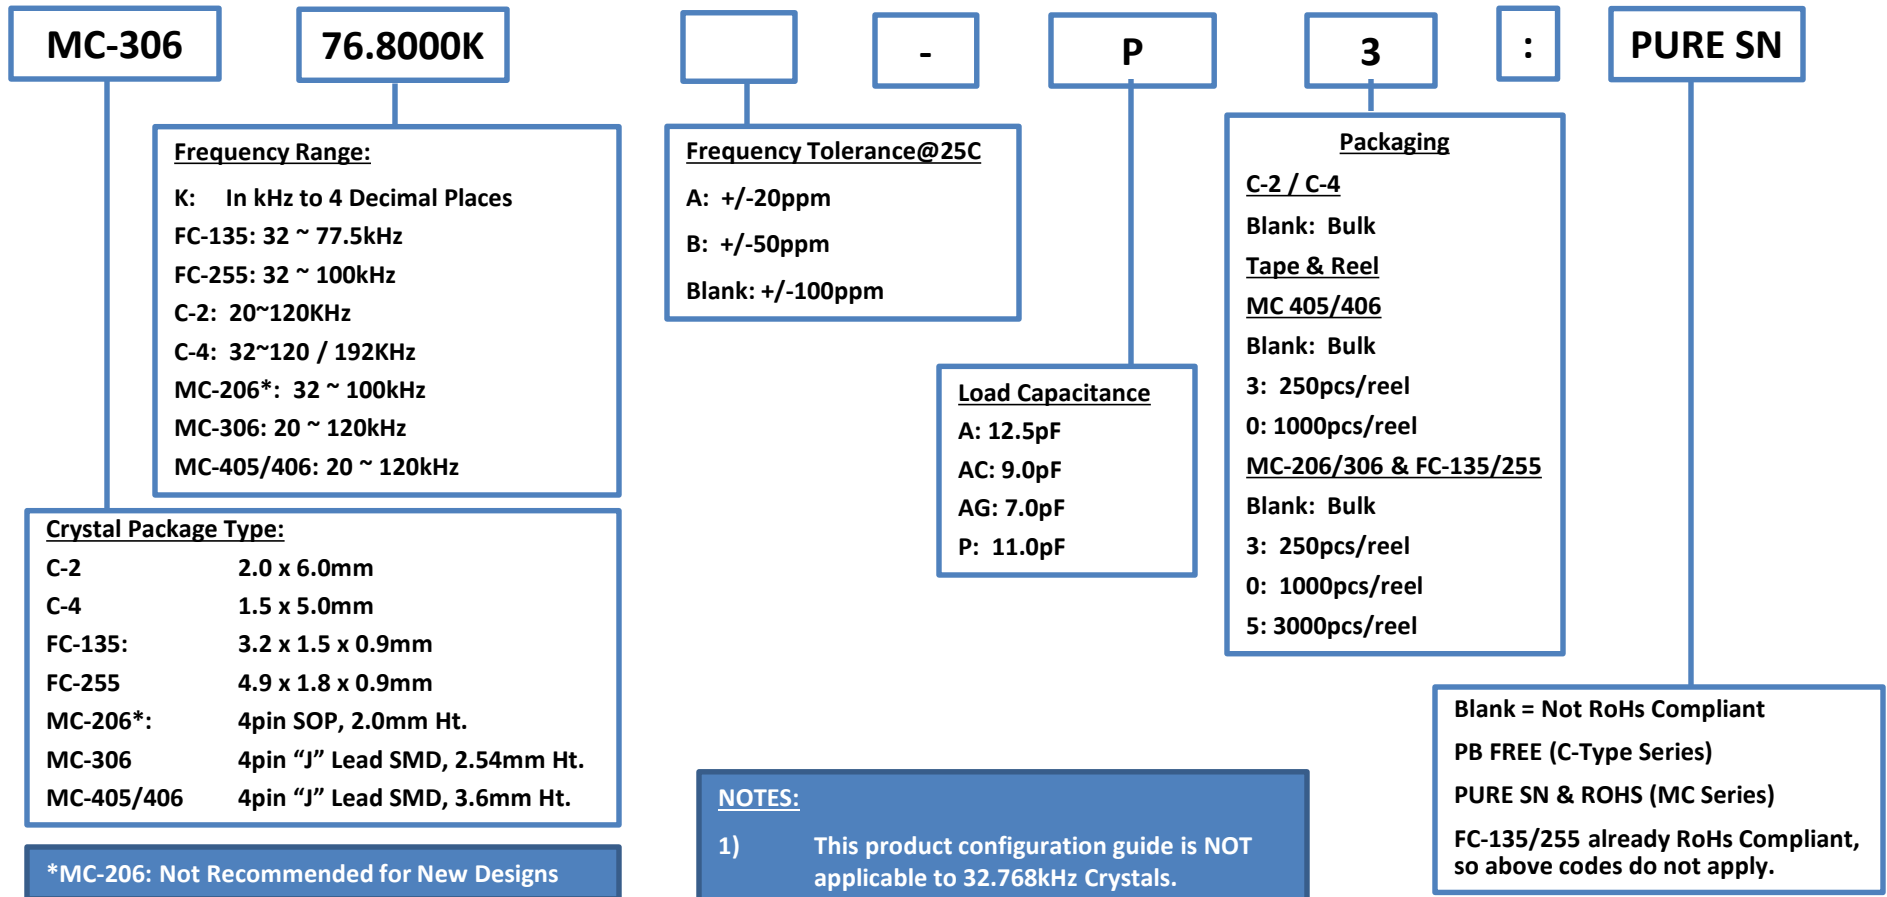

EPSON


June, 2021

Product Configuration System



kHz Range Crystals Units

Discontinued

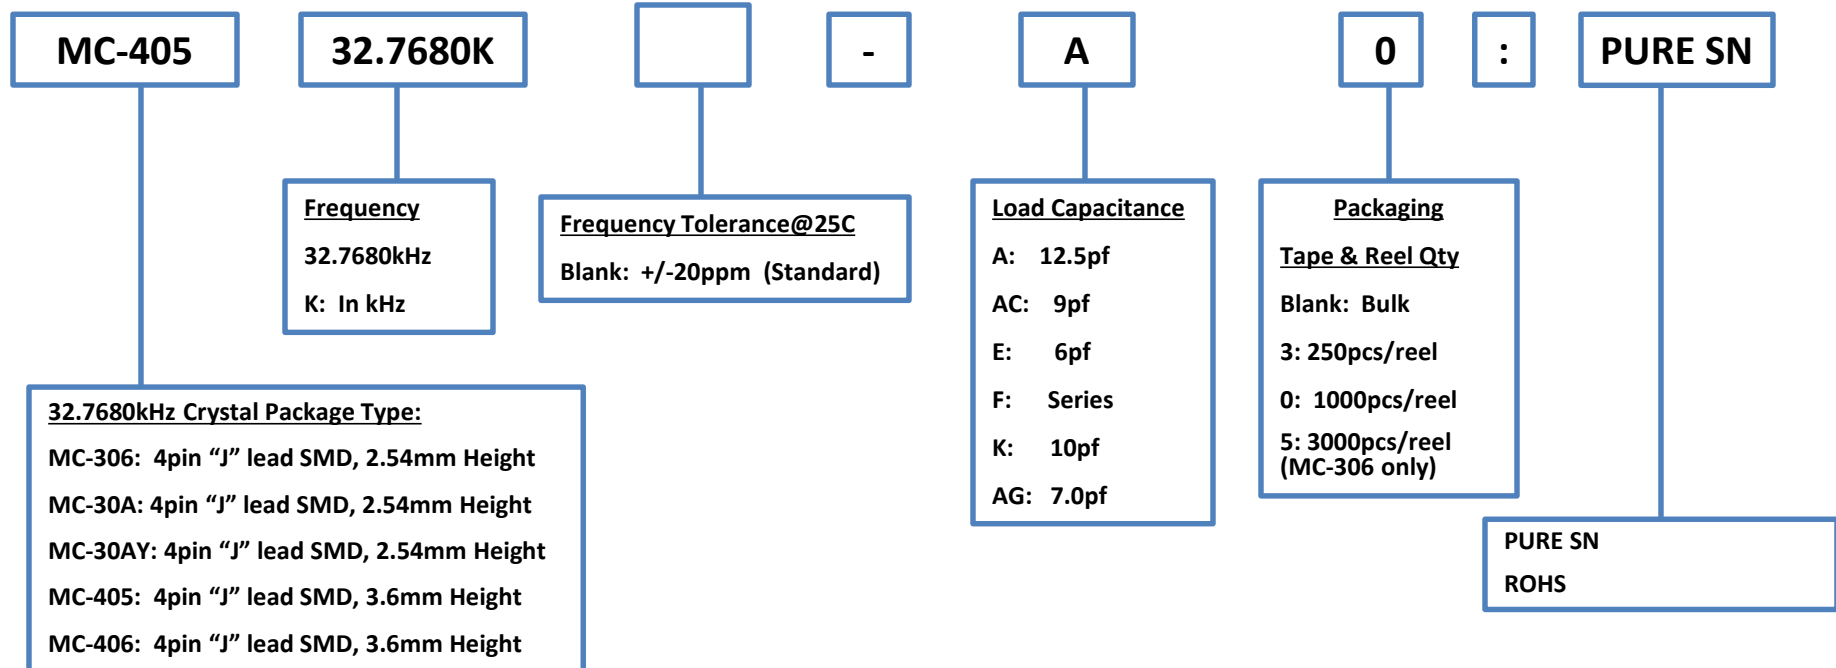

NOTES:

- 1) This product configuration guide is applicable only to 32.7680kHz Crystals. For other frequencies, please reference the Standard kHz Crystal Product Configuration System.
- 2) If you require a load capacitance other than the above listed, please contact your EEA representative for assistance.


EPSON

June, 2021

Product Configuration System



kHz Range Crystals Units

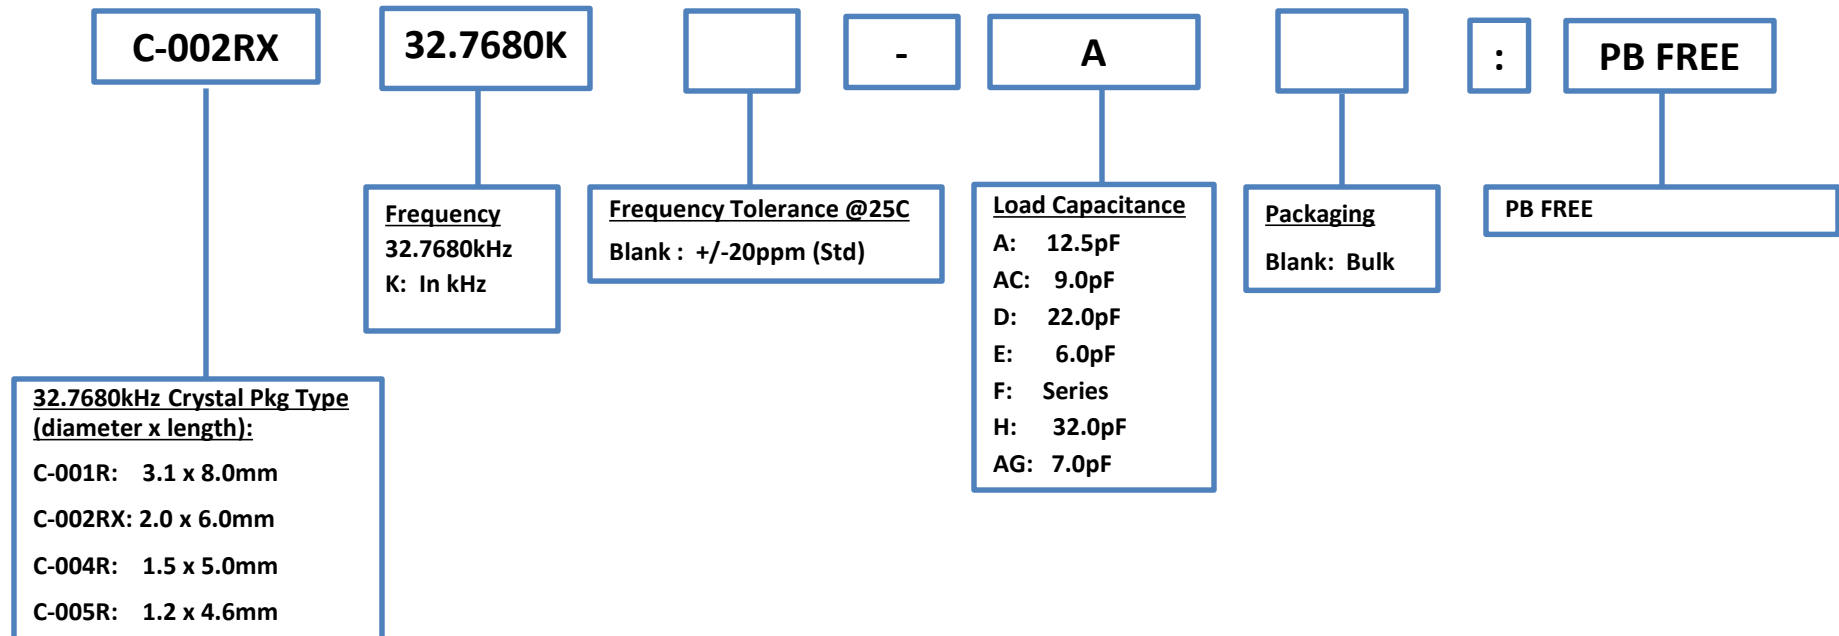

NOTES:

- 1) This product configuration guide is applicable only to 32.7680kHz crystals. For other frequencies, please refer to the Standard kHz Crystal Product Configuration System.
- 2) If you require a load capacitance other than the above listed, please contact your EEA representative for assistance.


EPSON

June, 2021

Product Configuration System



MHz Range Crystals Units

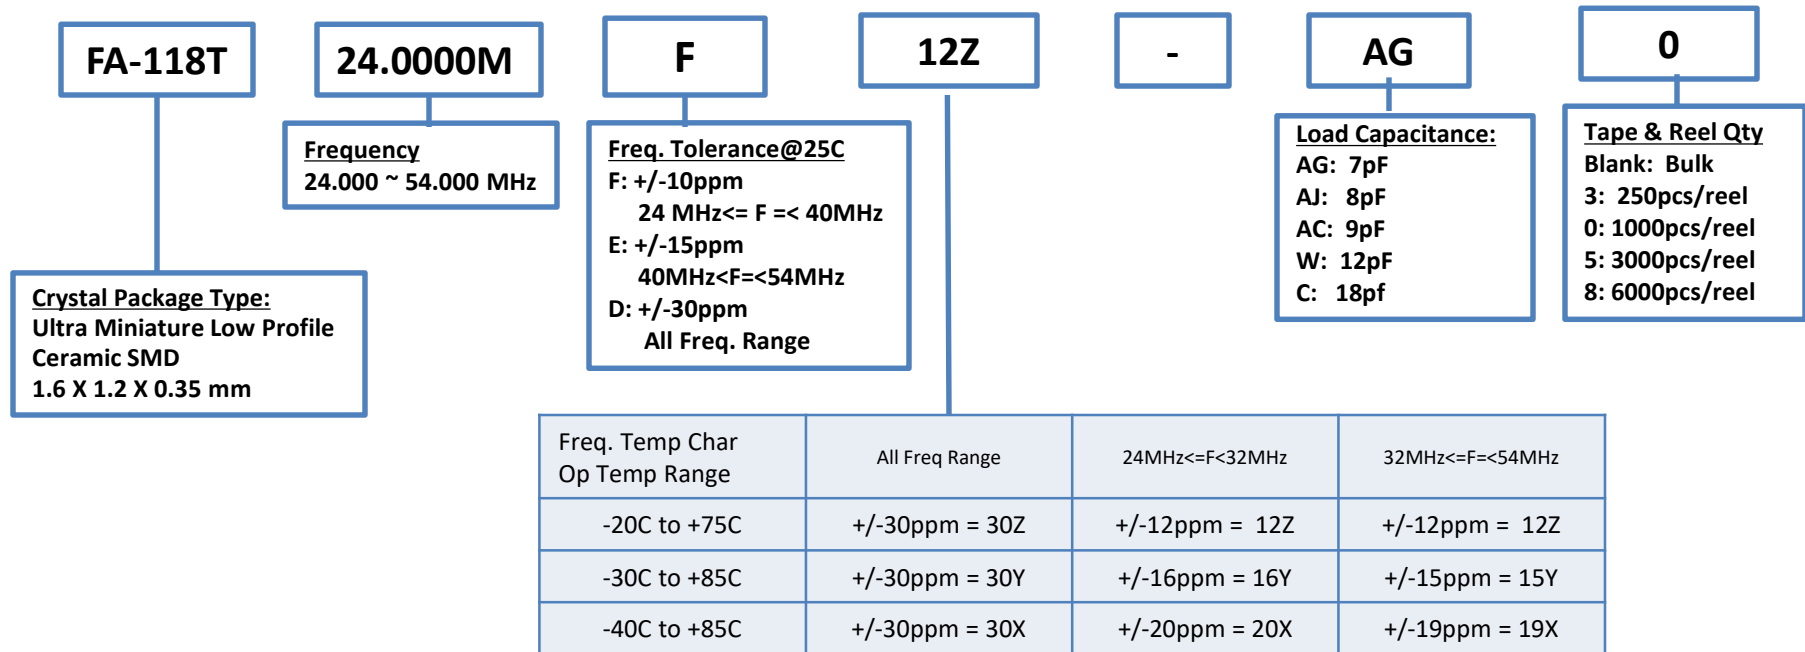

NOTES:

- 1) If you require frequency , tolerance, frequency temperature characteristics over temperature and load capacitance values other than the above listed, please contact your EEA representative for assistance.

EPSON


June, 2021

18

Product Configuration System



MHz Range Crystal Units

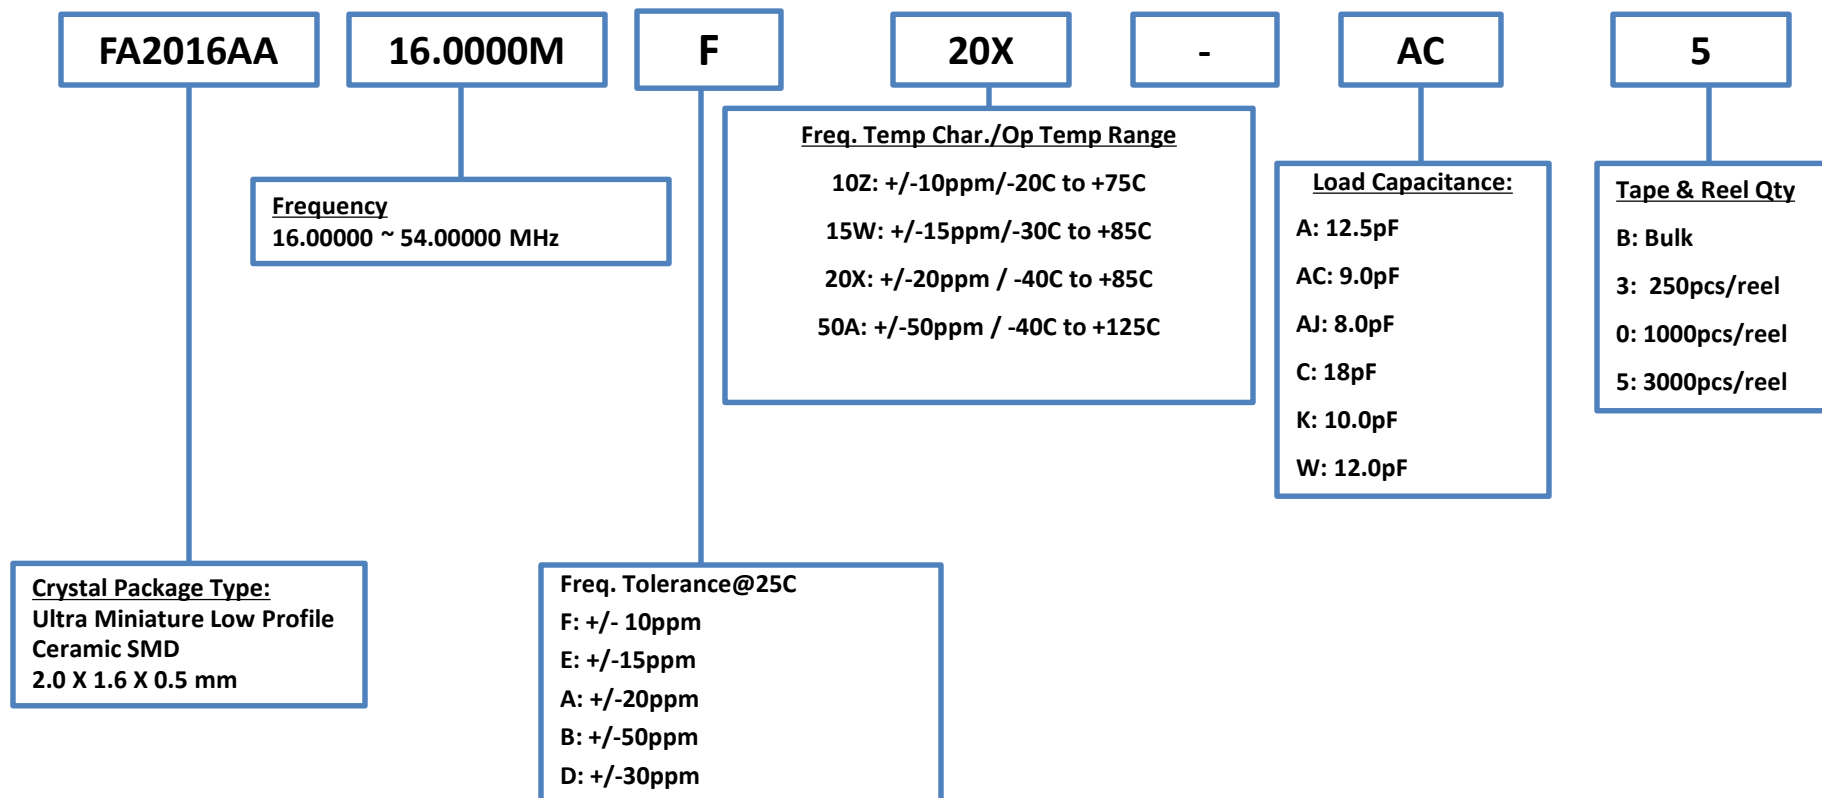

NOTES:

- 1) If you require frequency, tolerance, frequency temperature characteristics over temperature and load capacitance values other than the above listed, please contact your EEA representative for assistance.


EPSON

June, 2021

Product Configuration System



MHz Range Crystal Units

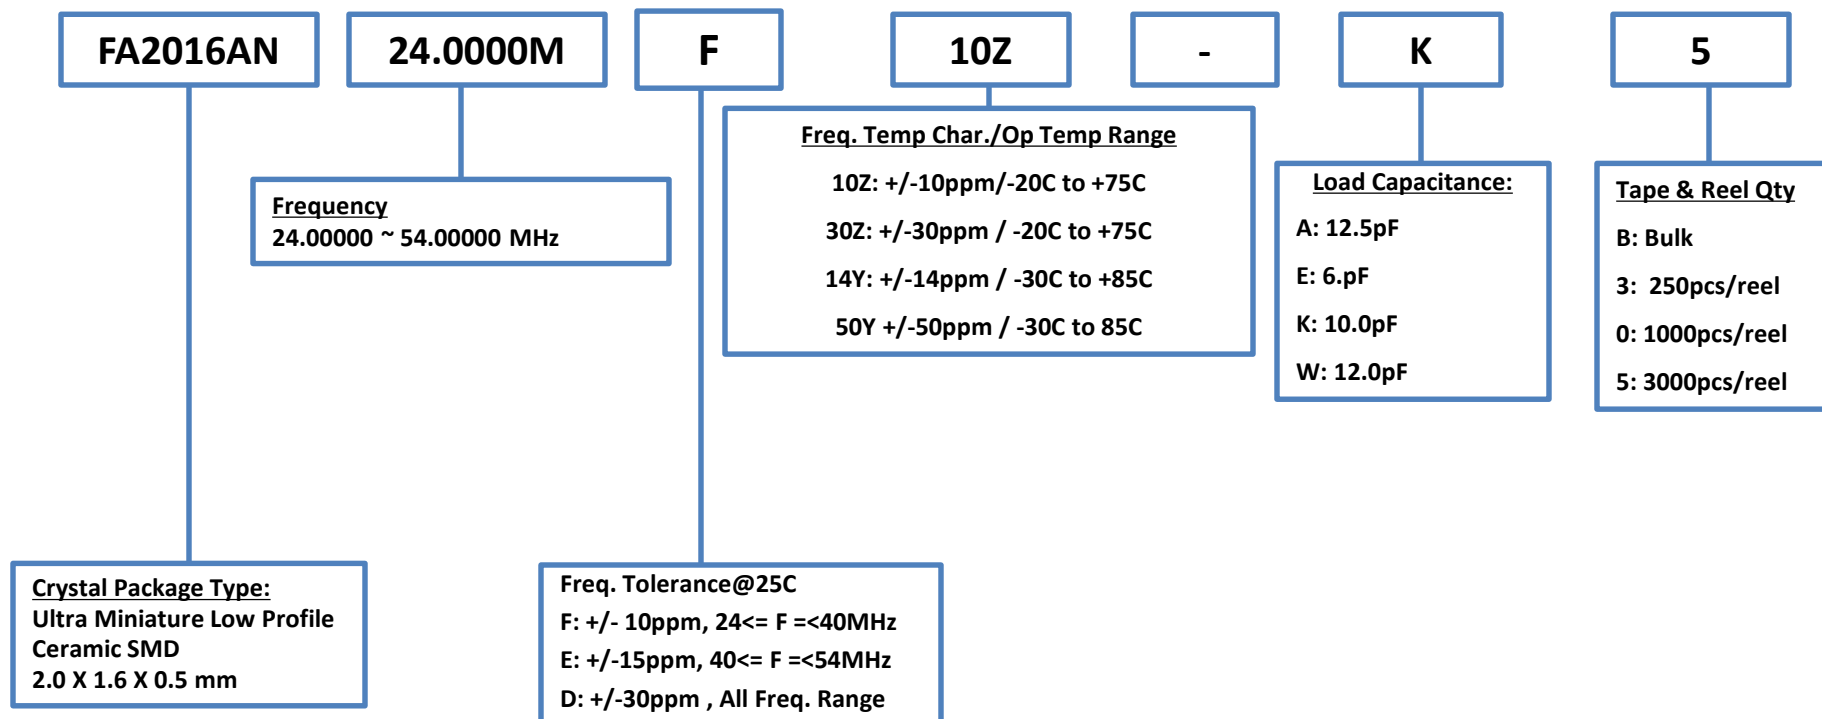

NOTES:

- 1) If you require frequency , tolerance, frequency temperature characteristics over temperature and load capacitance values other than the above listed, please contact your EEA representative for assistance.


EPSON

June, 2021

Product Configuration System



MHz Range Crystal Units

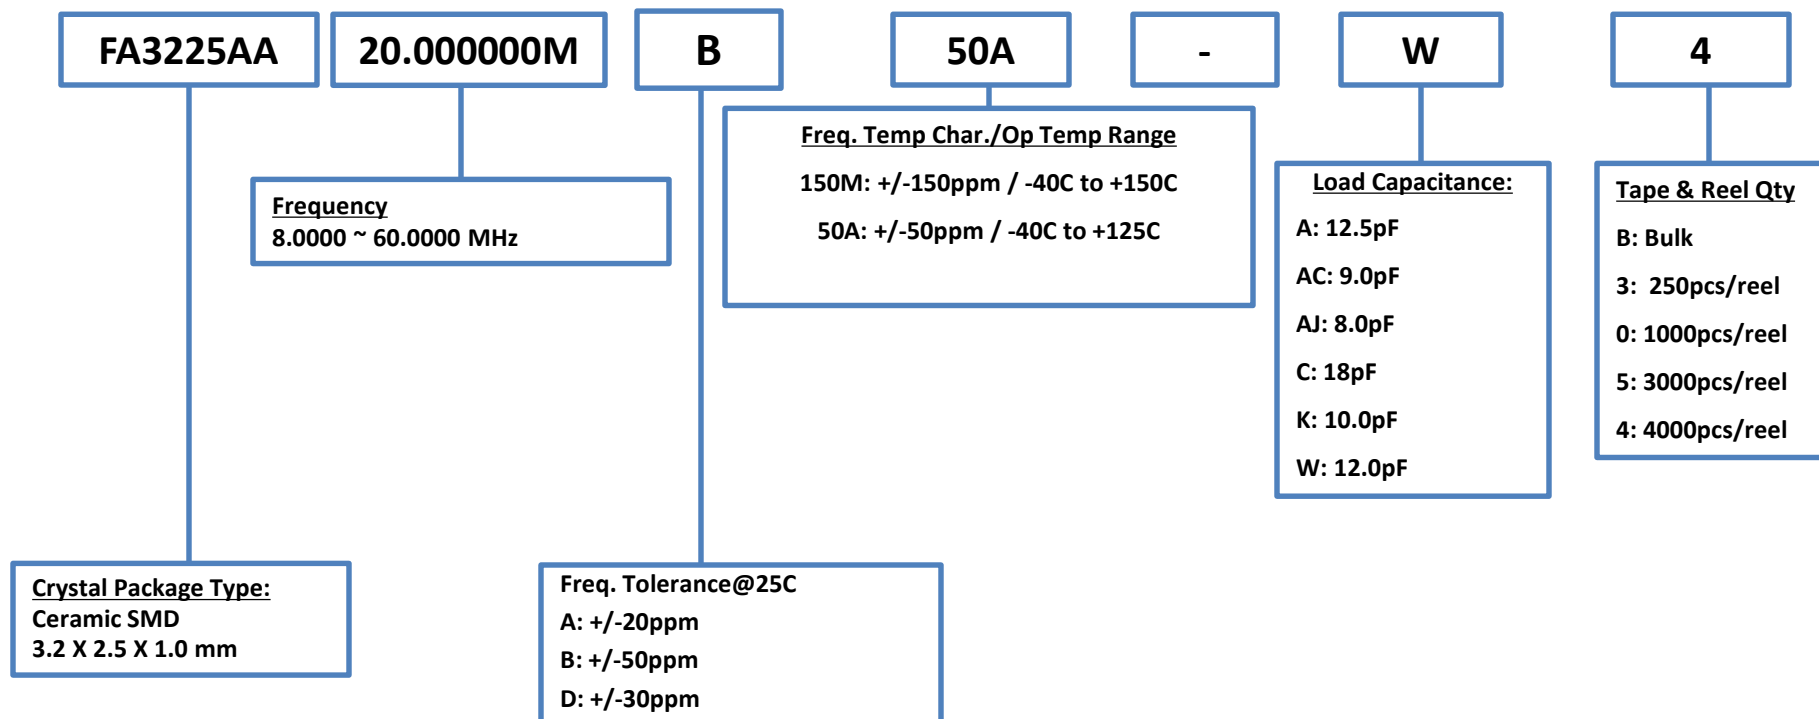

NOTES:

- 1) If you require frequency, tolerance, frequency temperature characteristics over temperature and load capacitance values other than the above listed, please contact your EEA representative for assistance.


EPSON

June, 2021

Product Configuration System



MHz Range Crystals Units

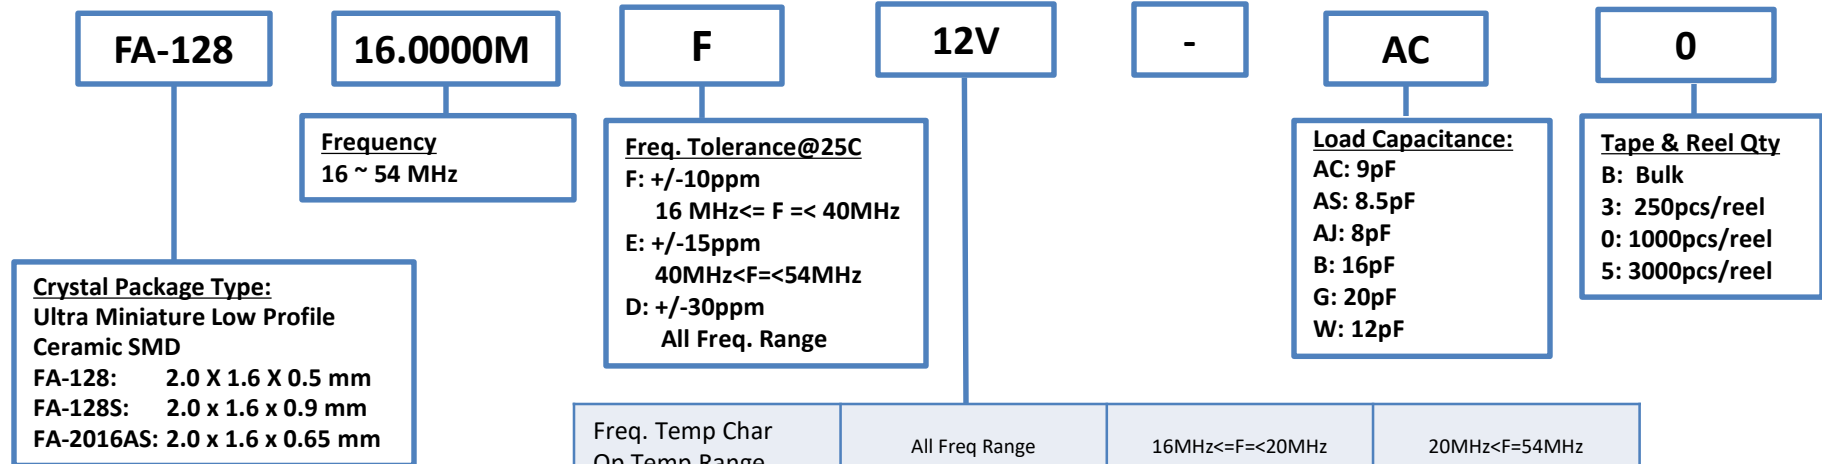

Freq. Temp Char Op Temp Range	All Freq Range	16MHz<=F<=20MHz	20MHz<F=54MHz
-20C to +75C	+/-20ppm = 20Z	+/-12ppm = 12Z	+/-10ppm = 10Z
-20C to +80C	+/-20ppm = 20K	+/-12ppm = 12K	+/-10ppm = 10K
-20C to +85C	+/-20ppm = 20P	+/-12ppm = 12P	+/-12ppm = 12P
-30C to +70C	+/-28ppm = 28R	+/-17ppm = 17R	+/-14ppm = 14R
-30C to +75C	+/-28ppm = 28E	+/-17ppm = 17E	+/-14ppm = 14E
-30C to +80C	+/-30ppm = 30W	+/-17ppm = 17W	+/-14ppm = 14W
-30C to +85C	+/-30ppm = 30Y	+/-17ppm = 17Y	+/-14ppm = 14Y
-30C to +85C	+/-50ppm = 50Y	+/-17ppm = 17Y	+/-14ppm = 14Y
-40C to +85C	+/-40ppm = 40X	+/-22ppm = 22X	+/-20ppm = 20X

NOTE: 81Z = +8/-10ppm / -20C to +75C

EPSON

June, 2021


NOTES:

- 1) If you require frequency, tolerance, frequency temperature characteristics over temperature and load capacitance values other than the above listed, please contact your EEA representative for assistance.

Product Configuration System



MHz Range Crystals Units

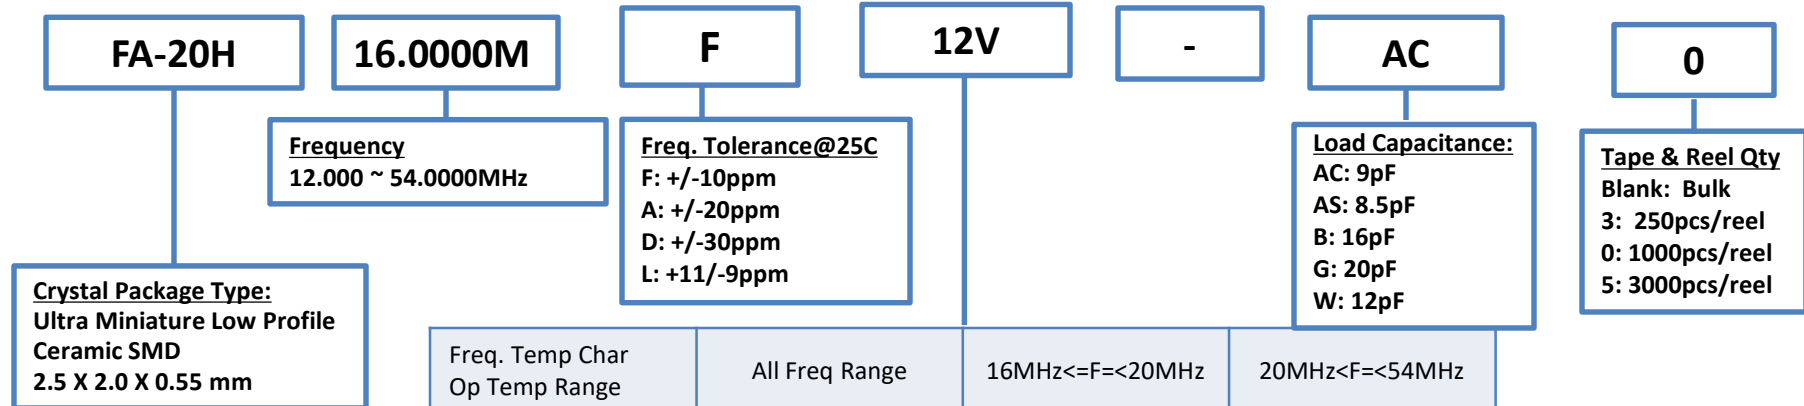

Freq. Temp Char Op Temp Range	All Freq Range	16MHz<=F<20MHz	20MHz<F<54MHz
-20C to +70C	+/-20ppm = 20V	+/-12ppm = 12V	+/-10ppm = 10V
-20C to +70C	+/-30ppm = 30V	+/-12ppm = 12V	+/-10ppm = 10V
-20C to +75C	+/-20ppm = 20Z	+/-12ppm = 12Z	+/-10ppm = 10Z
-20C to +80C	+/-20ppm = 20K	+/-12ppm = 12K	+/-10ppm = 10K
-20C to +85C	+/-20ppm = 20P	+/-12ppm = 12P	+/-12ppm = 12P
-30C to +70C	+/-28ppm = 28R	+/-17ppm = 17R	+/-14ppm = 14R
-30C to +75C	+/-28ppm = 28E	+/-17ppm = 17E	+/-14ppm = 14E
-30C to +80C	+/-30ppm = 30W	+/-17ppm = 17W	+/-14ppm = 14W
-30C to +85C	+/-30ppm = 30Y	+/-17ppm = 17Y	+/-14ppm = 14Y
-30C to +85C	+/-50ppm = 50Y	+/-17ppm = 17Y	+/-14ppm = 14Y
-40C to +85C	+/-40ppm = 40X	+/-22ppm = 22X	+/-20ppm = 20X

NOTE: 81Z = +8/-10ppm / -20C to +75C

EPSON

June, 2021


NOTES:

- 1) If you require frequency, tolerance, frequency temperature characteristics over temperature and load capacitance values other than the above listed, please contact your EEA representative for assistance.

Product Configuration System



MHz Range Crystal Units

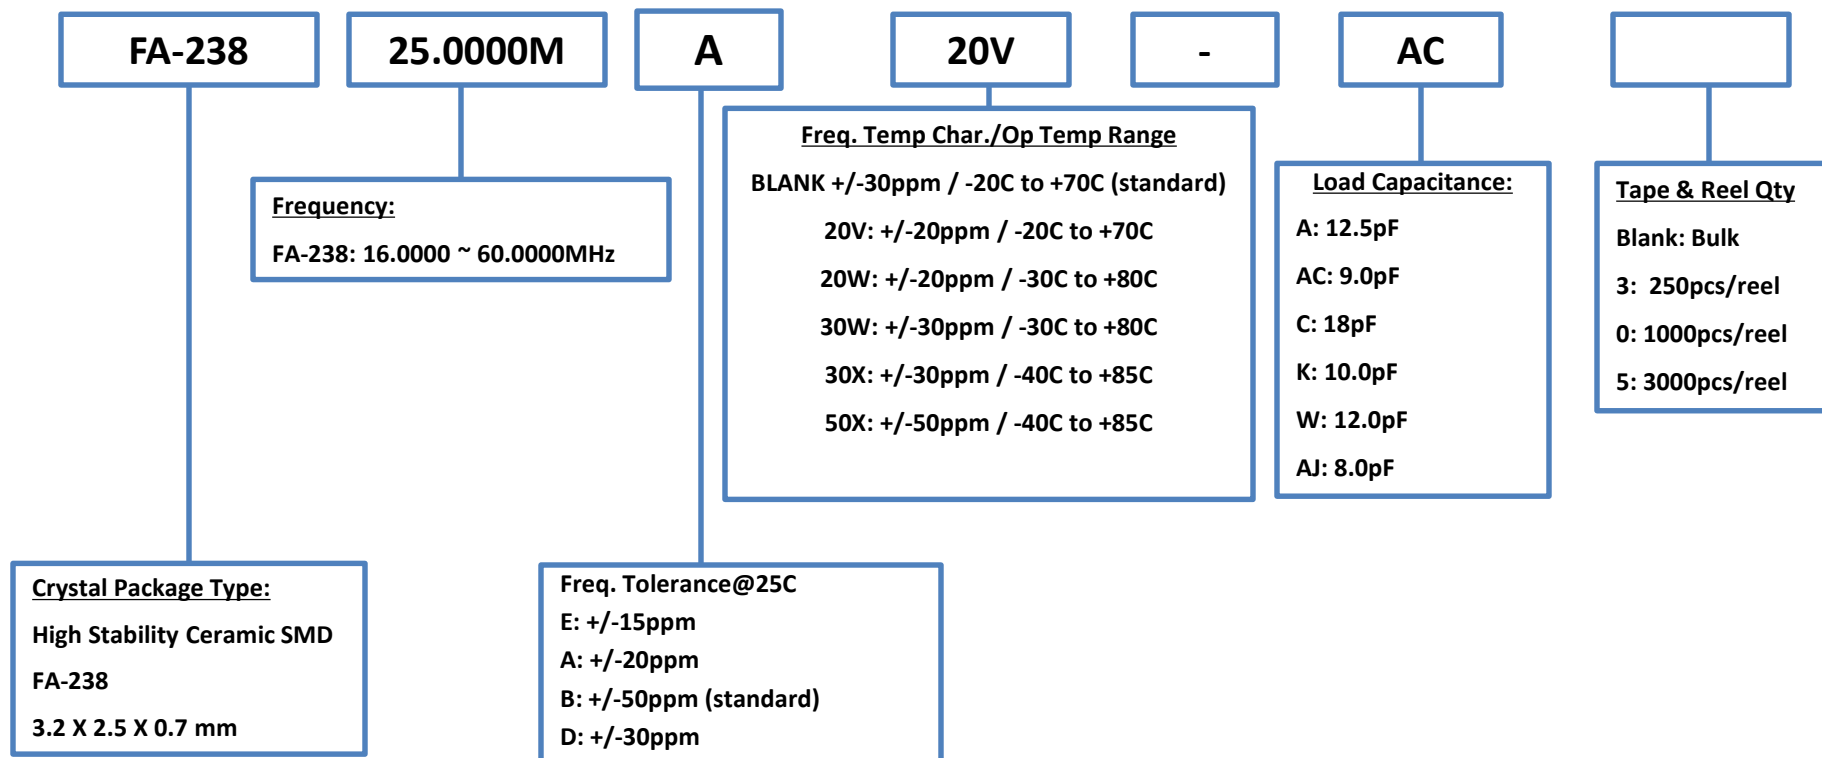

NOTES:

- 1) If you require frequency , tolerance, frequency temperature characteristics over temperature and load capacitance values other than the above listed, please contact your EEA representative for assistance.


EPSON

June, 2021

Product Configuration System



MHz Range Crystal Units

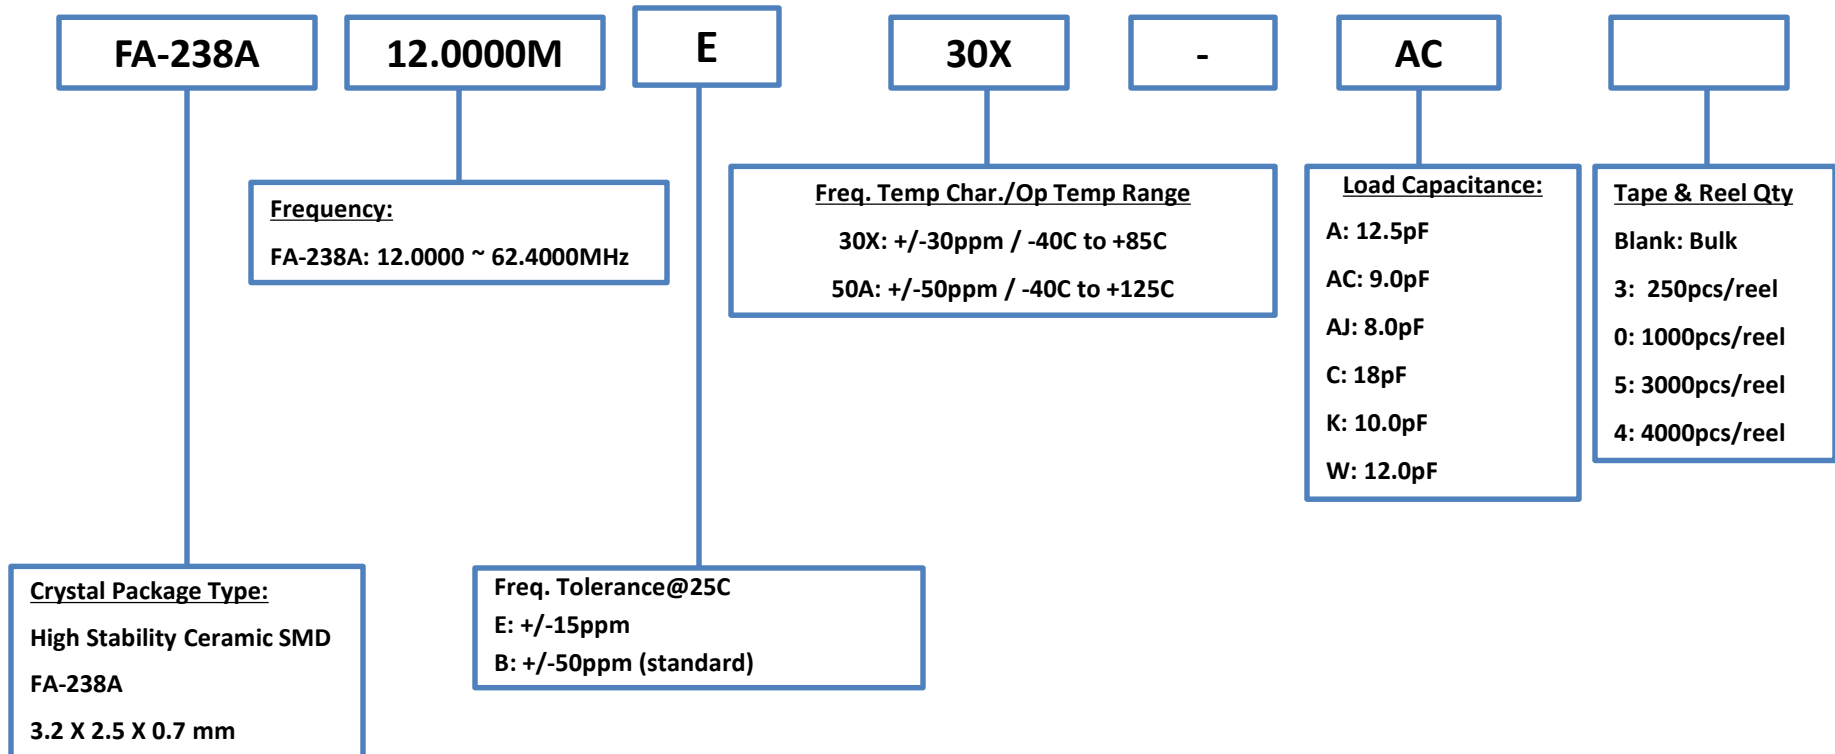

NOTES:

- 1) If you require frequency , tolerance, frequency temperature characteristics over temperature and load capacitance values other than the above listed, please contact your EEA representative for assistance.


EPSON

June, 2021

Product Configuration System



MHz Range Crystal Units

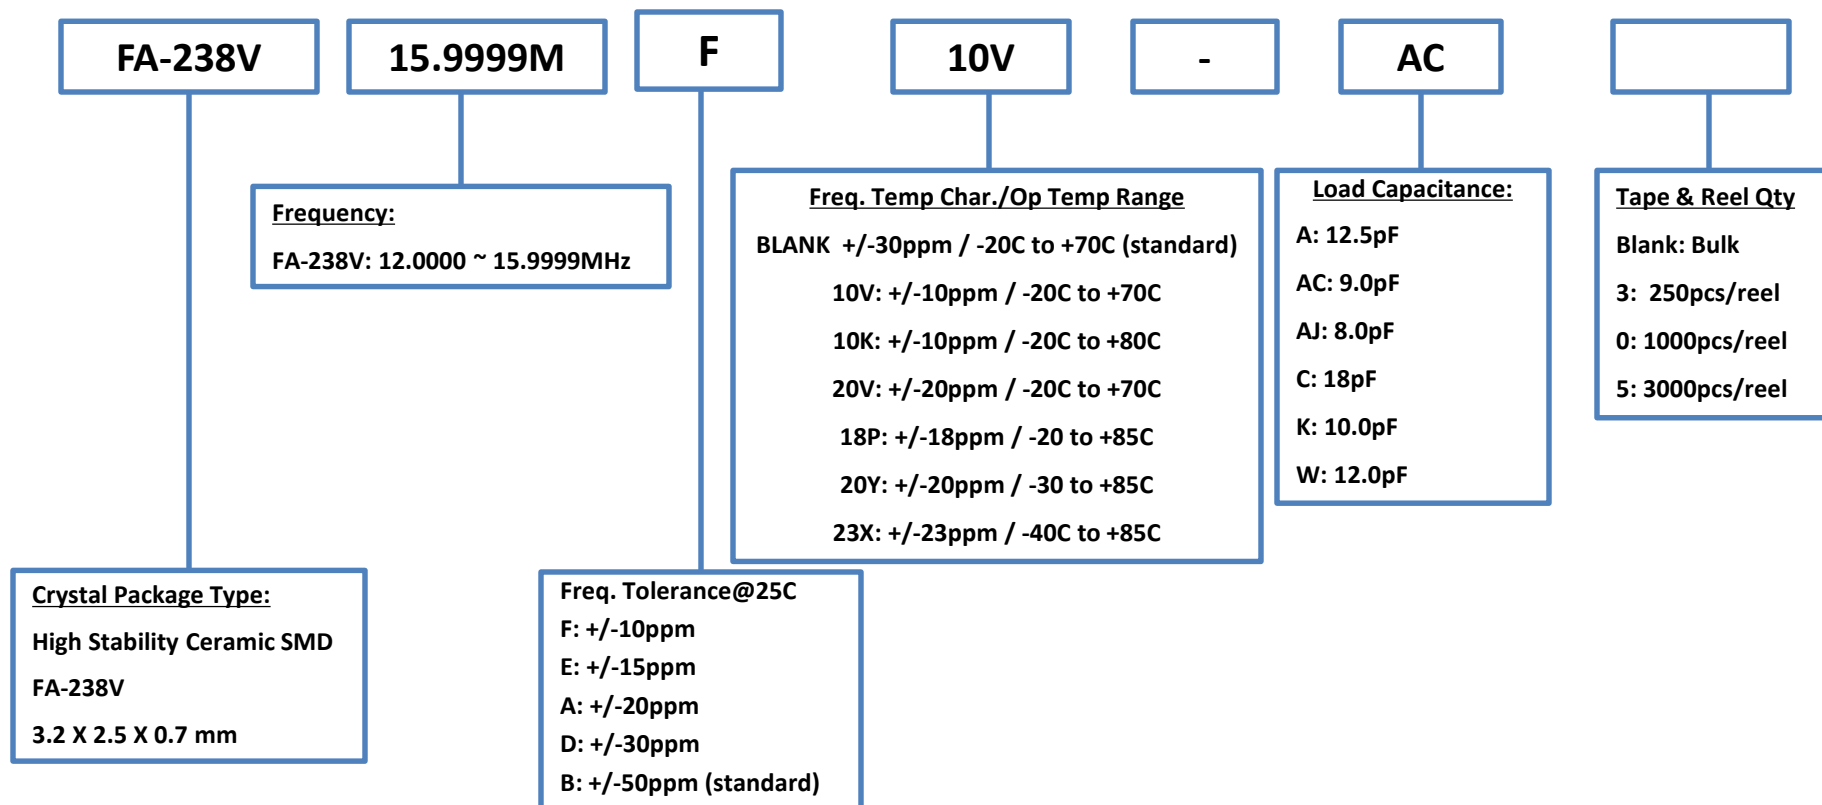

NOTES:

- 1) If you require frequency , tolerance, frequency temperature characteristics over temperature and load capacitance values other than the above listed, please contact your EEA representative for assistance.


EPSON

June, 2021

Product Configuration System



MHz Range Crystal Units

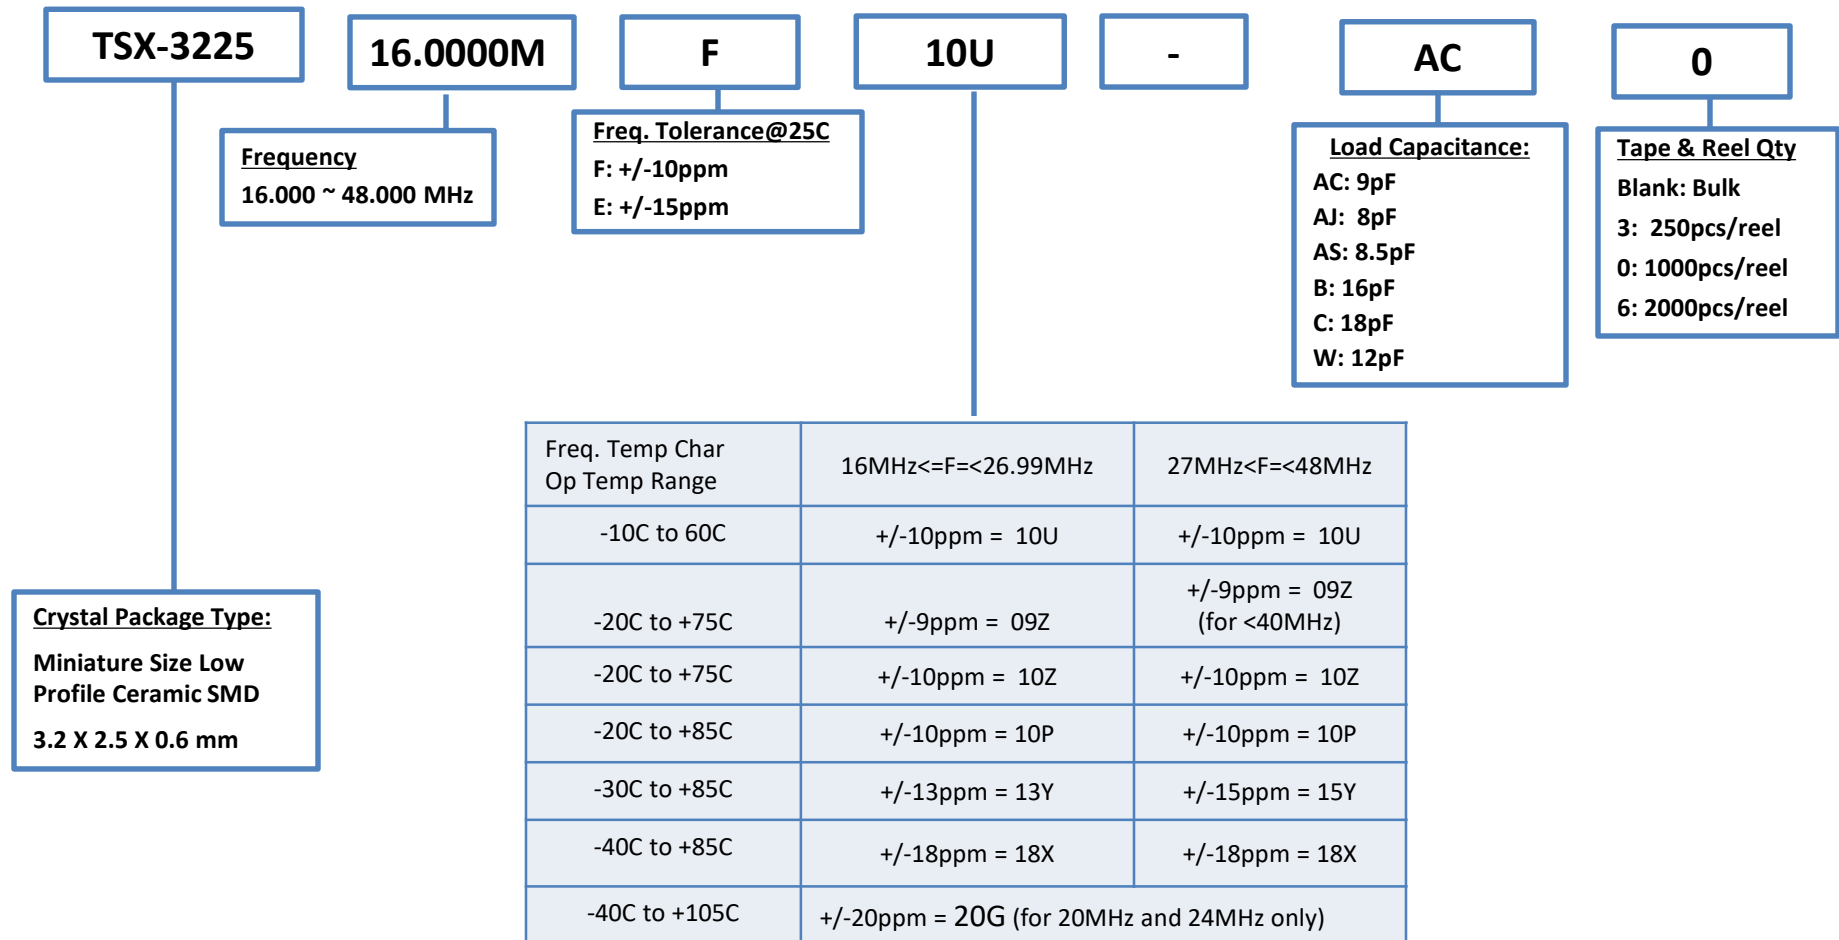

EPSON

June, 2021

NOTES:


- 1) If you require frequency, tolerance, frequency temperature characteristics over temperature and load capacitance values other than the above listed, please contact your EEA representative for assistance.

Product Configuration System



MHz Range Crystal Units

Discontinued

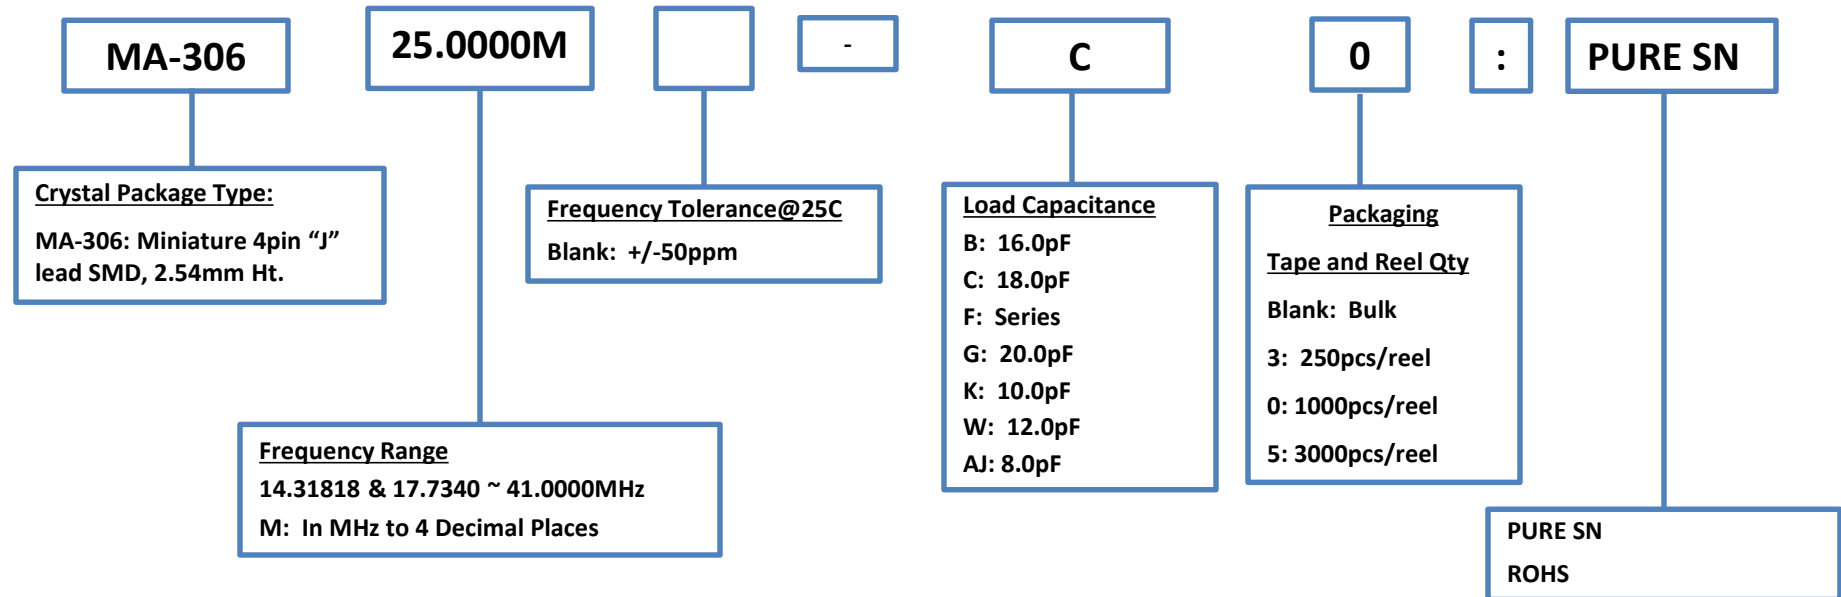

NOTES:

- 1) If you require frequency, tolerance, frequency temperature characteristics over temperature and load capacitance values other than the above listed, please contact your EEA representative for assistance.

EPSON


June, 2021

Product Configuration System



MHz Range Crystal Units

Discontinued

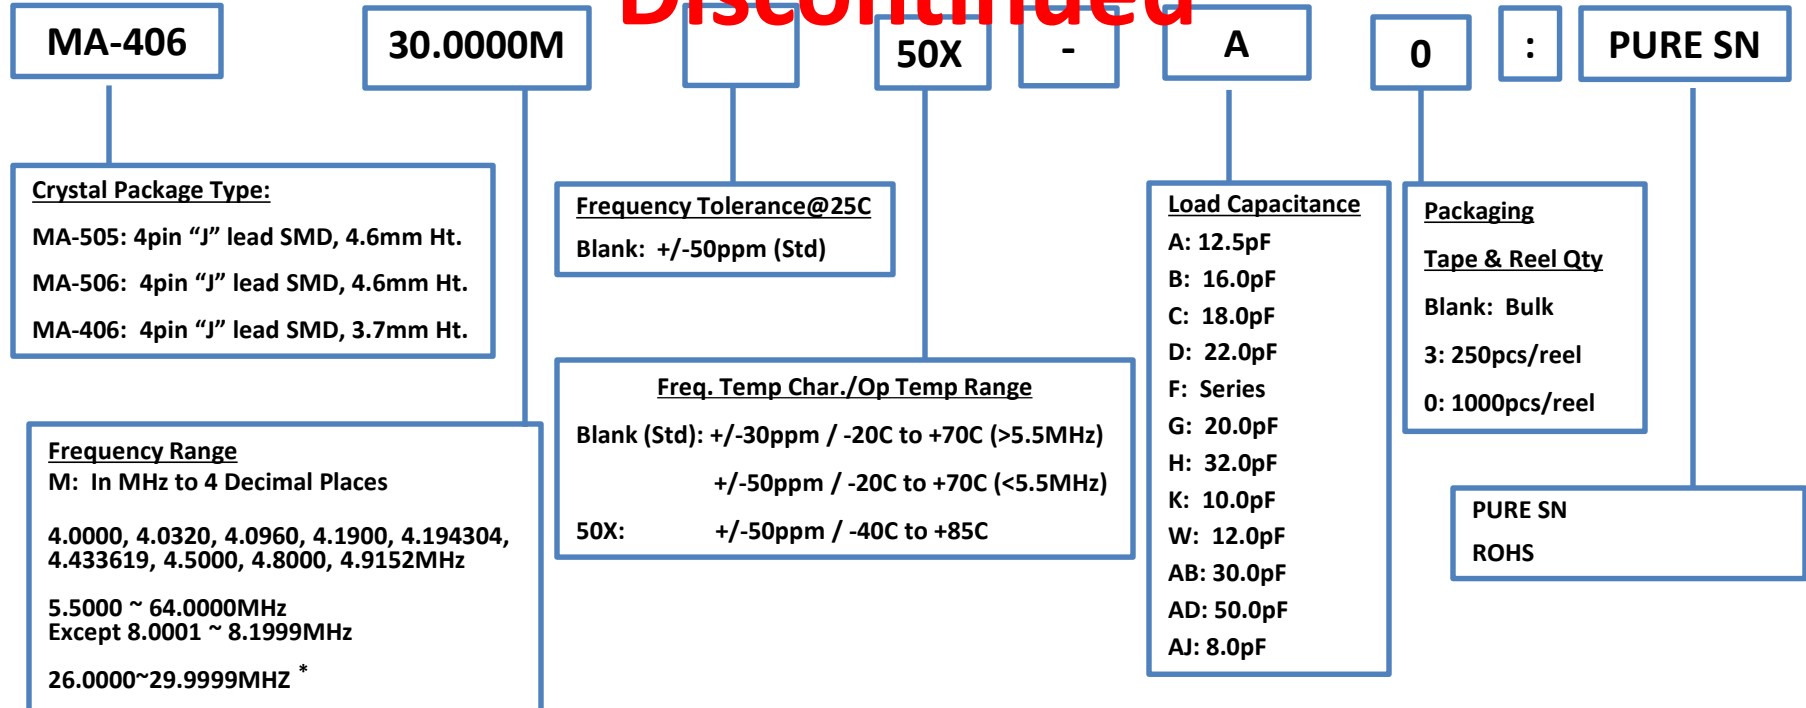

NOTES:

- 1) If you require frequency, tolerance, frequency temperature characteristics over temperature and load capacitance values other than the above listed, please contact your EEA representative for assistance.
- 2) For frequencies between 26.0000MHz and 29.9999MHz, please specify "(FUND)" at end of part number if fundamental mode required. Otherwise, 3rd Overtone is default.

EPSON

June, 2021


29

Product Configuration System



MHz Range Crystal Units

Discontinued

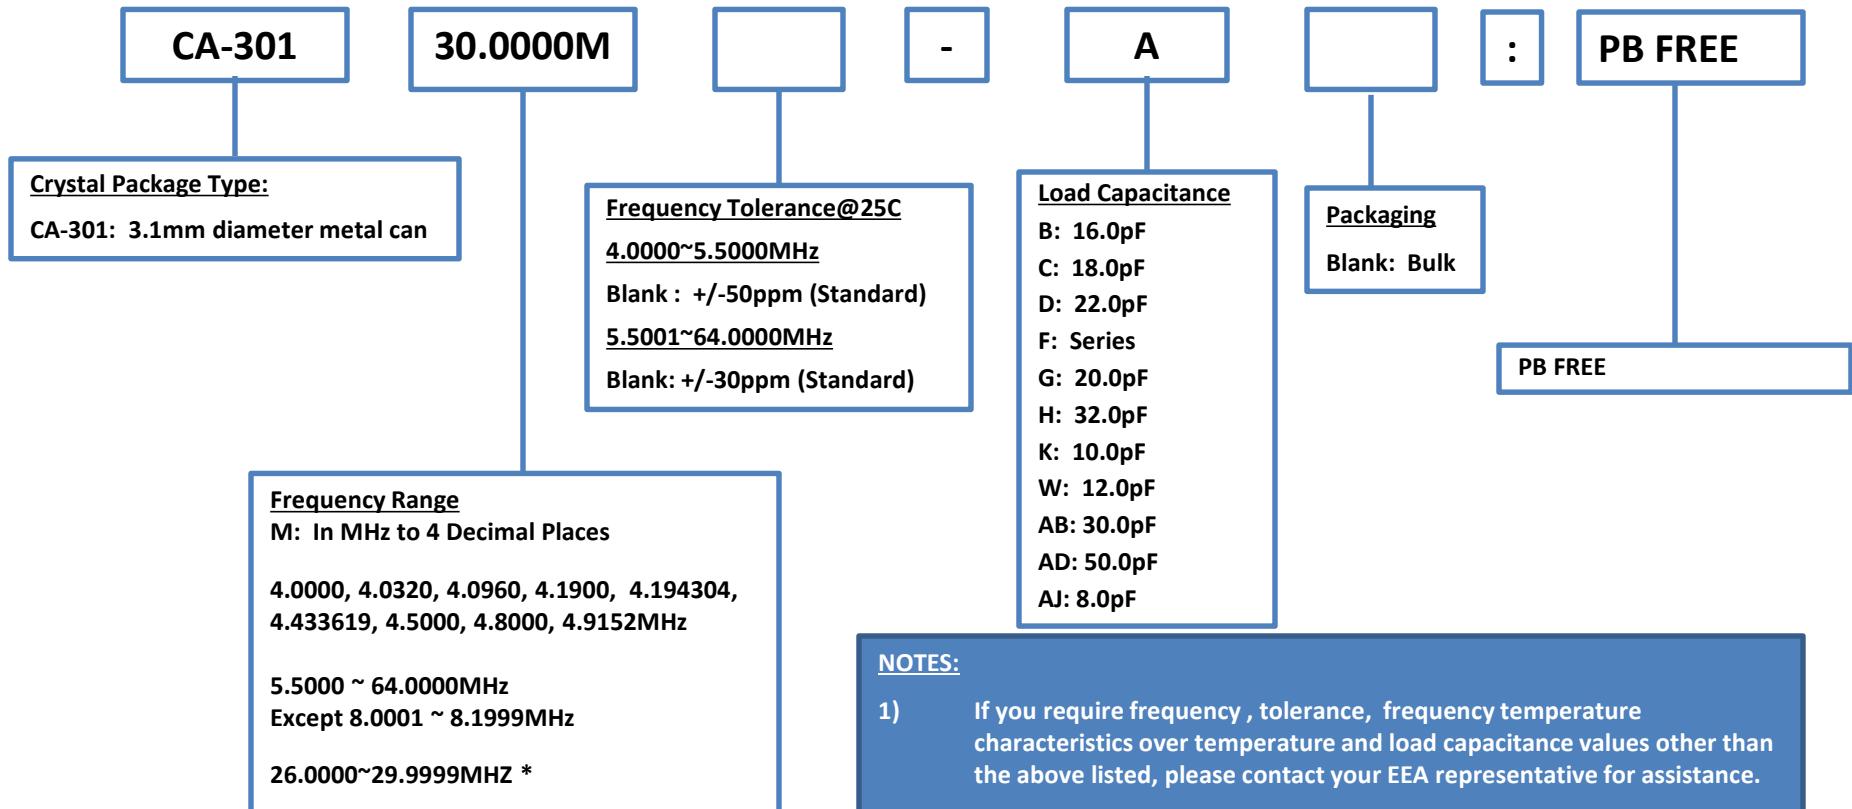

NOTES:

- 1) If you require frequency , tolerance, frequency temperature characteristics over temperature and load capacitance values other than the above listed, please contact your EEA representative for assistance.
- 2) For frequencies between 26.0000MHz and 29.9999MHz, please specify "(FUND)" at end of part number if fundamental mode required. Otherwise, 3rd Overtone is default.

EPSON

June, 2021

30

Product Configuration System

Crystal Units Load Cap Codes and Values (as of March 2014)

Load Cap Code	Load Cap Value
AZ	3.5
VJ	4.0
EE	4.4
AT	4.8
X	5.0
JJ	5.4
E	6.0
FF	6.4
DD	6.5
VC	6.7
AG	7.0
AR	7.1
JK	7.4
VB	7.6
AN	7.8
AJ	8.0
AS	8.5
CC	8.7
GG	8.8
AC	9.0
AM	9.2

Load Cap Code	Load Cap Value
AL	9.5
S	9.6
VF	9.8
K	10.0
HH	10.4
AK	10.5
AP	10.7
P	11.0
AY	11.2
AW	11.5
W	12.0
A	12.5
T	13.0
N	13.5
Y	14.0
VH	14.5
R	15.0
B	16.0
AV	17.0
C	18.0
L	18.3

Load Cap Code	Load Cap Value
J	18.5
AQ	19.0
G	20.0
AF	21.5
D	22.0
AU	22.5
AE	22.9
AH	23.0
V	24.0
AI	25.0
Z	26.0
AA	27.0
Q	28.0
AB	30.0
H	32.0
I	33.0
U	47.0
AD	50.0
M	100.0
F	Series

Product Configuration Guide

OSCILLATORS



- SPXO
- Programmable
- Spread Spectrum
- High Stability




EPSON

June, 2021

Product Configuration System



Crystal Oscillators - SPXO

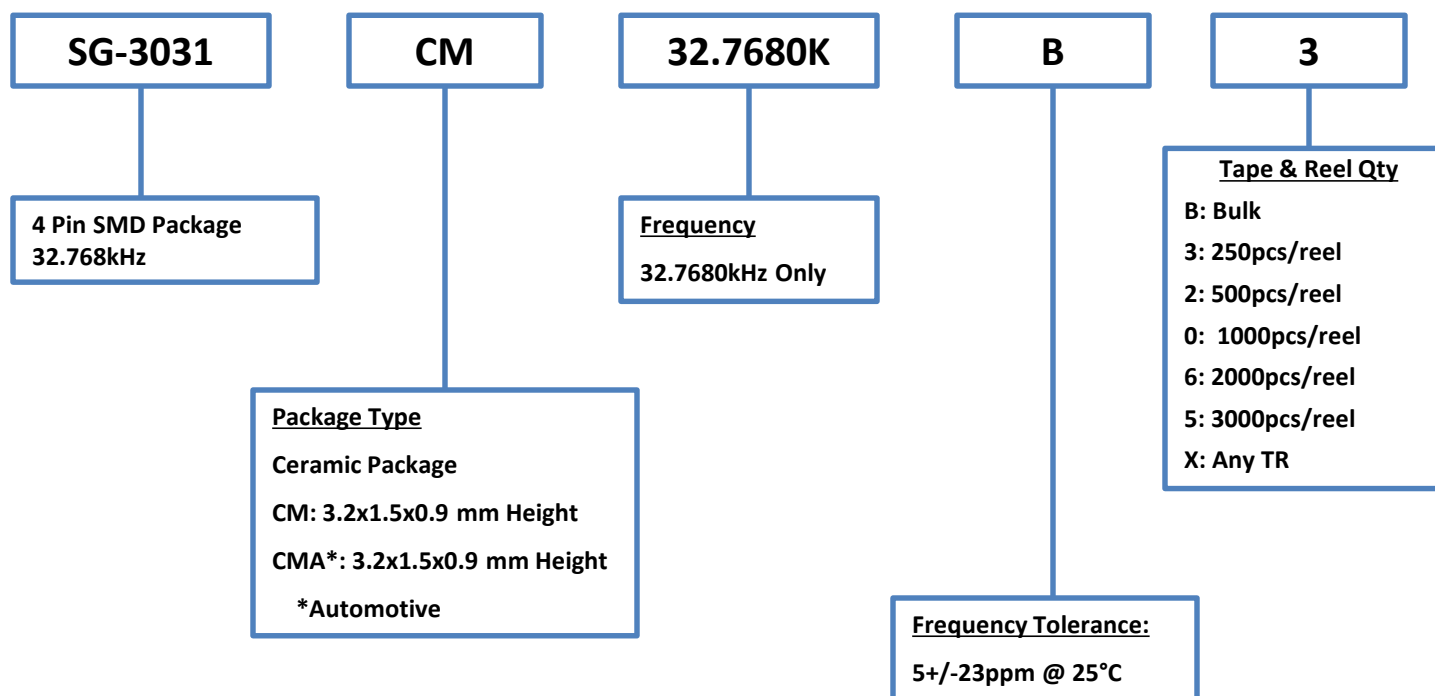

EPSON

June, 2021

NOTE:


Please contact us for requirements not listed in this specification.

Product Configuration System



Crystal Oscillators - SPXO

Discontinued

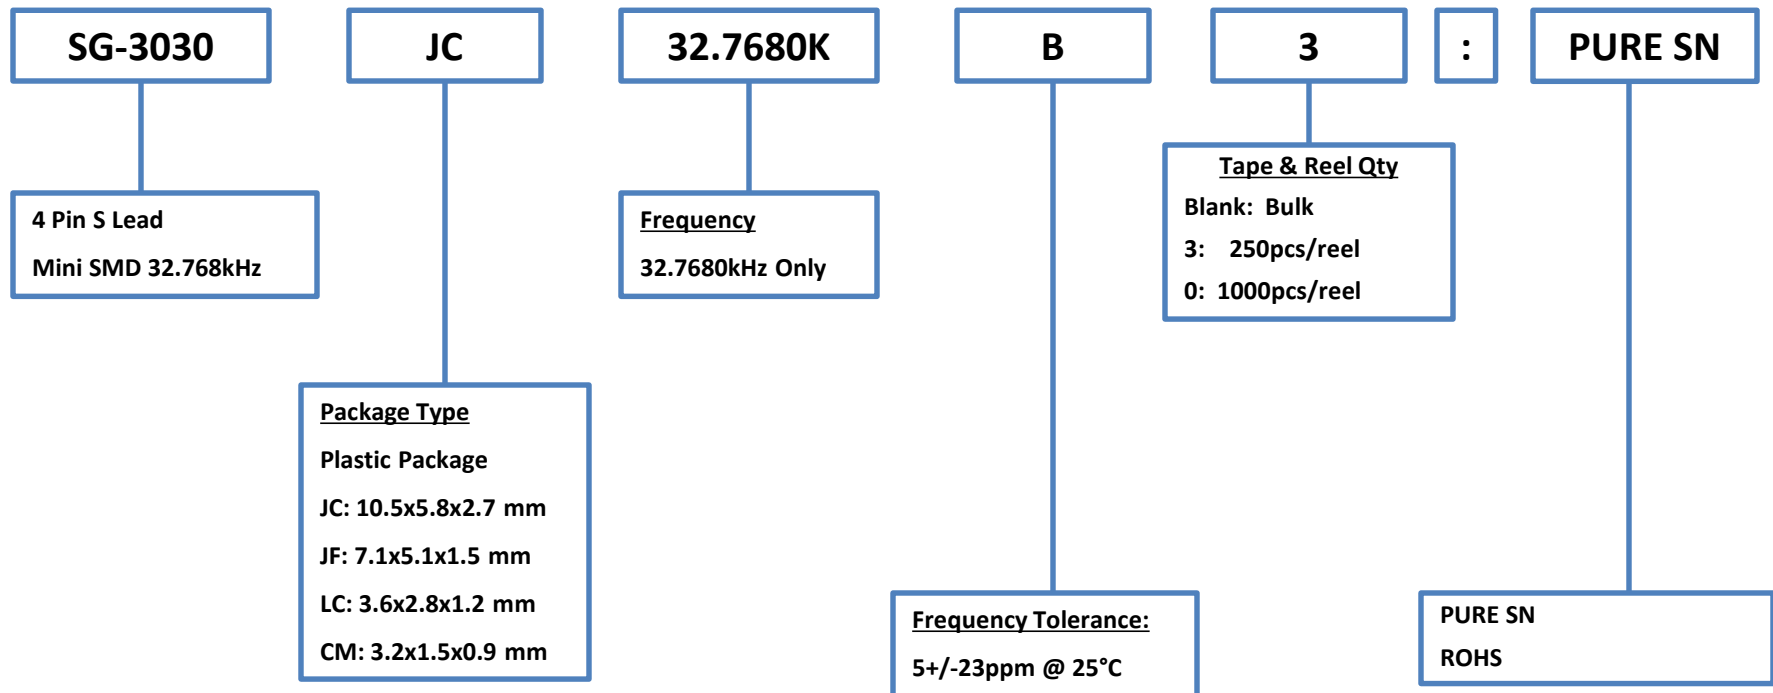

Note: All LC packages are RoHS Compliant, Pure SN

EPSON


June, 2021

Product Configuration System



Crystal Oscillators - SPXO

Discontinued

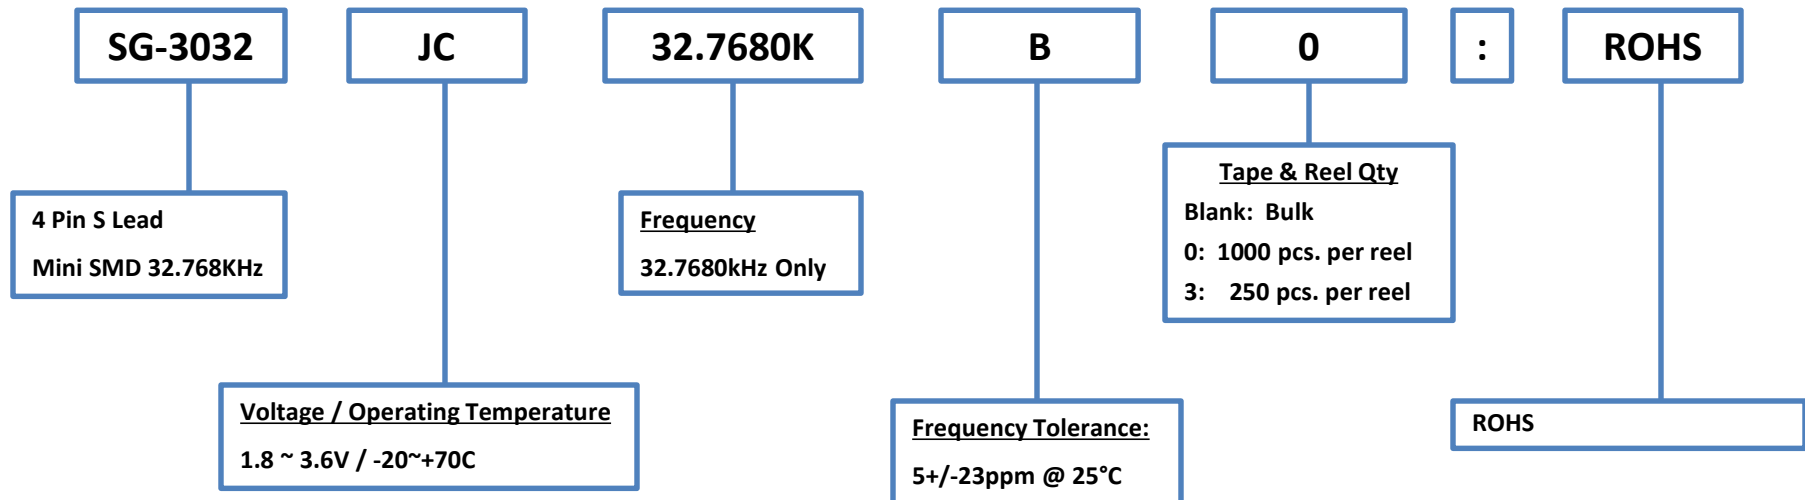

EPSON


June, 2021

Product Configuration System



Crystal Oscillators - SPXO

Discontinued

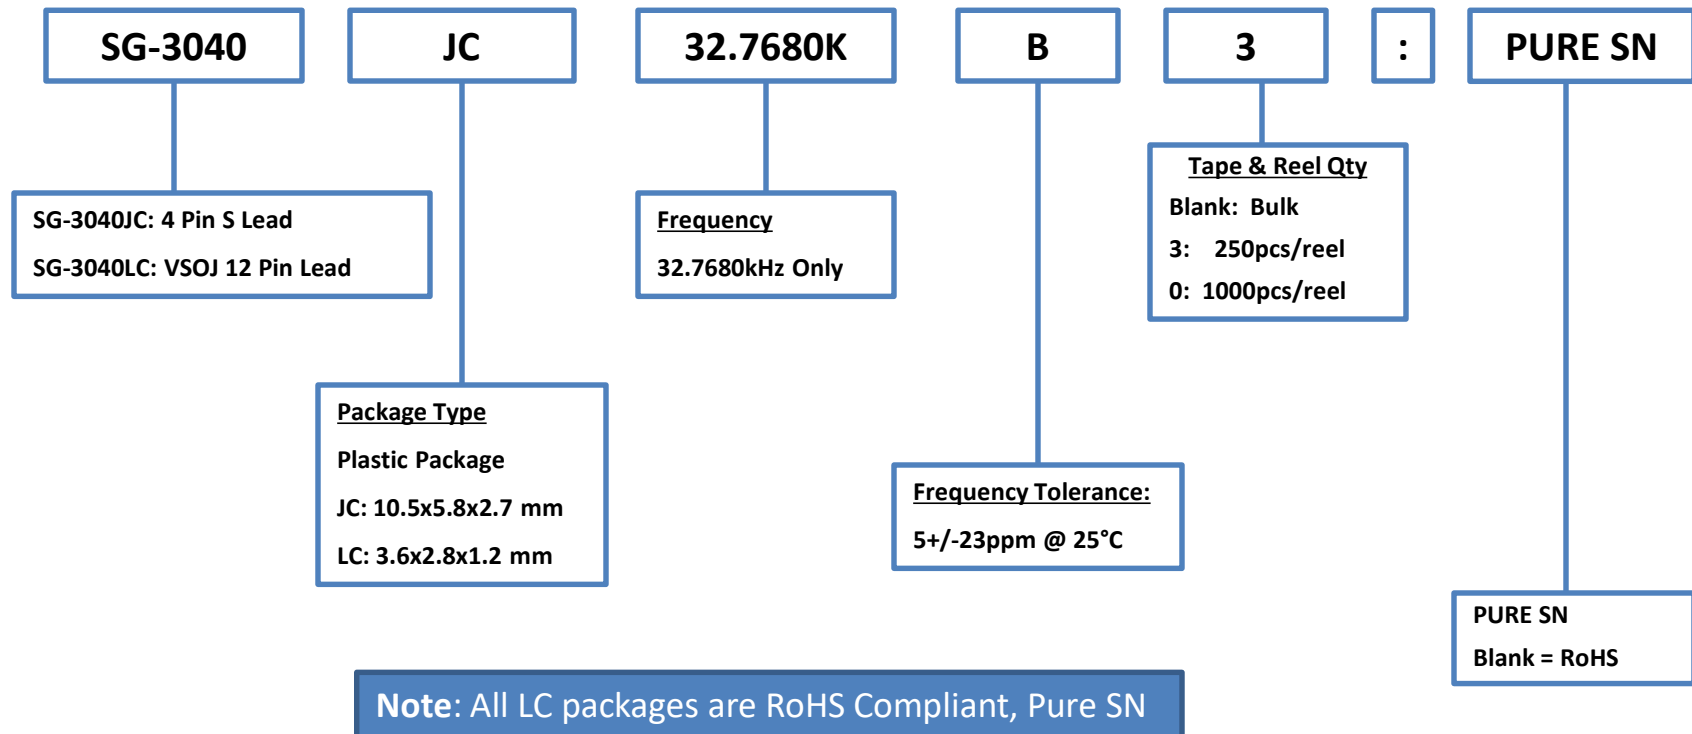

EPSON


June, 2021

Product Configuration System



Crystal Oscillators - SPXO

Discontinued

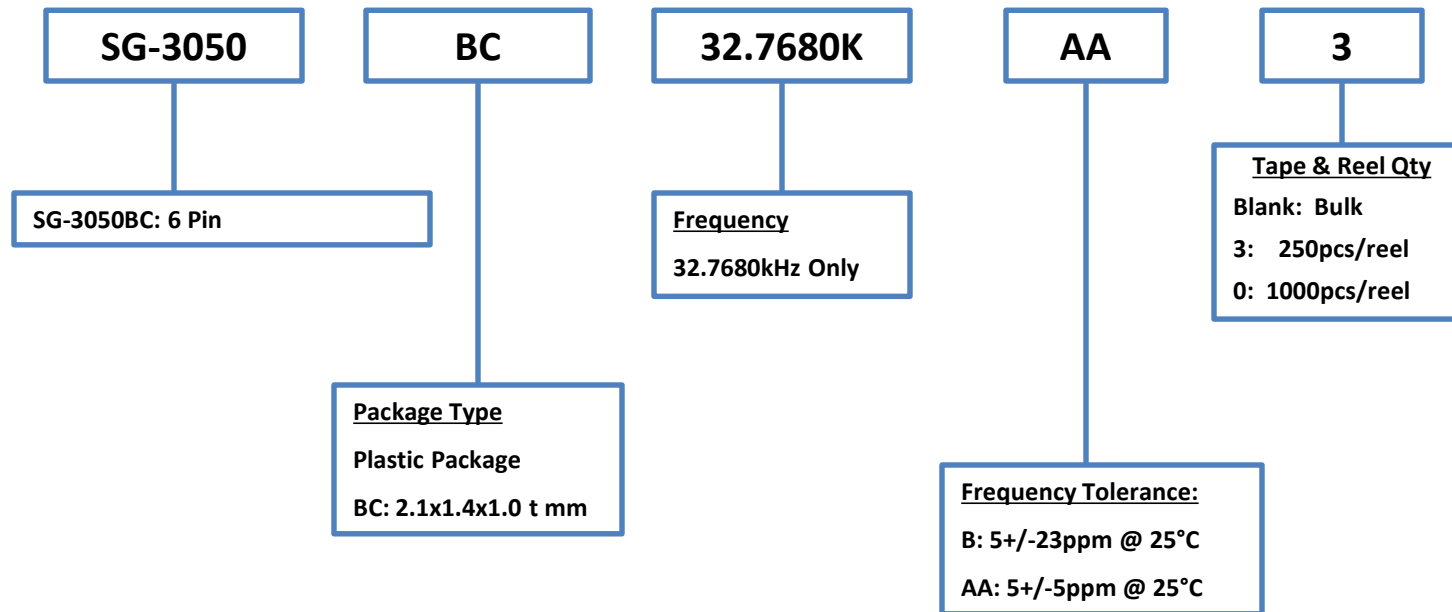

EPSON


June, 2021

Product Configuration System



Crystal Oscillators - SPXO

Discontinued

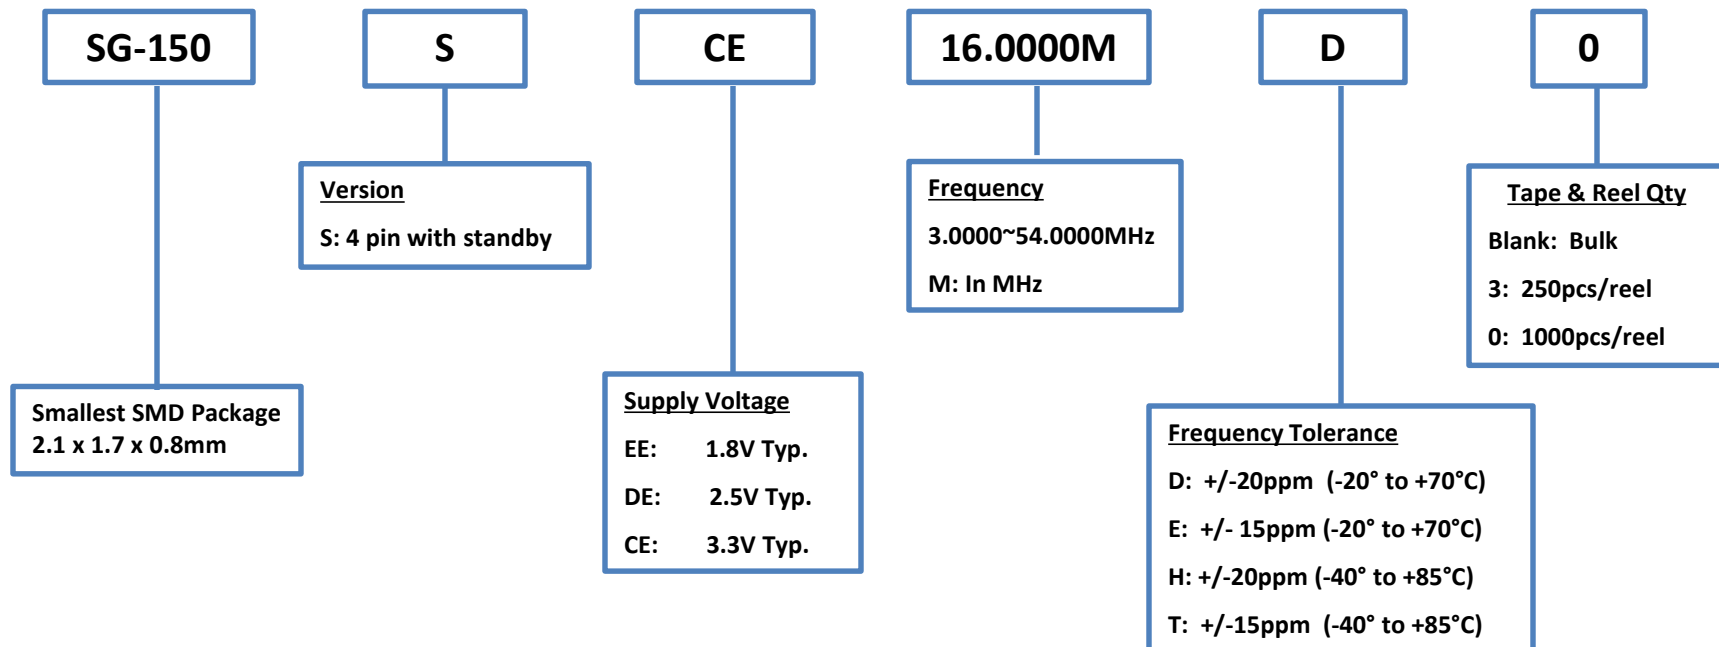

EPSON


June, 2021

Product Configuration System



Crystal Oscillators - SPXO

Discontinued

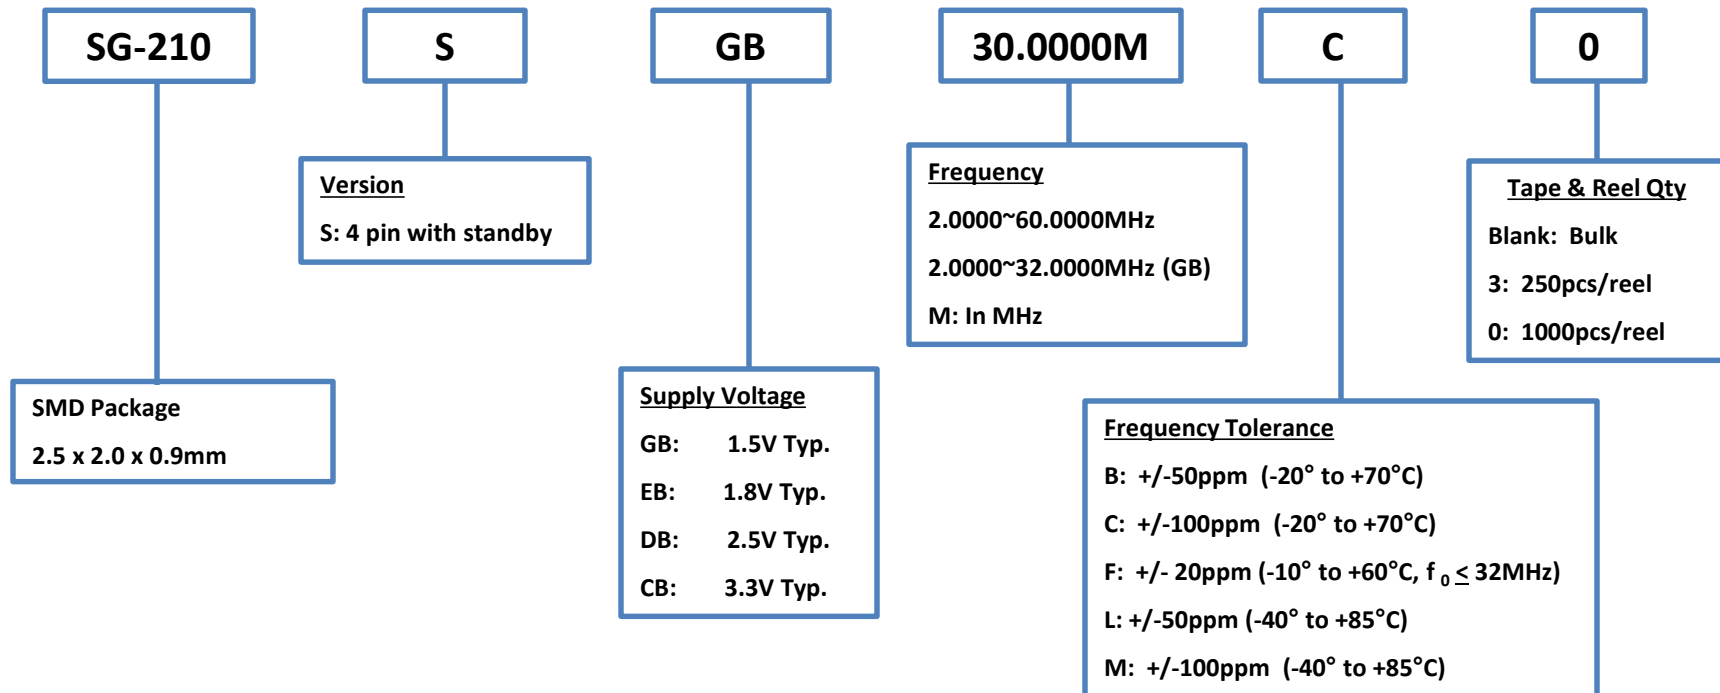

EPSON


June, 2021

Product Configuration System



Crystal Oscillators - SPXO

Discontinued

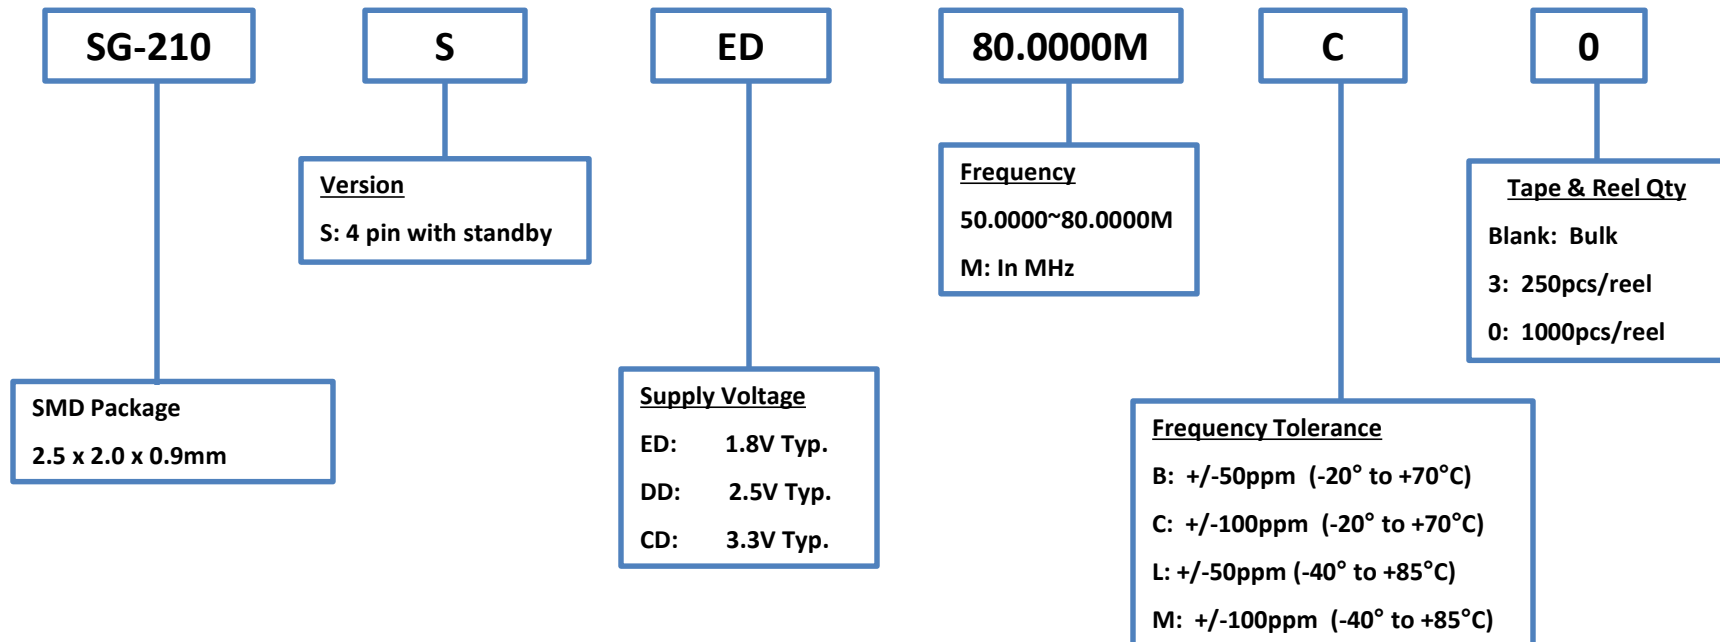

EPSON


June, 2021

Product Configuration System



Crystal Oscillators - SPXO

Discontinued

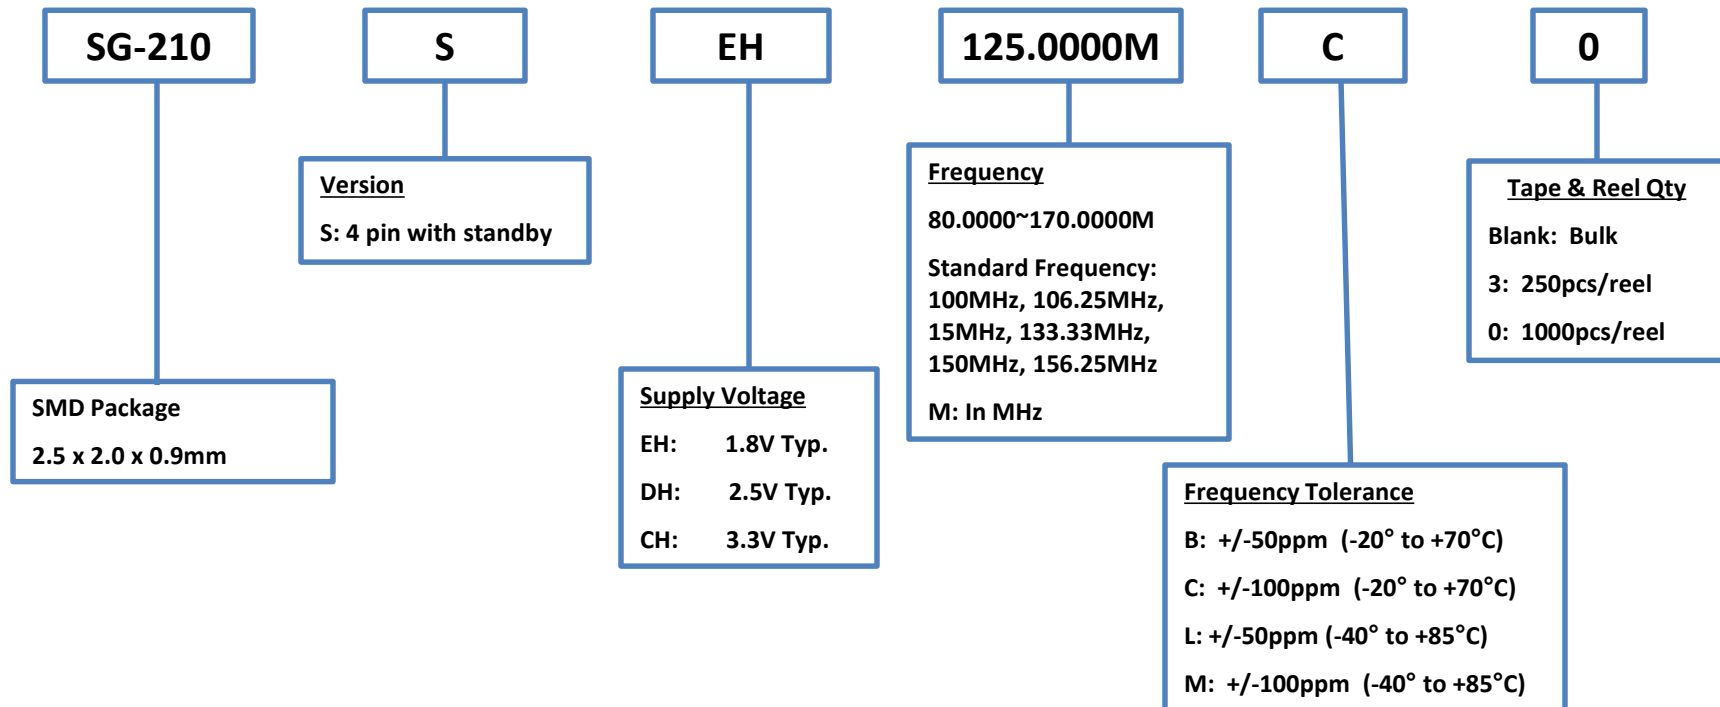


EPSON

June, 2021

Product Configuration System



Crystal Oscillators - SPXO

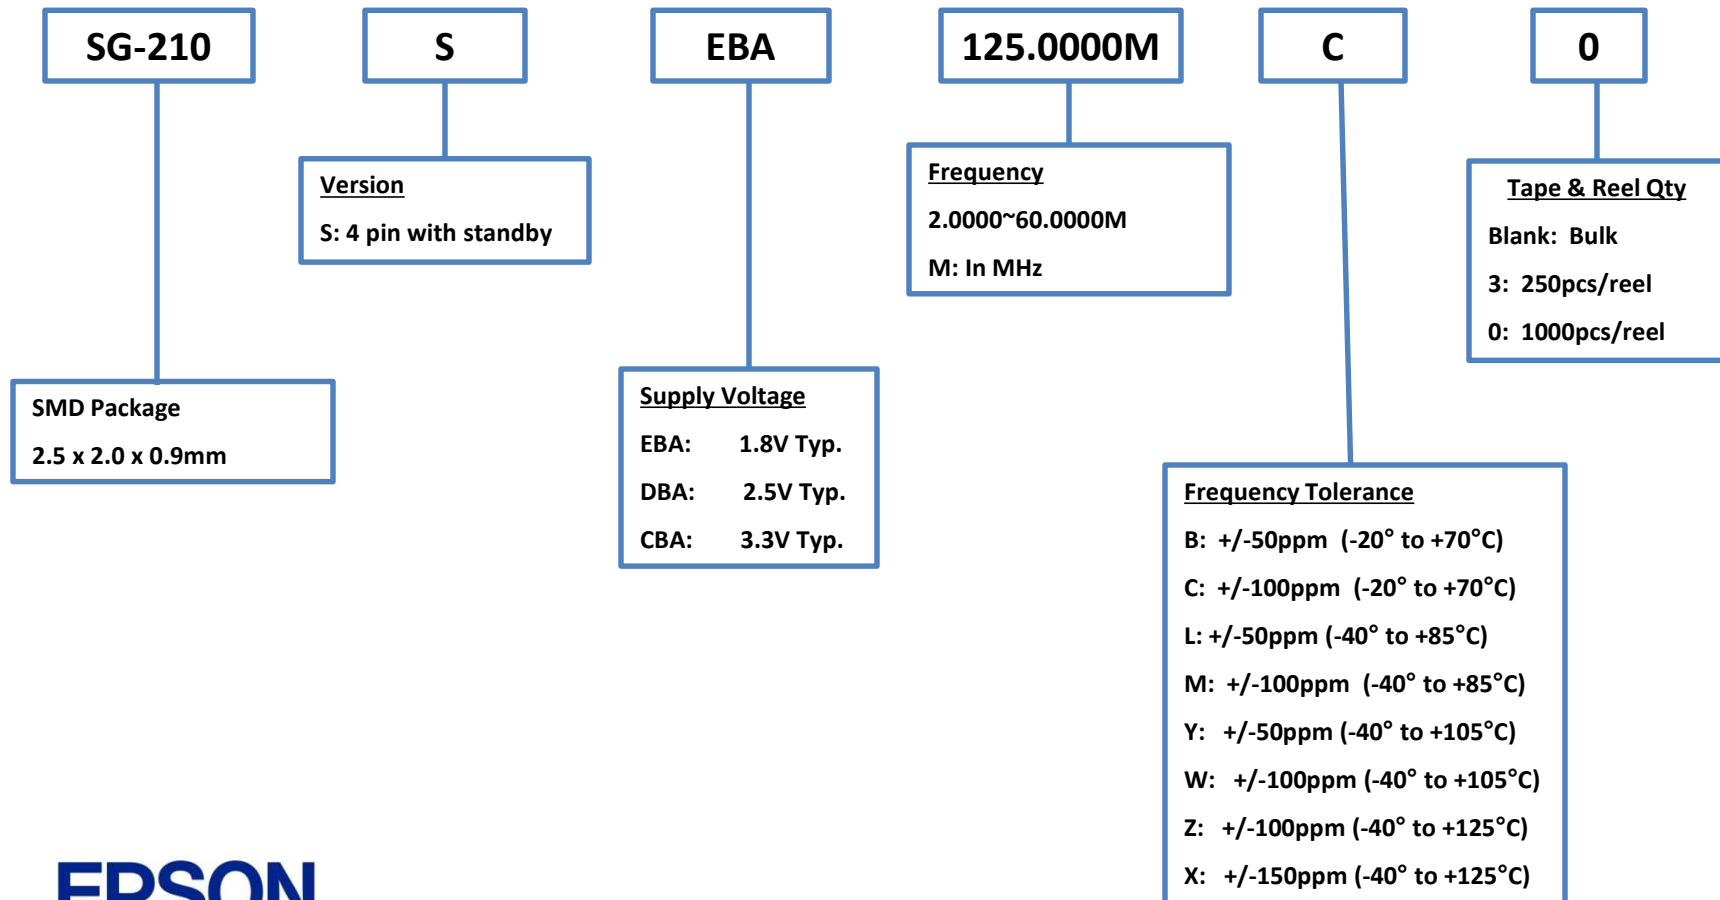

EPSON


June, 2021

Product Configuration System



Crystal Oscillators - SPXO

Discontinued

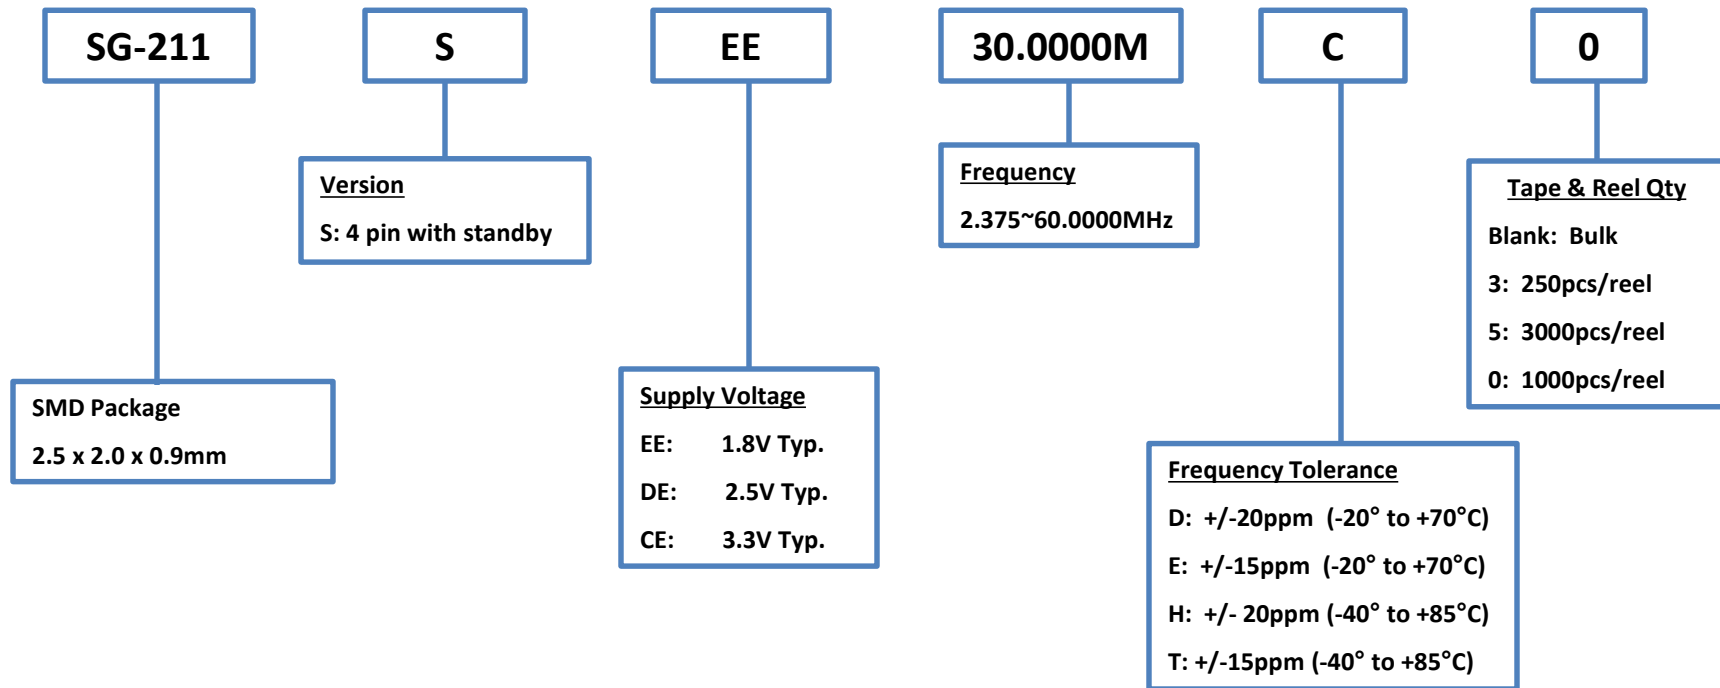


Product Configuration System



Crystal Oscillators - SPXO

Discontinued

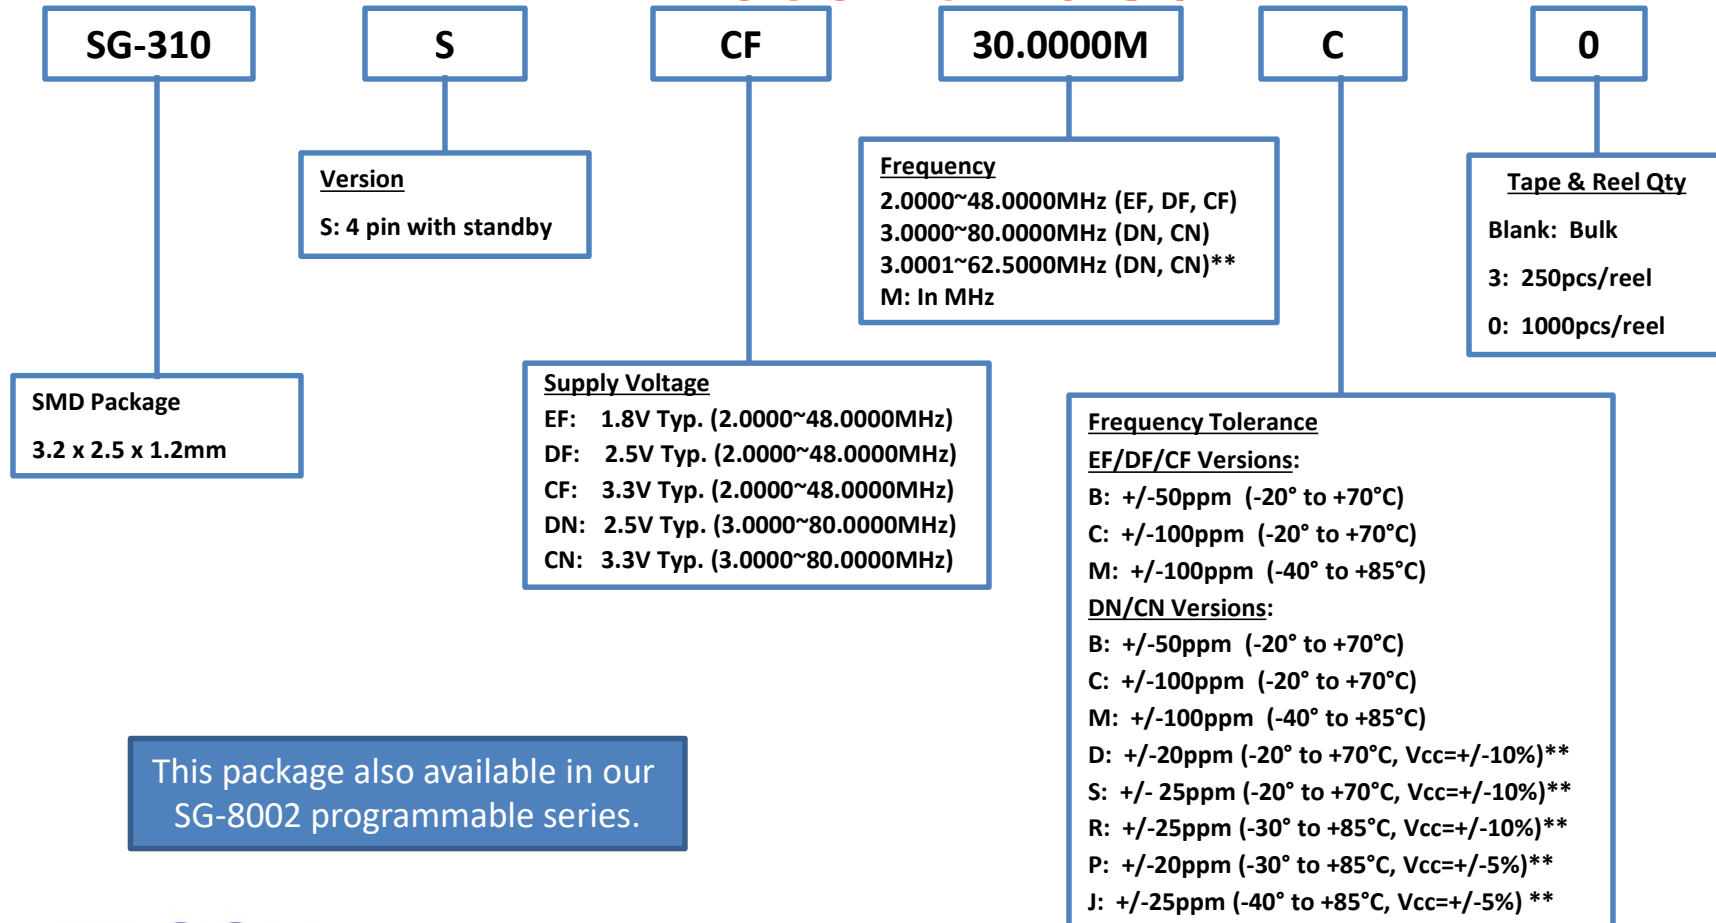


EPSON

Product Configuration System



Crystal Oscillators - SPXO

Discontinued

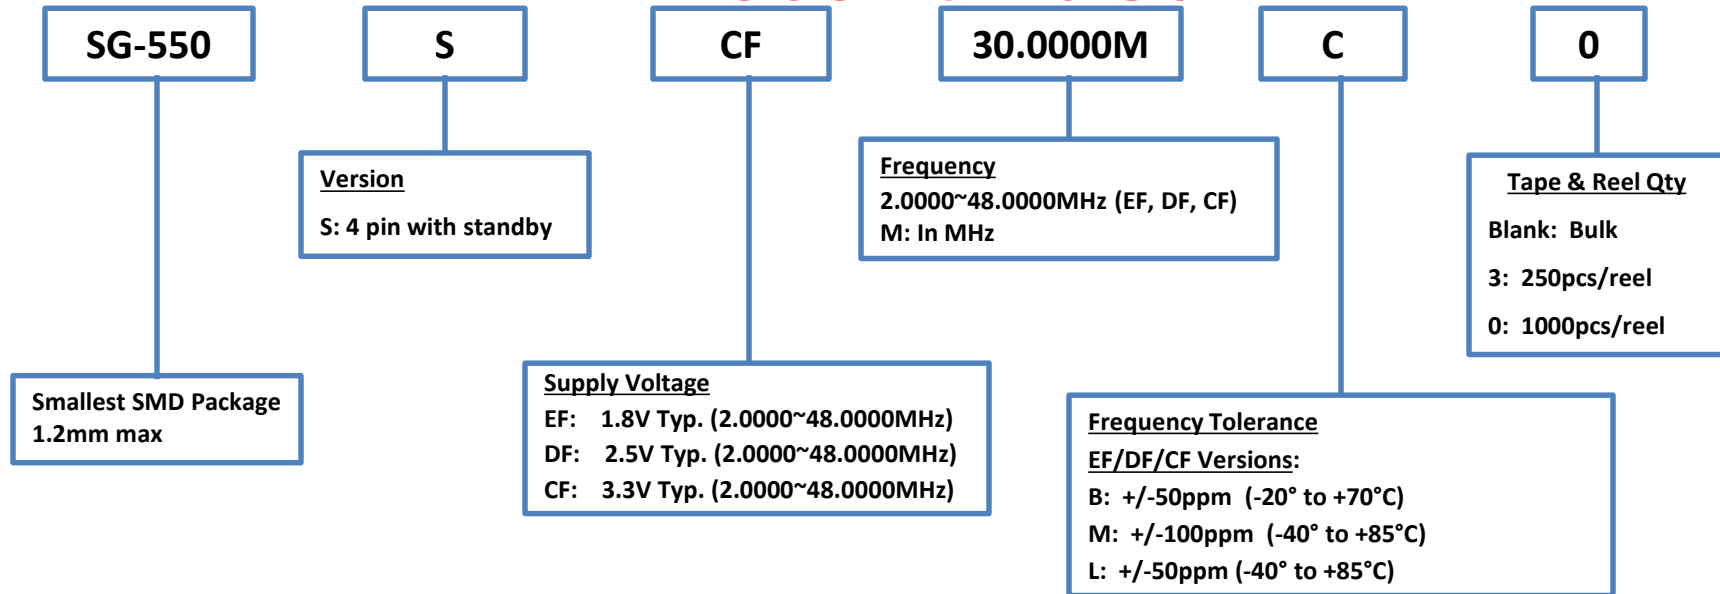

This package also available in our SG-8002LB programmable series.

EPSON

June, 2021


45

Product Configuration System



Crystal Oscillators - SPXO

Discontinued

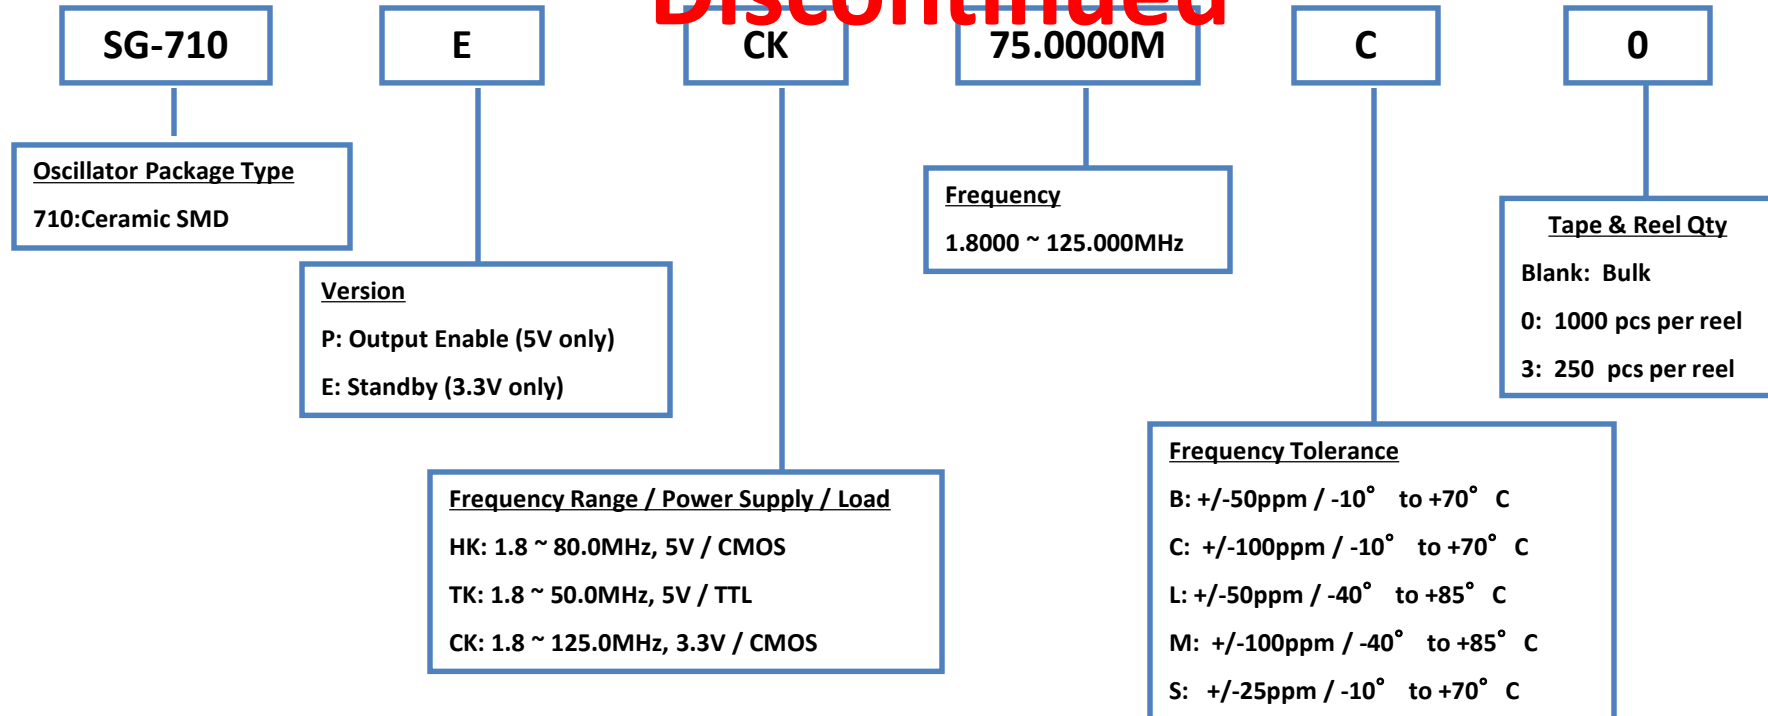

These packages also available in our SG-8002 programmable series.

EPSON


June, 2021

Product Configuration System



Crystal Oscillators - SPXO

Discontinued

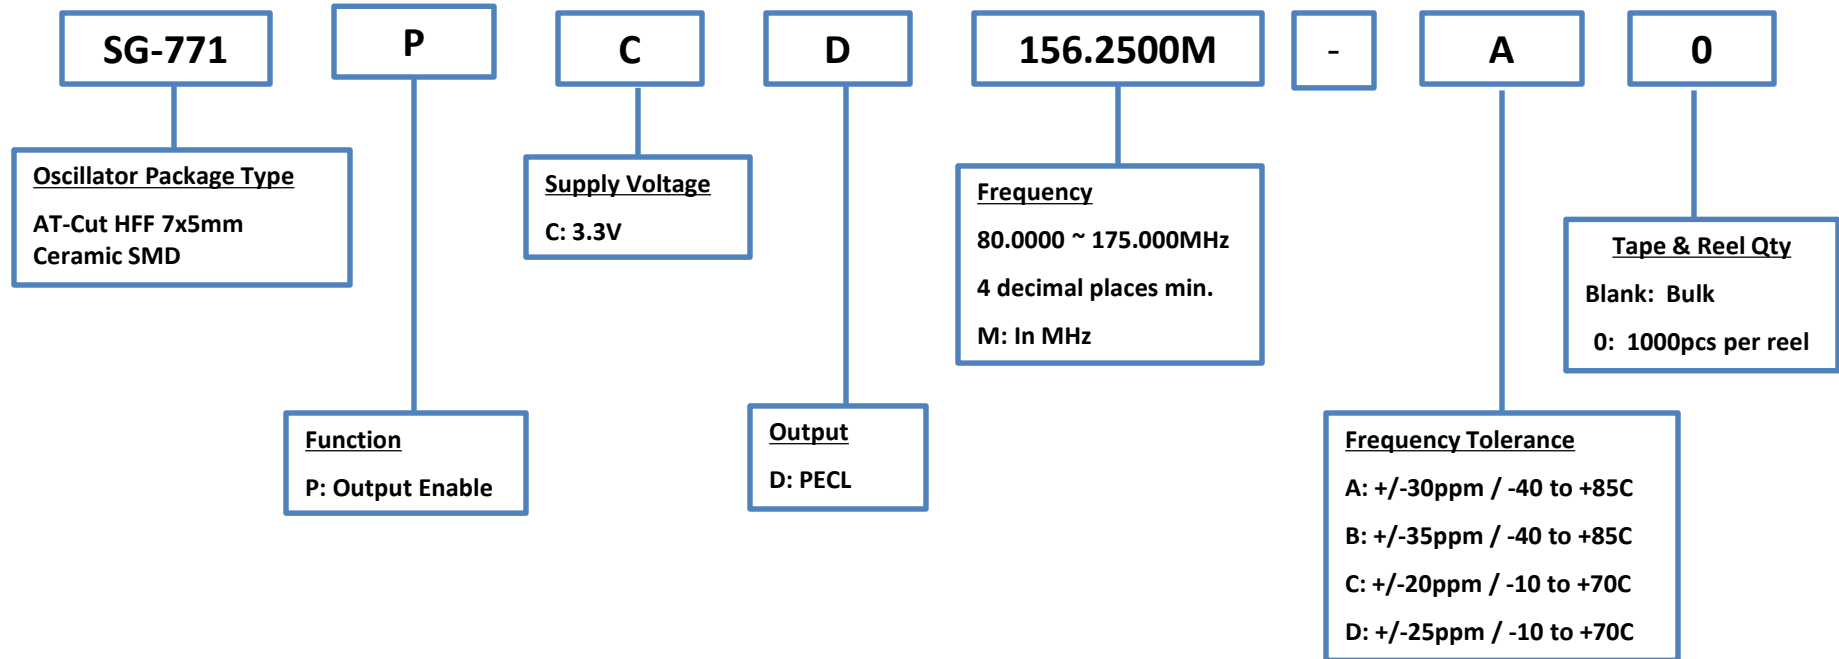


Product Configuration System



Crystal Oscillators - SPXO


Discontinued

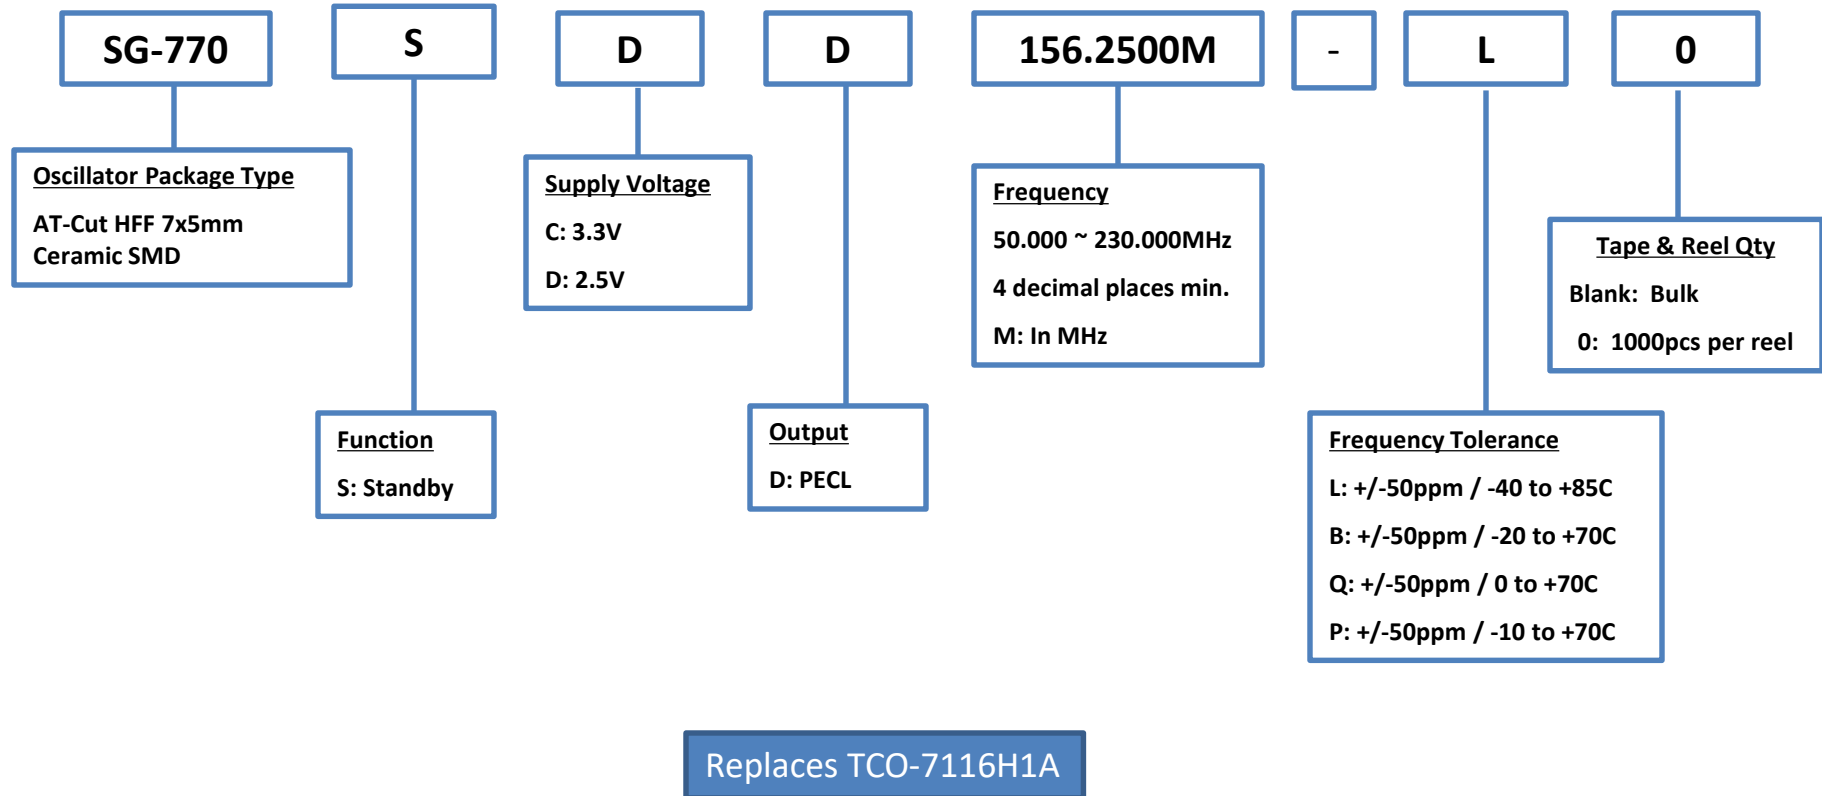

Product Configuration System



Crystal Oscillators - SPXO

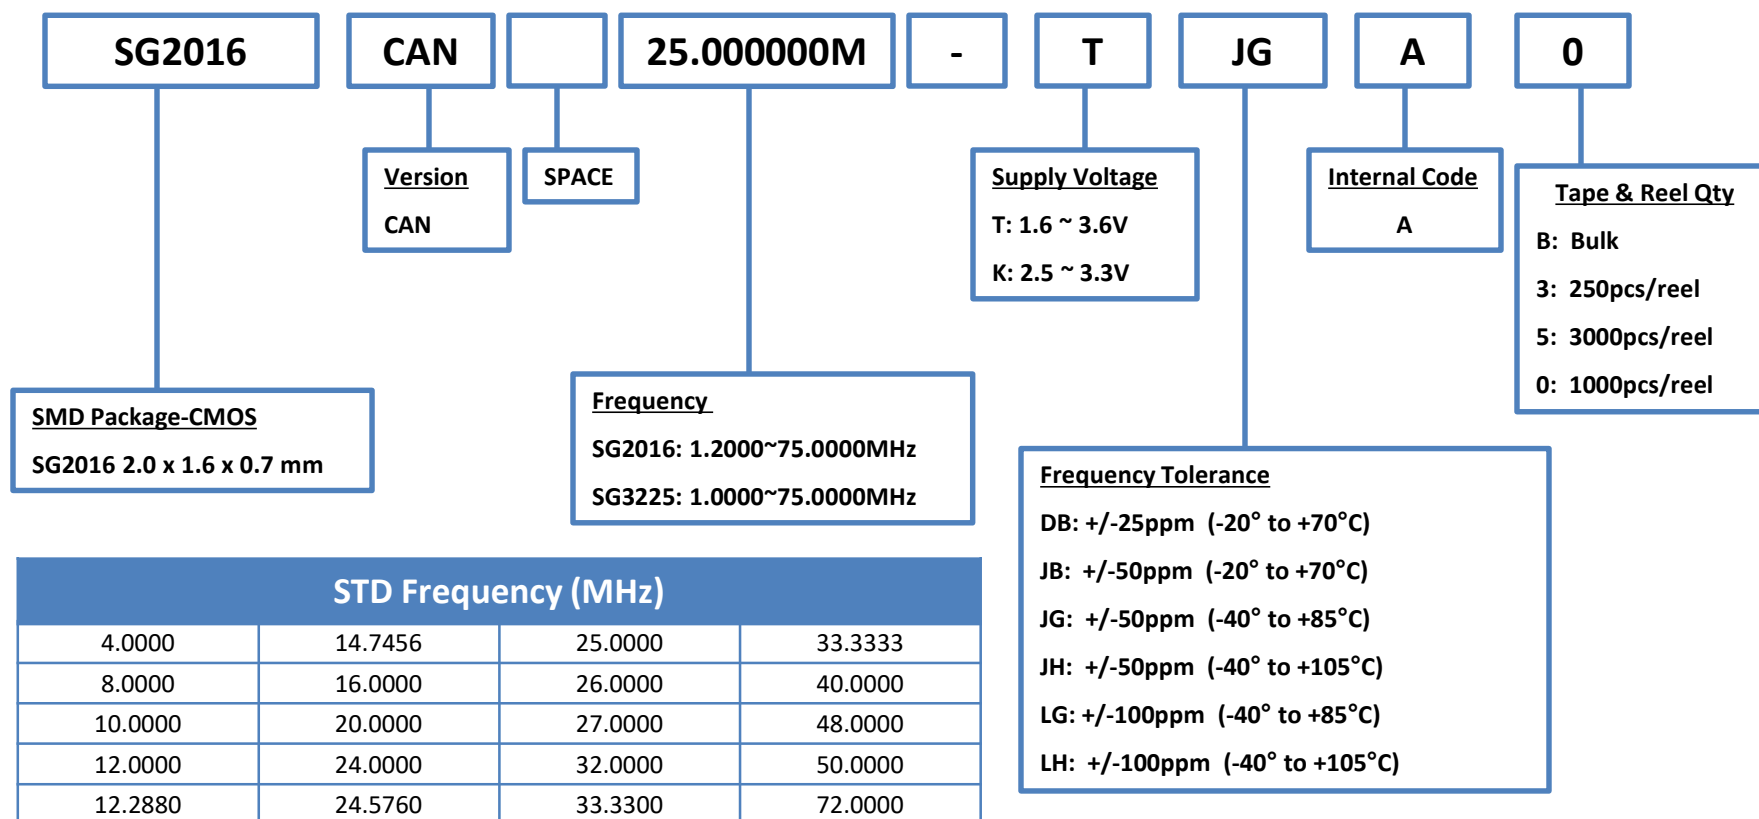

EPSON


June, 2021

Product Configuration System



Crystal Oscillators – SPXO, Automotive

(Conforms to AECQ Requirement)

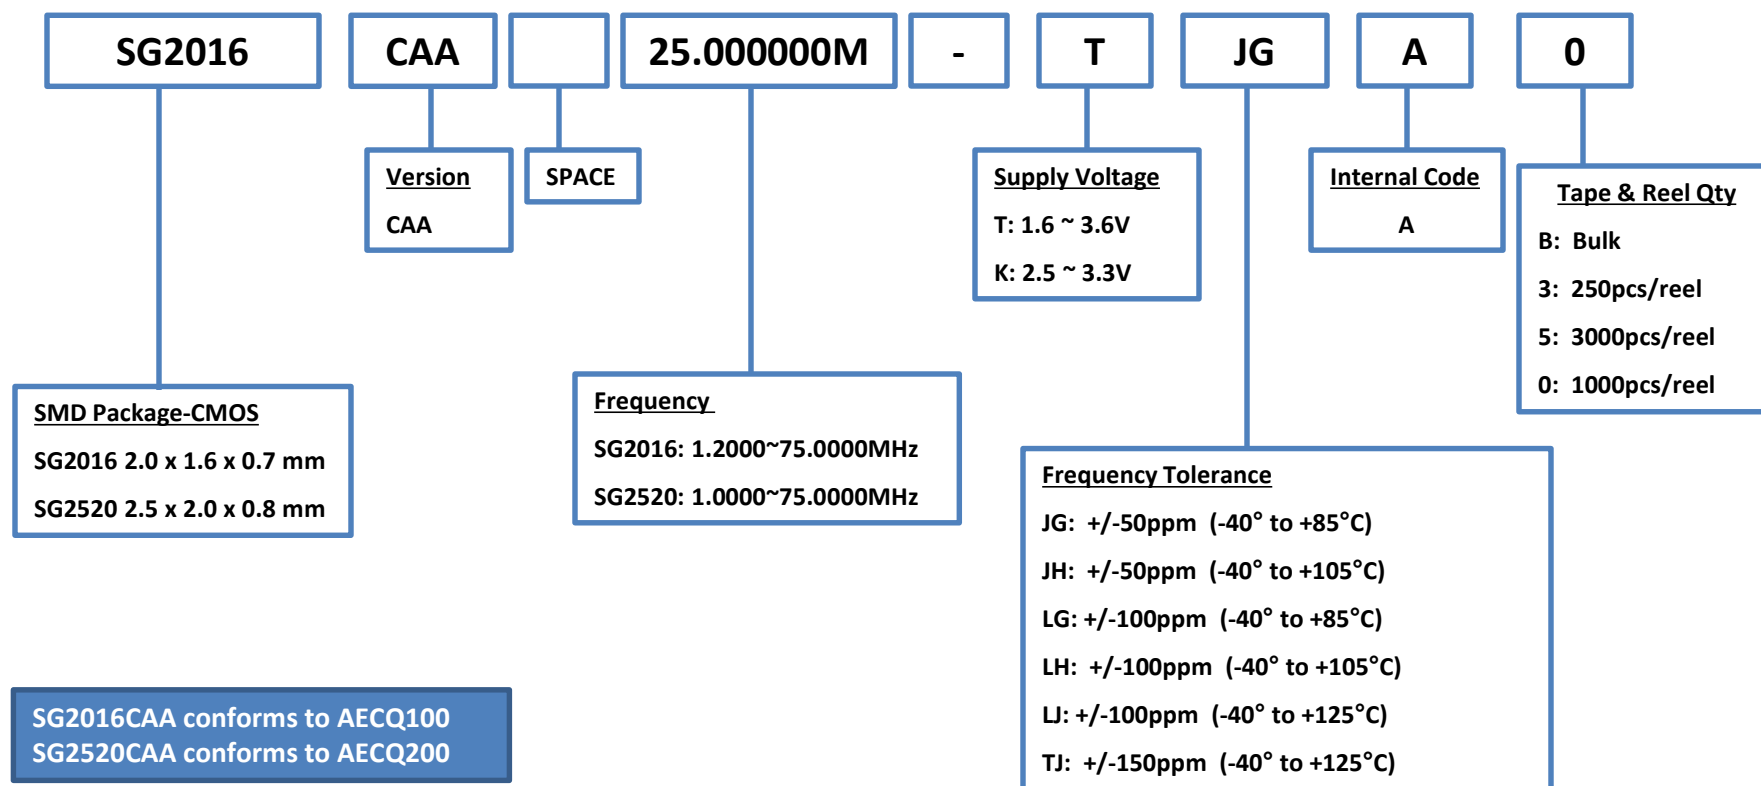

EPSON


June, 2021

Example: SG2016CAA 25.0000M-TJGA
Please contact us about available frequencies

Product Configuration System



Crystal Oscillators - SPXO

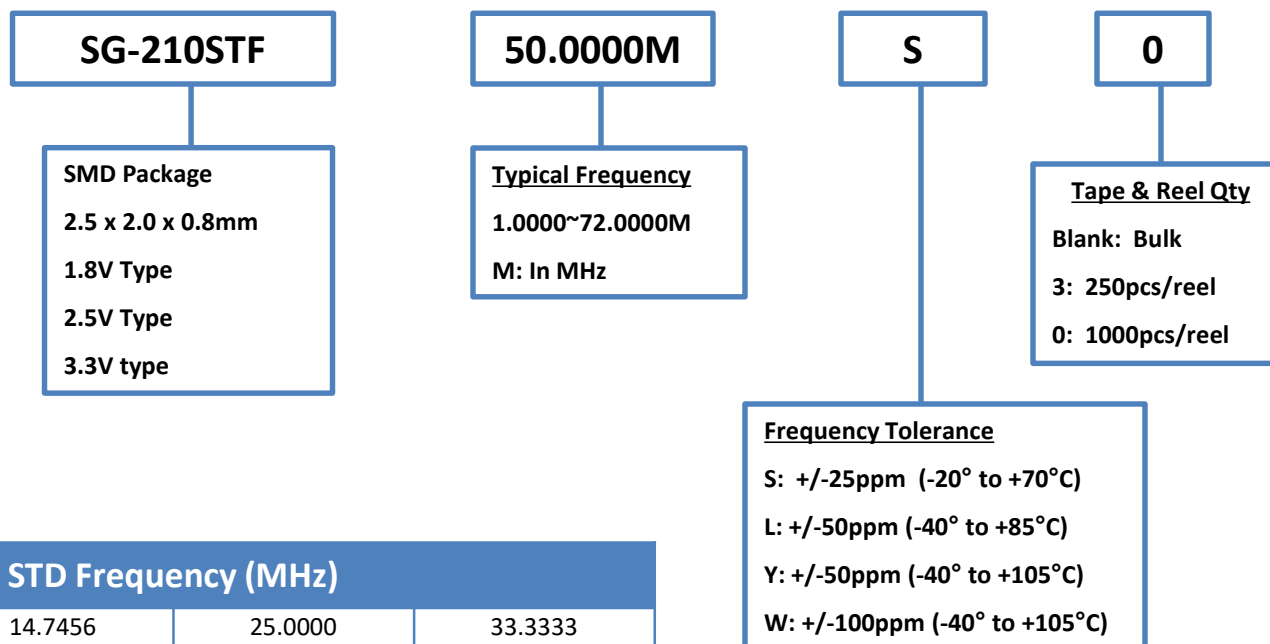

STD Frequency (MHz)			
4.0000	14.7456	25.0000	33.3333
8.0000	16.0000	26.0000	40.0000
10.0000	20.0000	27.0000	48.0000
12.0000	24.0000	32.0000	50.0000
12.2880	24.5760	33.3300	72.0000

EPSON


June, 2021

For non-standard frequencies, please see SG-8018CG

Product Configuration System



Crystal Oscillators - SPXO

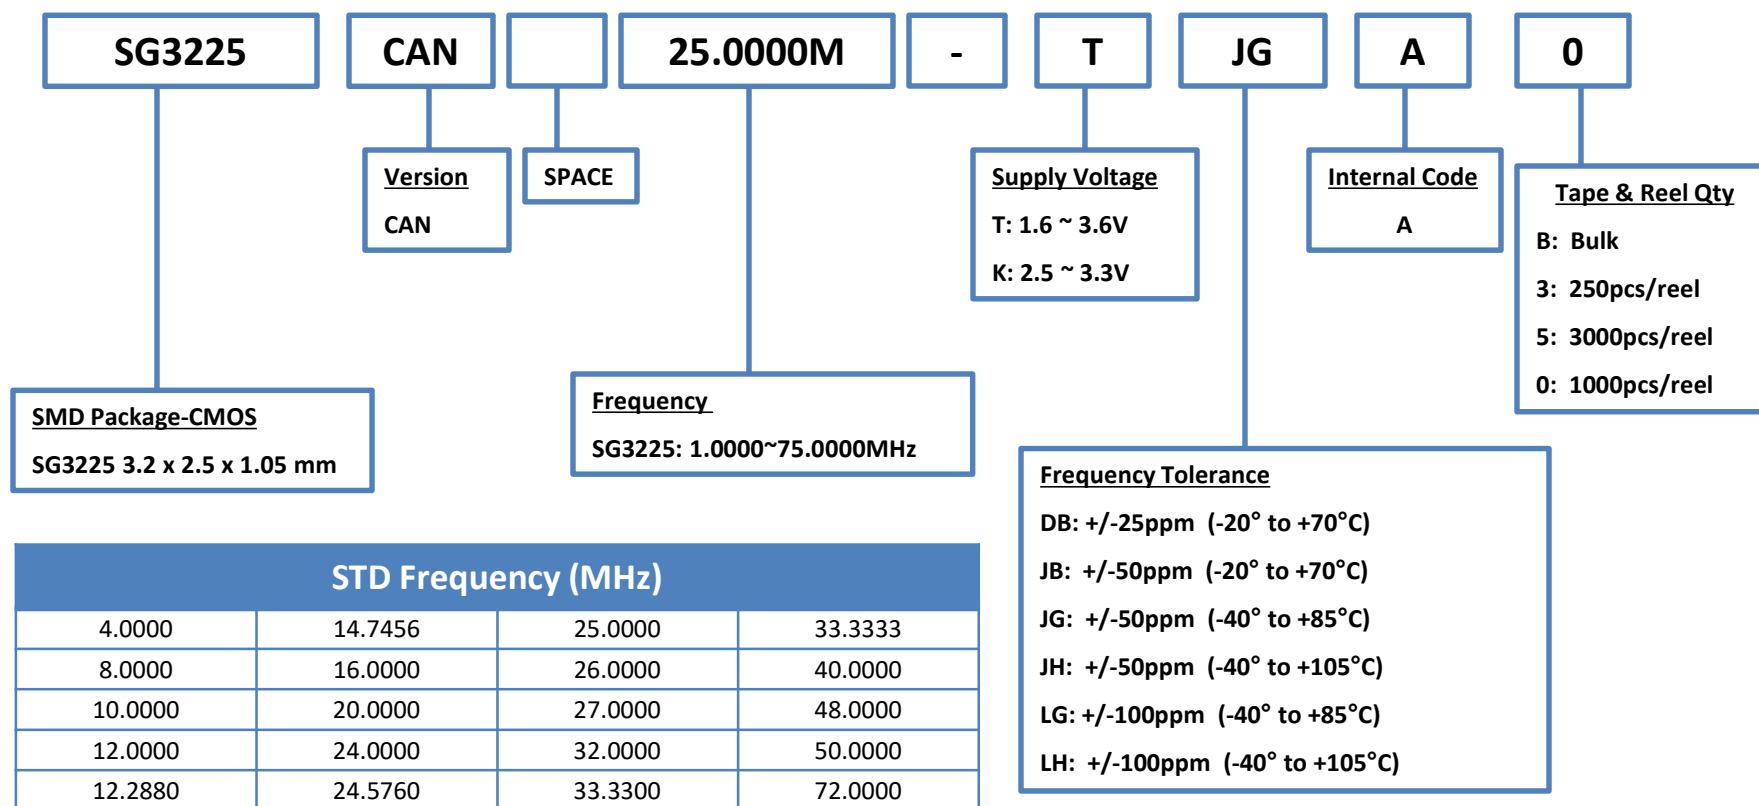

EPSON

June, 2021


Example: SG3225CAN 25.0000M-TJGA

For non-standard frequencies, please see SG-8018CE

Product Configuration System



Crystal Oscillators - SPXO

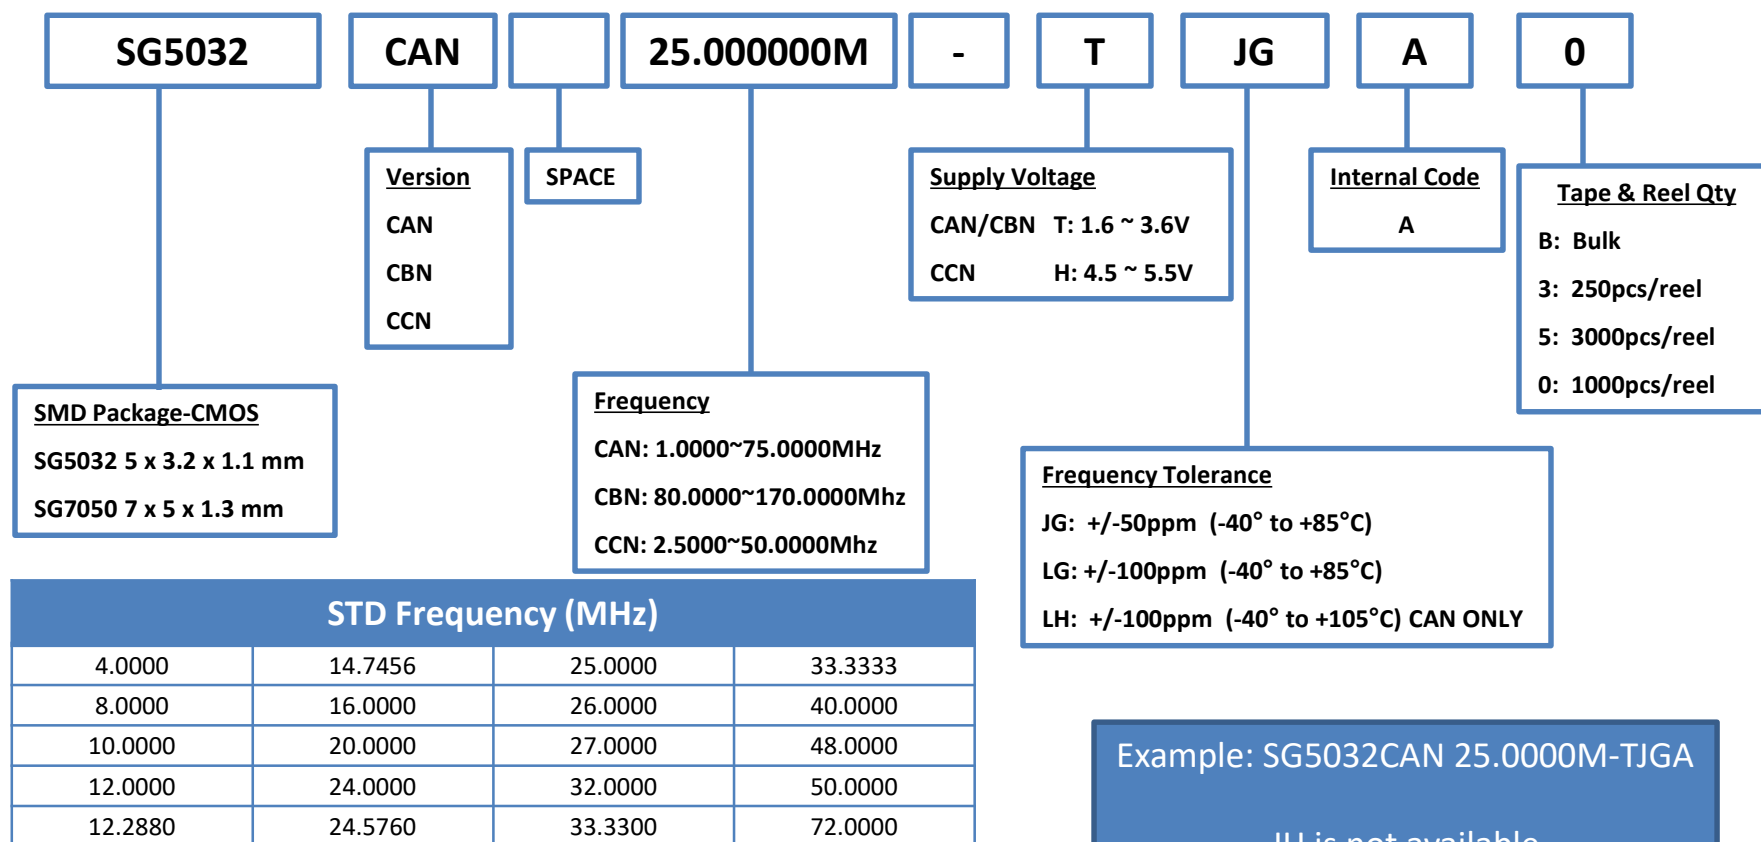

EPSON


June, 2021

For non-standard frequencies, please see SG-8018

Product Configuration System



Crystal Oscillators - SPXO

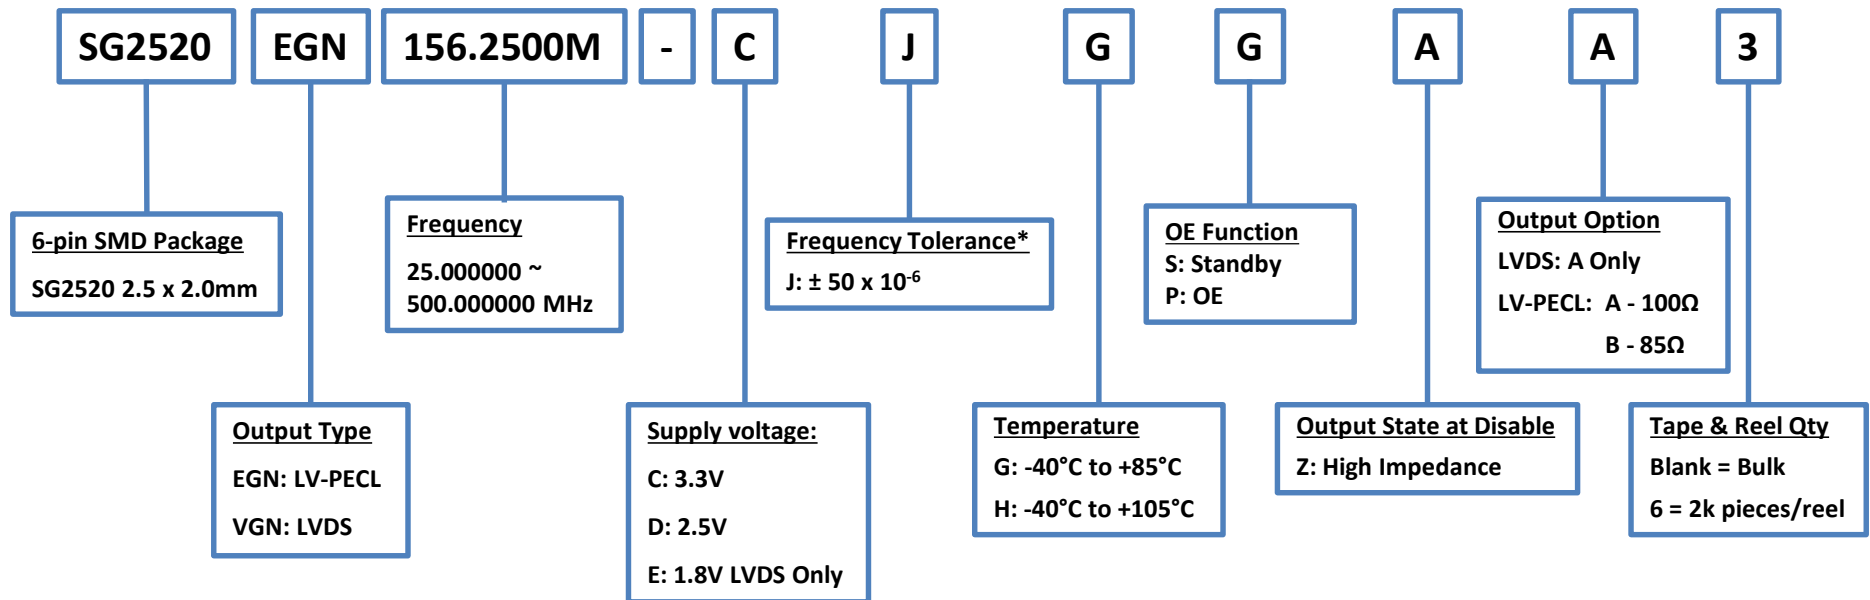

* Please contact SEC for availability for a given temperature range


EPSON

Note: All packages are RoHS Compliant

Product Configuration System



Crystal Oscillators - SPXO

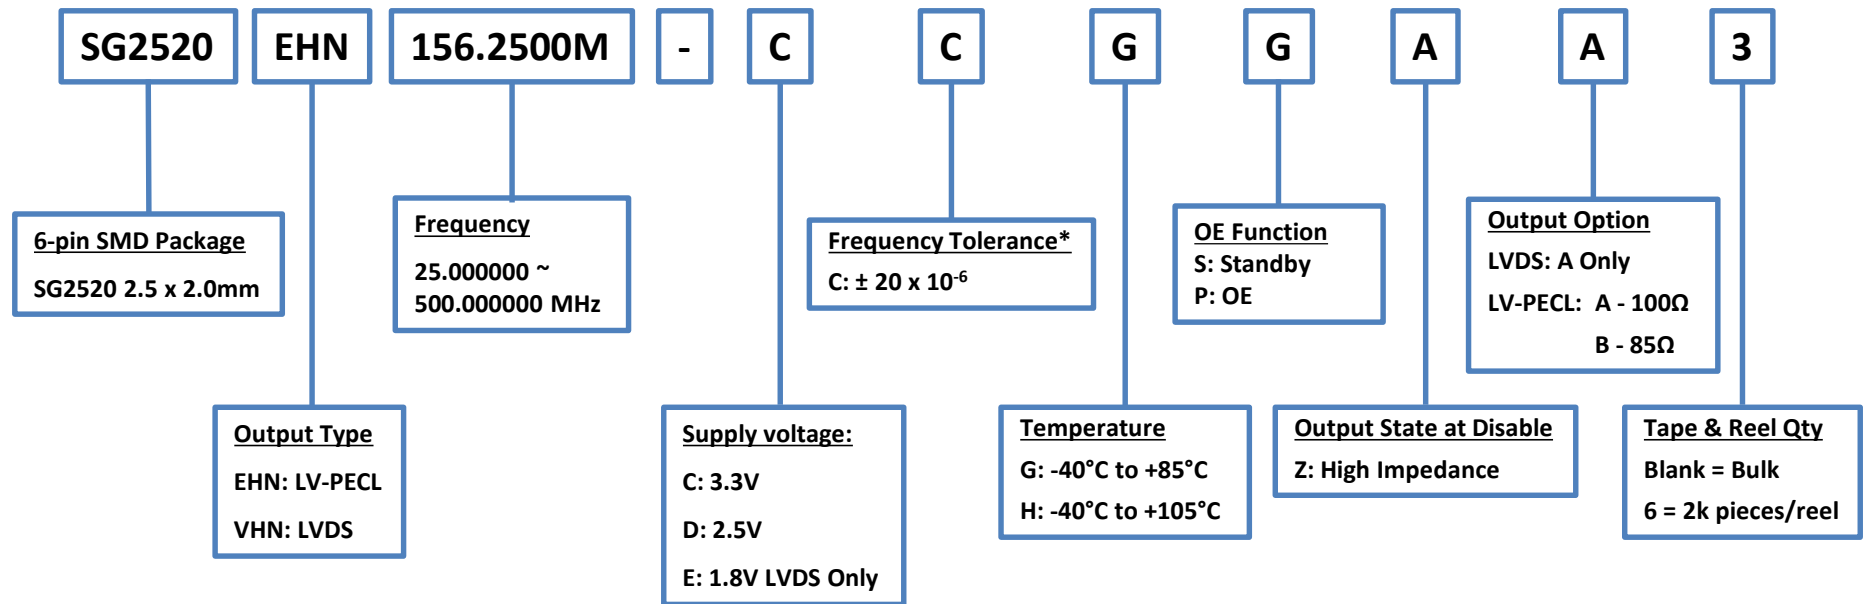

* Please contact SEC for availability for a given temperature range


EPSON

Note: All packages are RoHS Compliant

Product Configuration System



Crystal Oscillators - SPXO

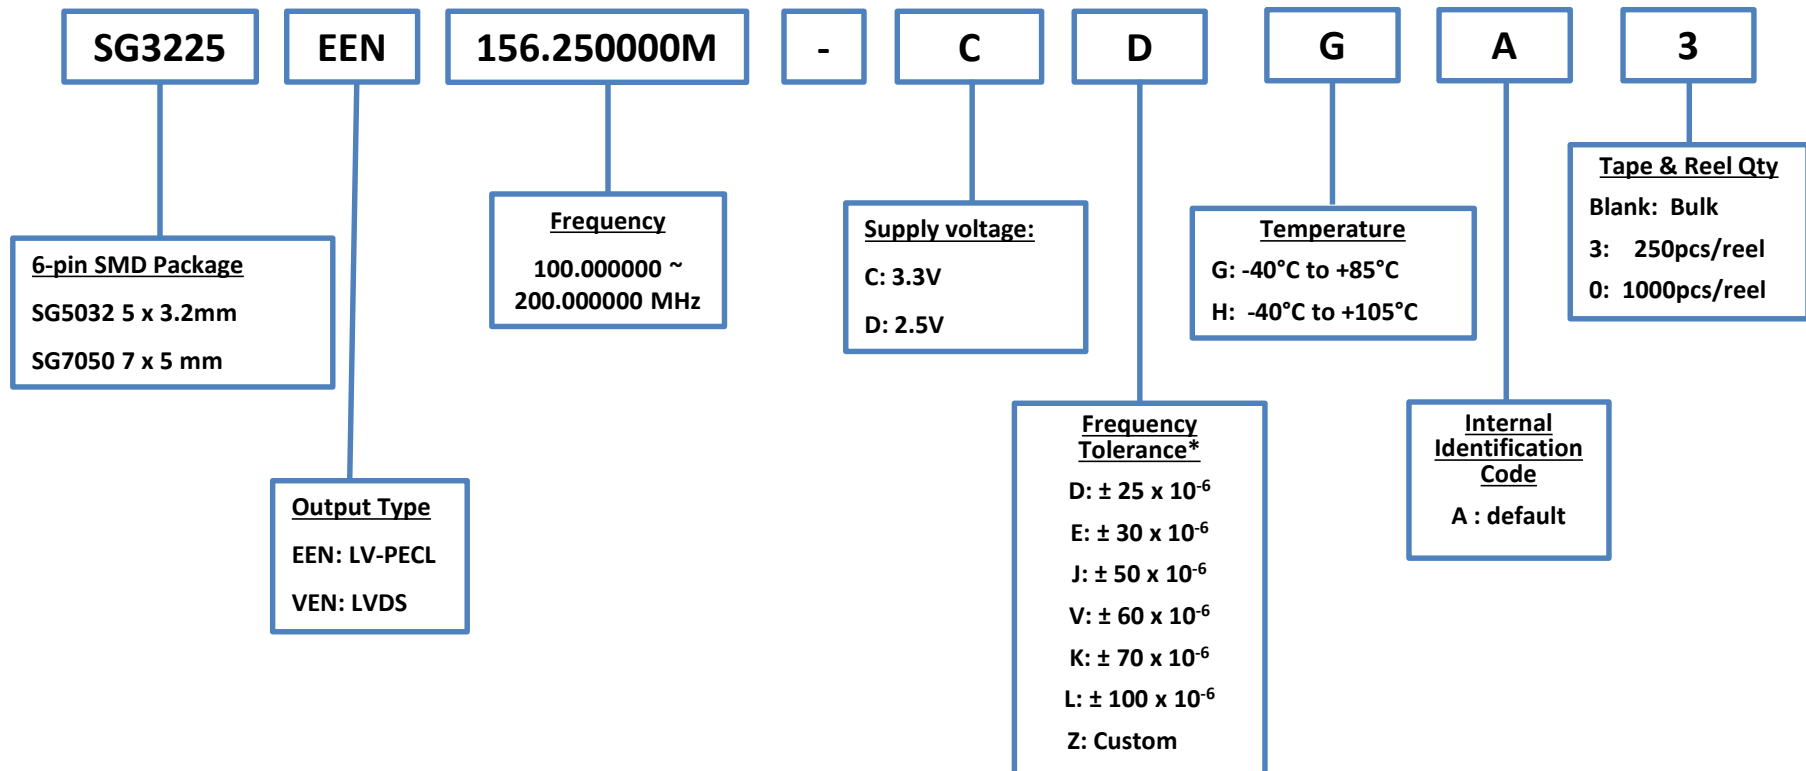

* Please contact SEC for availability for a given temperature range


EPSON

Note: All packages are RoHS Compliant

Product Configuration System



Crystal Oscillators - SPXO

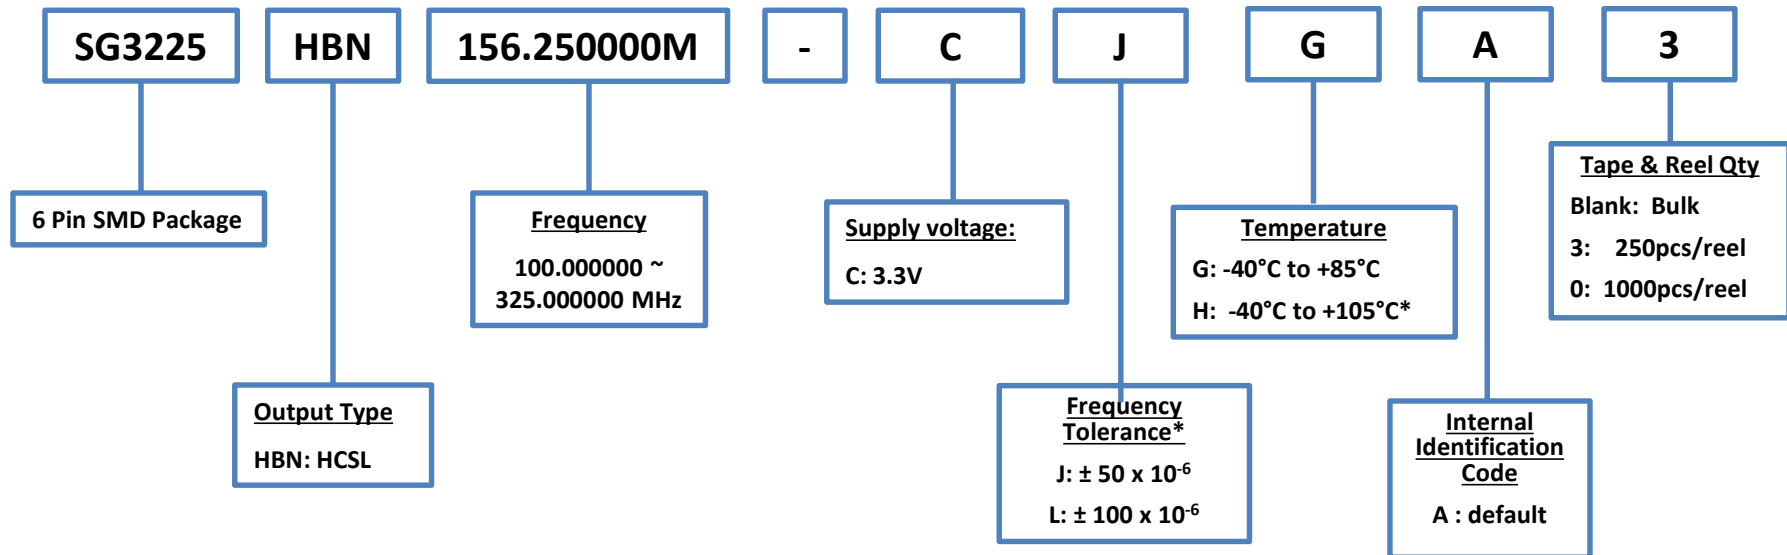

* Please contact SEC for availability for a given temperature range


EPSON

Note: All packages are RoHS Compliant
*For 105C, contact Epson

Product Configuration System



Crystal Oscillators - SPXO

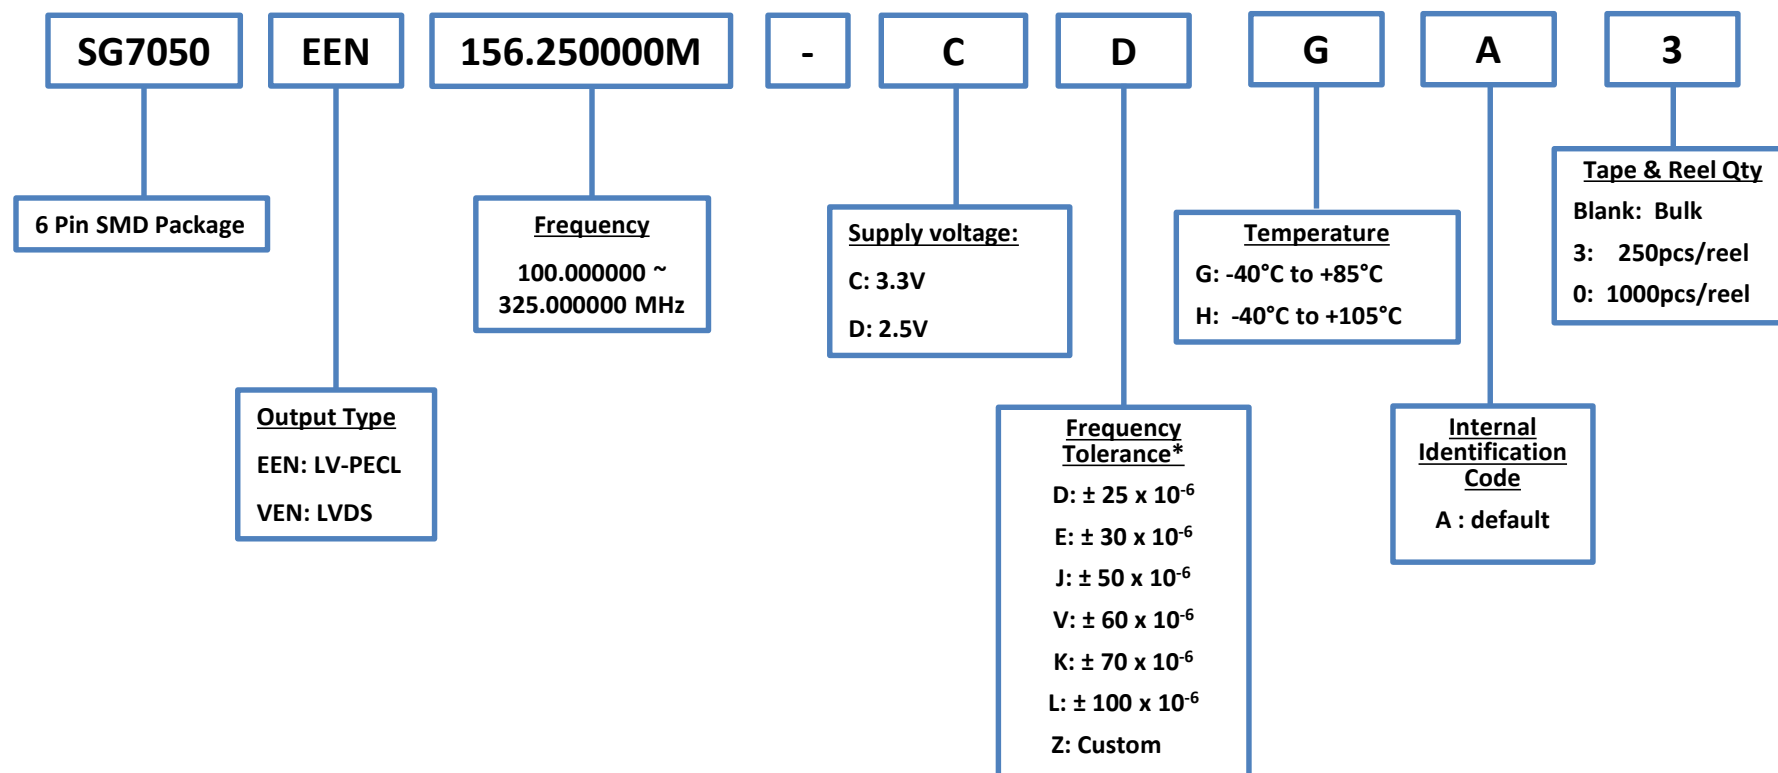

* Please contact SEC for availability for a given temperature range

EPSON


Note: All packages are RoHS Compliant

Product Configuration System



Crystal Oscillators – SPXO

Output : LV-PECL, LVDS

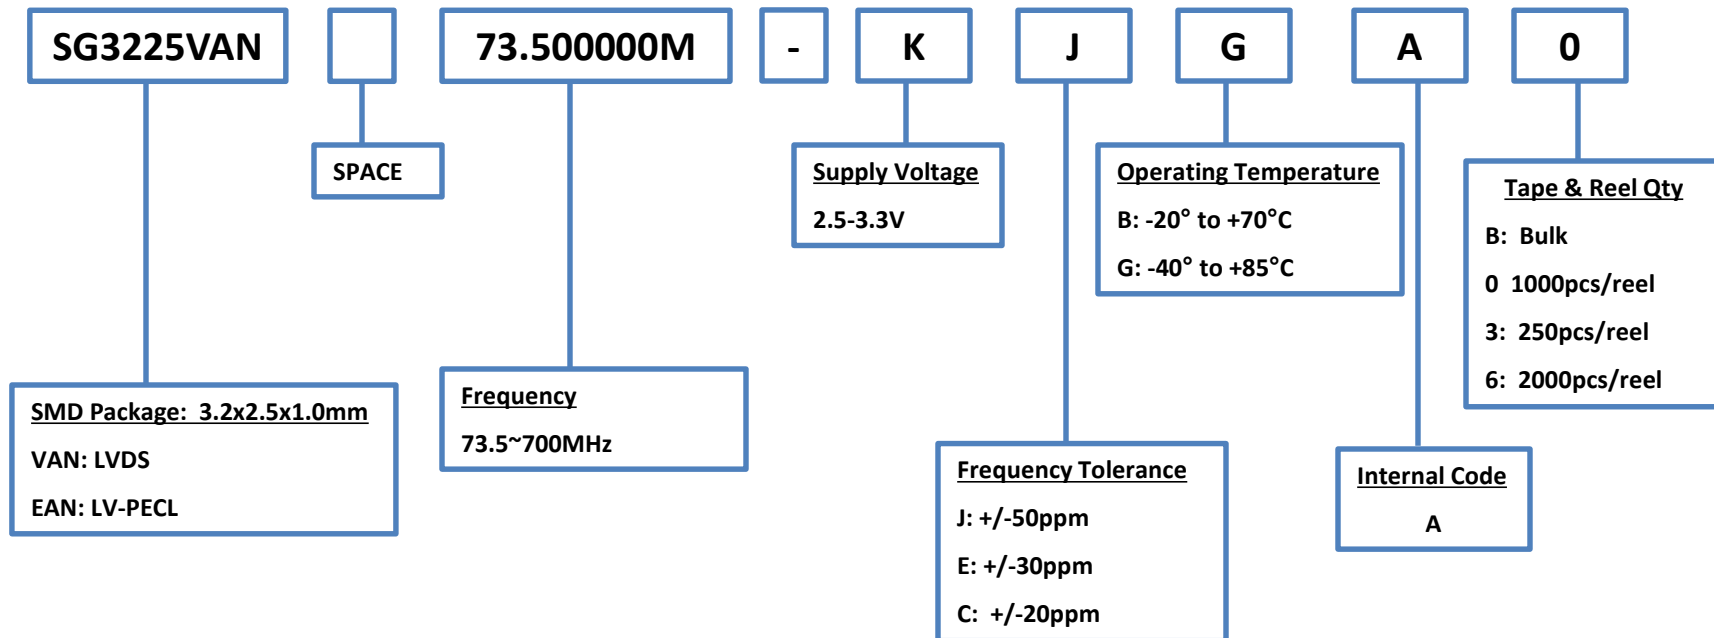

EPSON

June, 2021


Example: SG3225EAN 73.500000M-KJGA
CG is not available

Product Configuration System



Crystal Oscillators – SPXO

Output : LV-PECL, LVDS

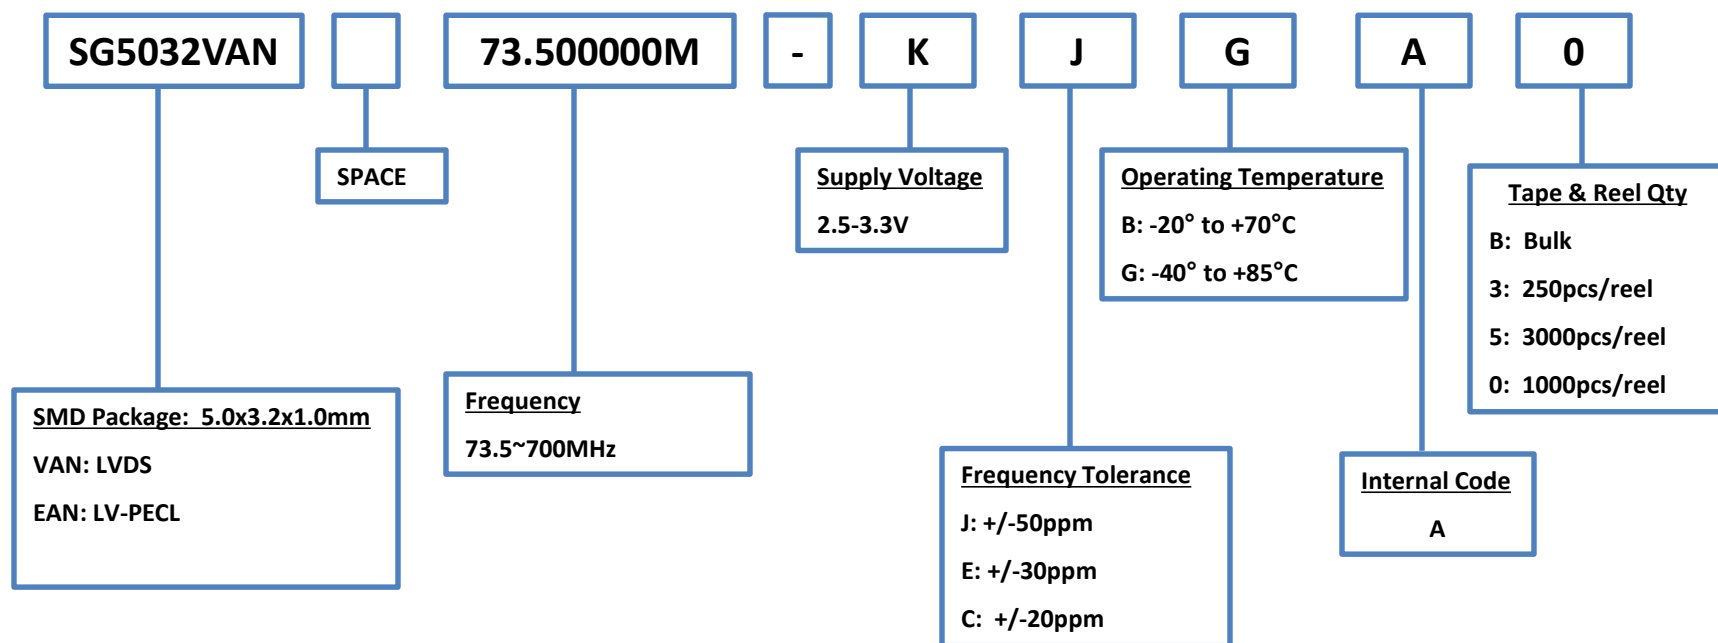

EPSON

June, 2021


Example: SG5032EAN 73.500000M-KJGA
CG is not available

Product Configuration System



Crystal Oscillators – SPXO

Output : LV-PECL, LVDS

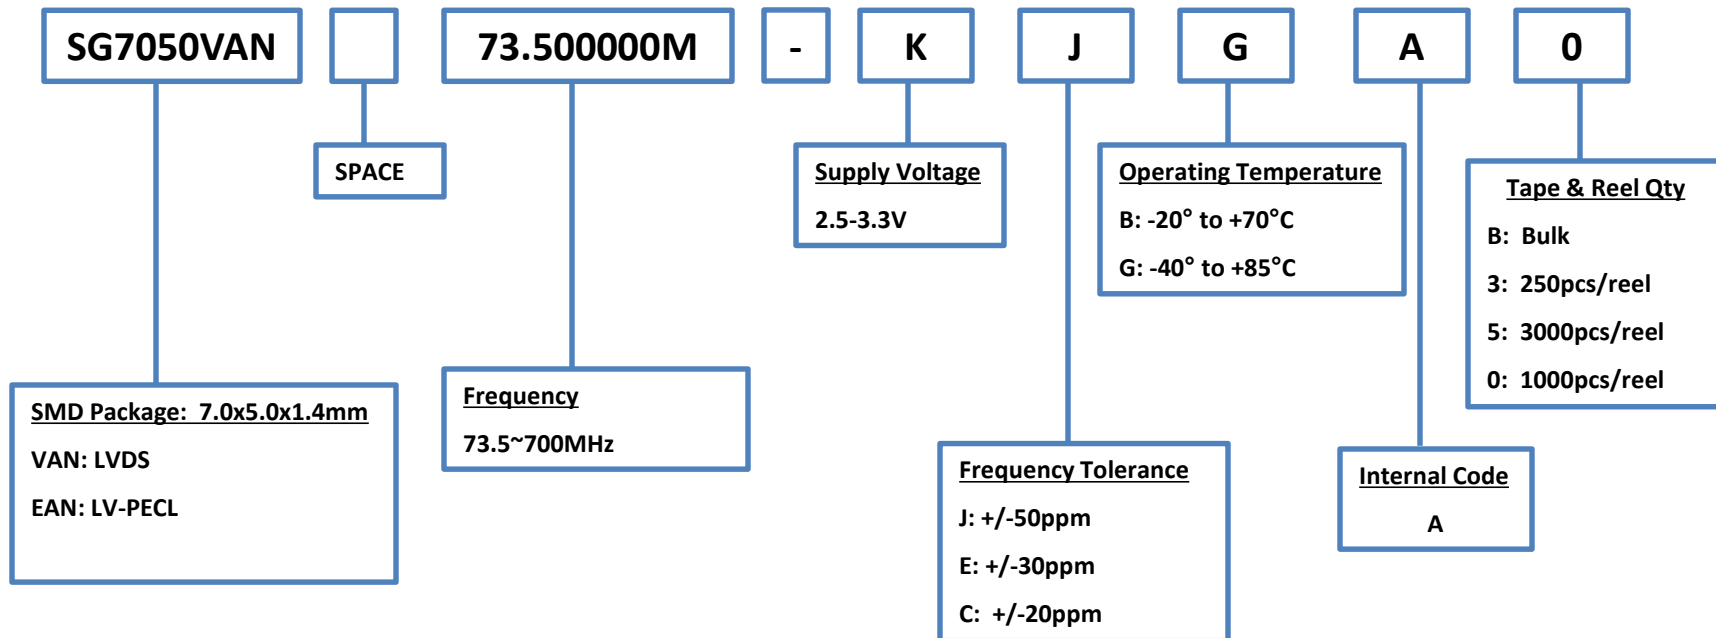

EPSON

June, 2021


Example: SG7050EAN 73.500000M-KJGA
CG is not available

Product Configuration System



Crystal Oscillator - SPXO

Discontinued

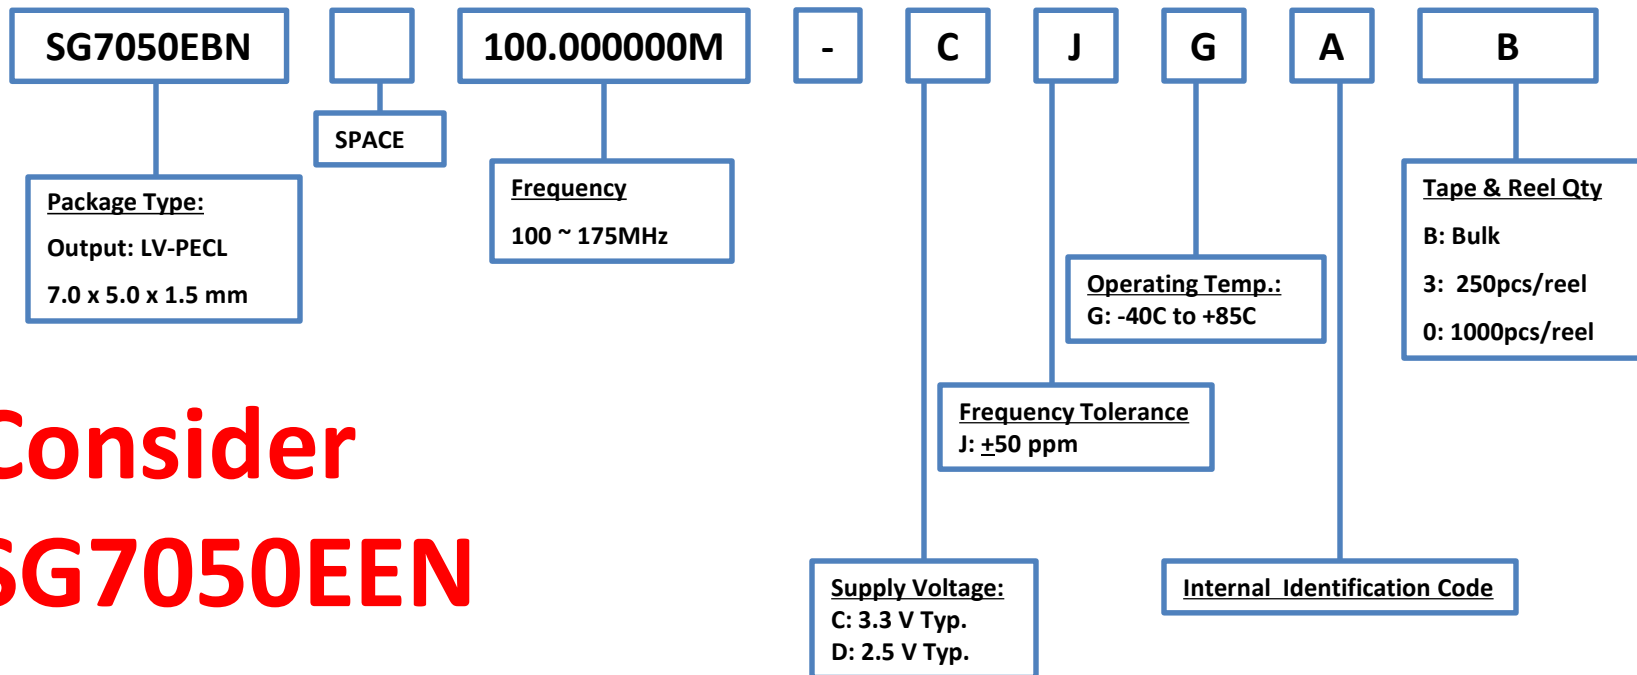

Consider SG7050EEN

EPSON

June, 2021

NOTE:


Please contact us for requirements not listed in this specification.

Product Configuration System



Crystal Oscillators - SPXO

Discontinued

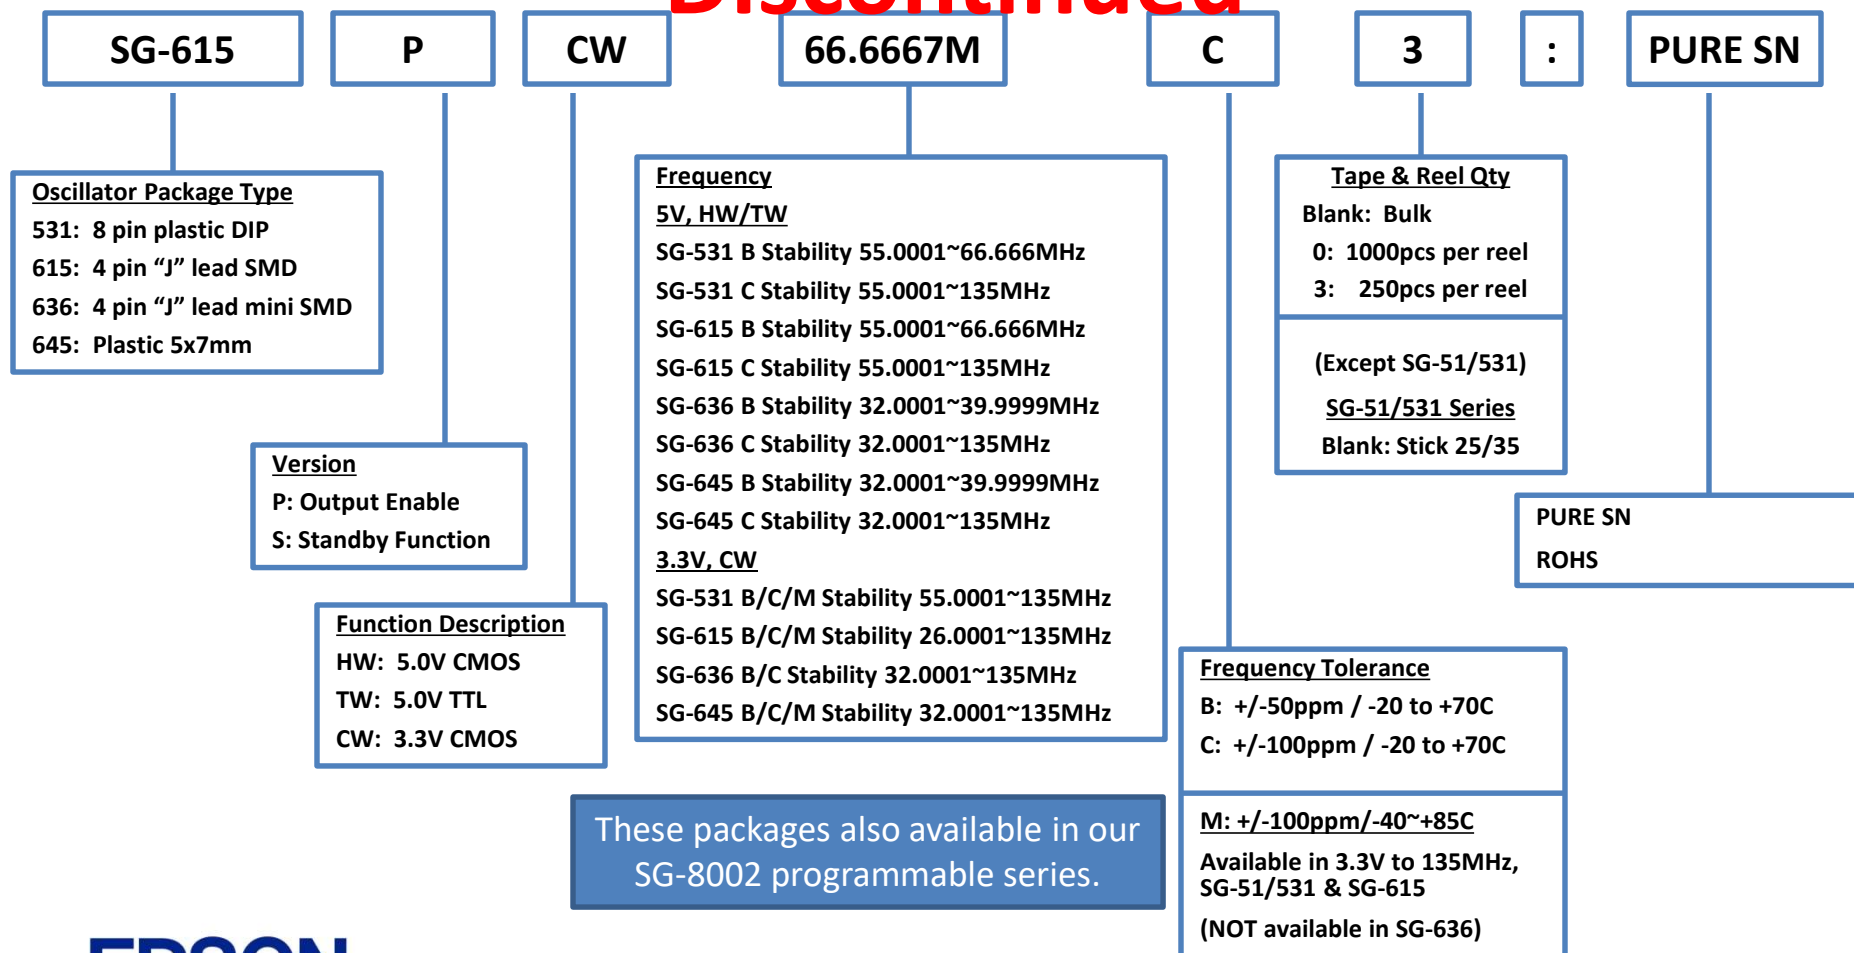

EPSON


June, 2021

Product Configuration System



Crystal Oscillators - SPXO

Discontinued

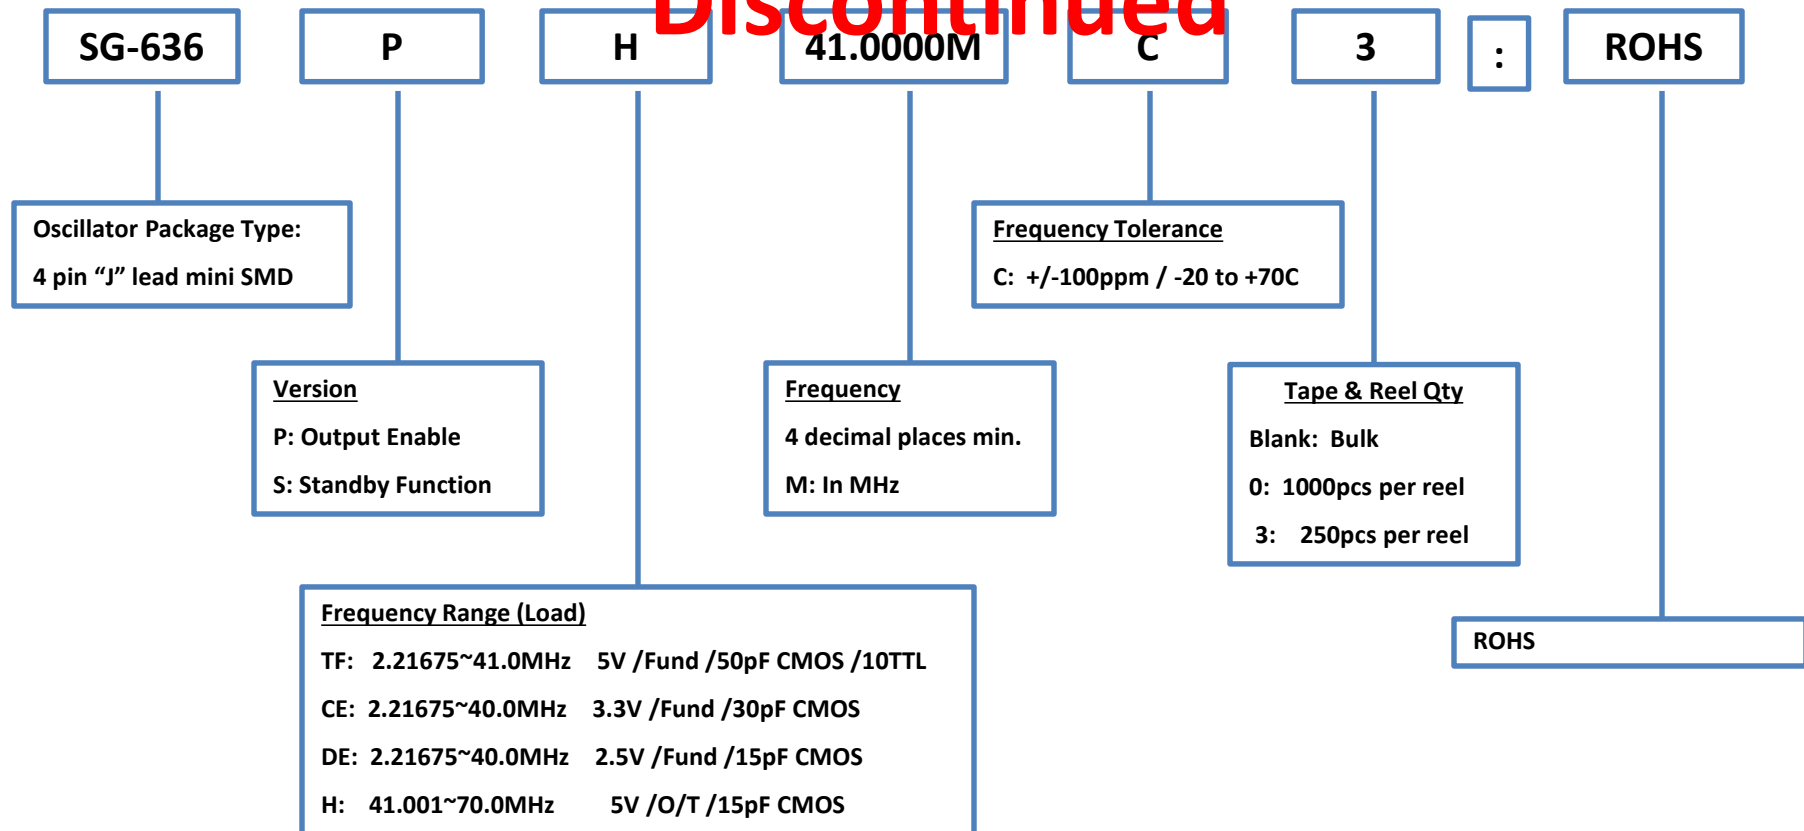

EPSON

June, 2021


These packages also available in our
SG-8002 programmable series.

Product Configuration System



Crystal Oscillators - SPXO

Discontinued

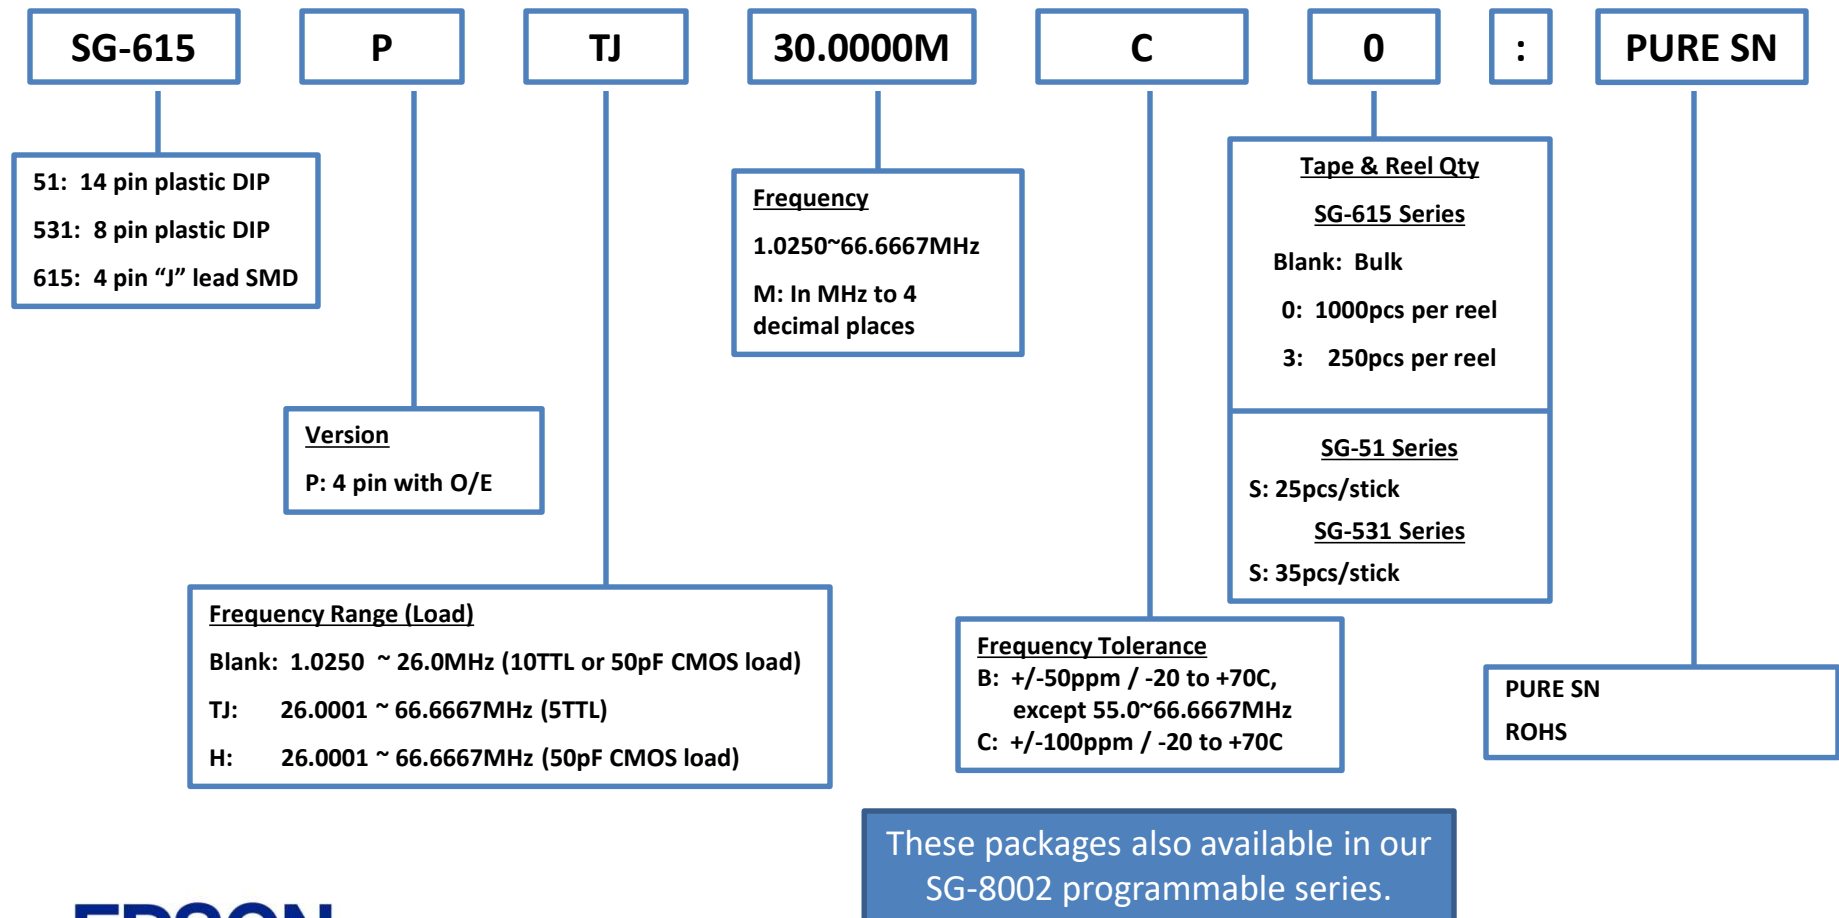

EPSON


June, 2021

Product Configuration System



Crystal Oscillators - SPXO

Discontinued

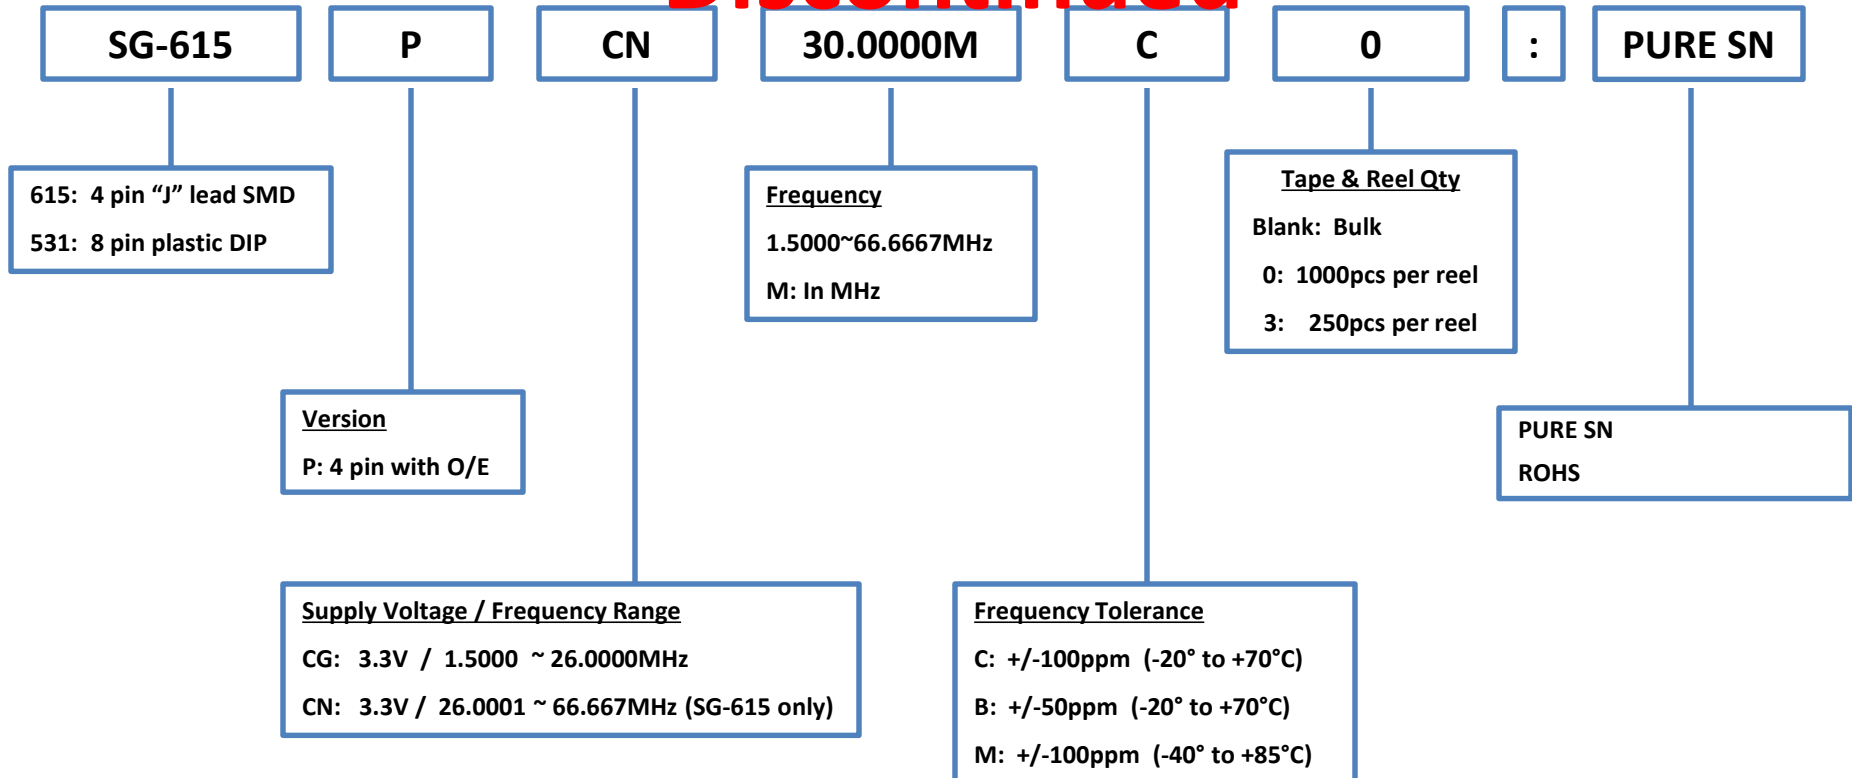

These packages also available in our SG-8002 programmable series.

EPSON


June, 2021

Product Configuration System



Crystal Oscillators - SPXO

Discontinued

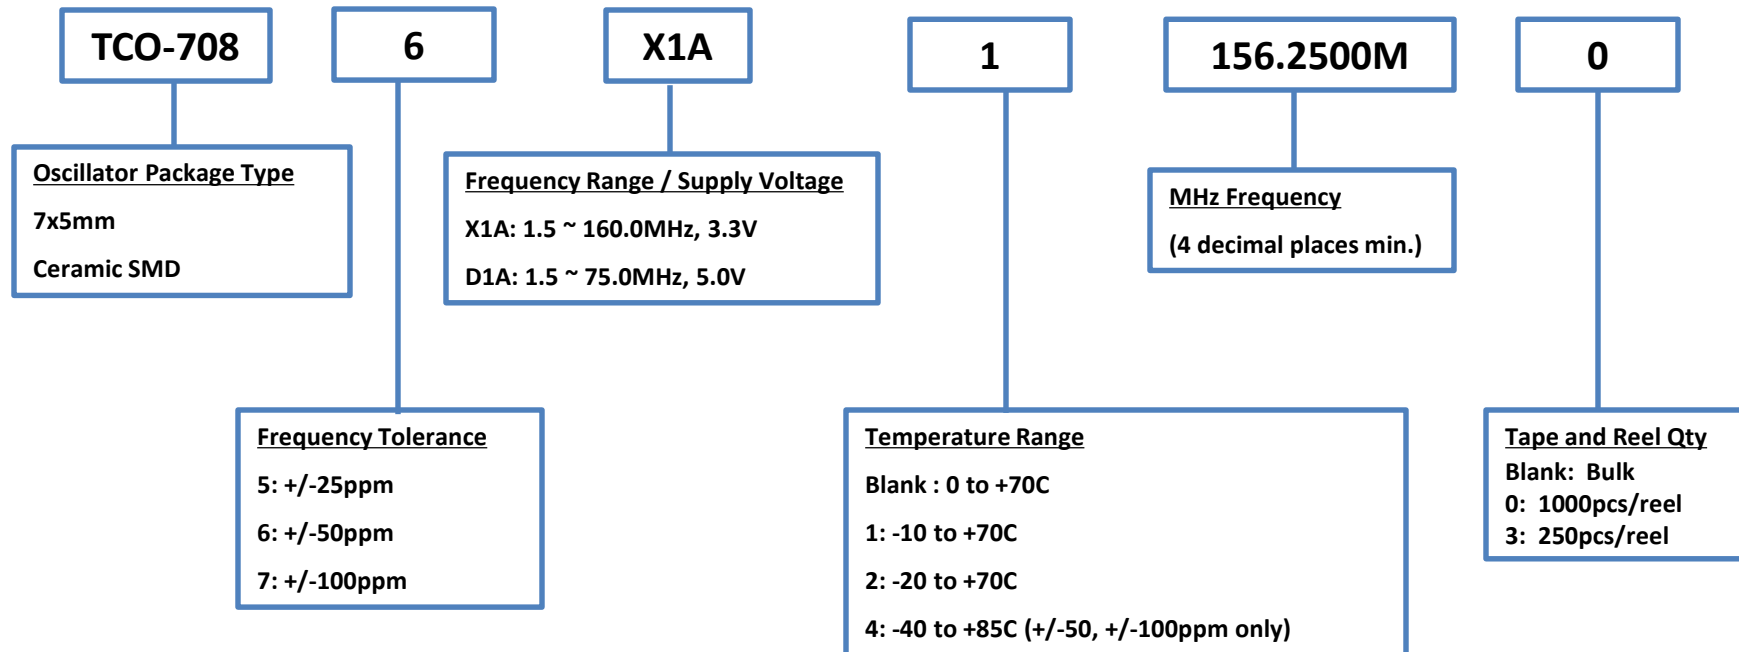


Product Configuration System



Crystal Oscillators - SPXO

Discontinued

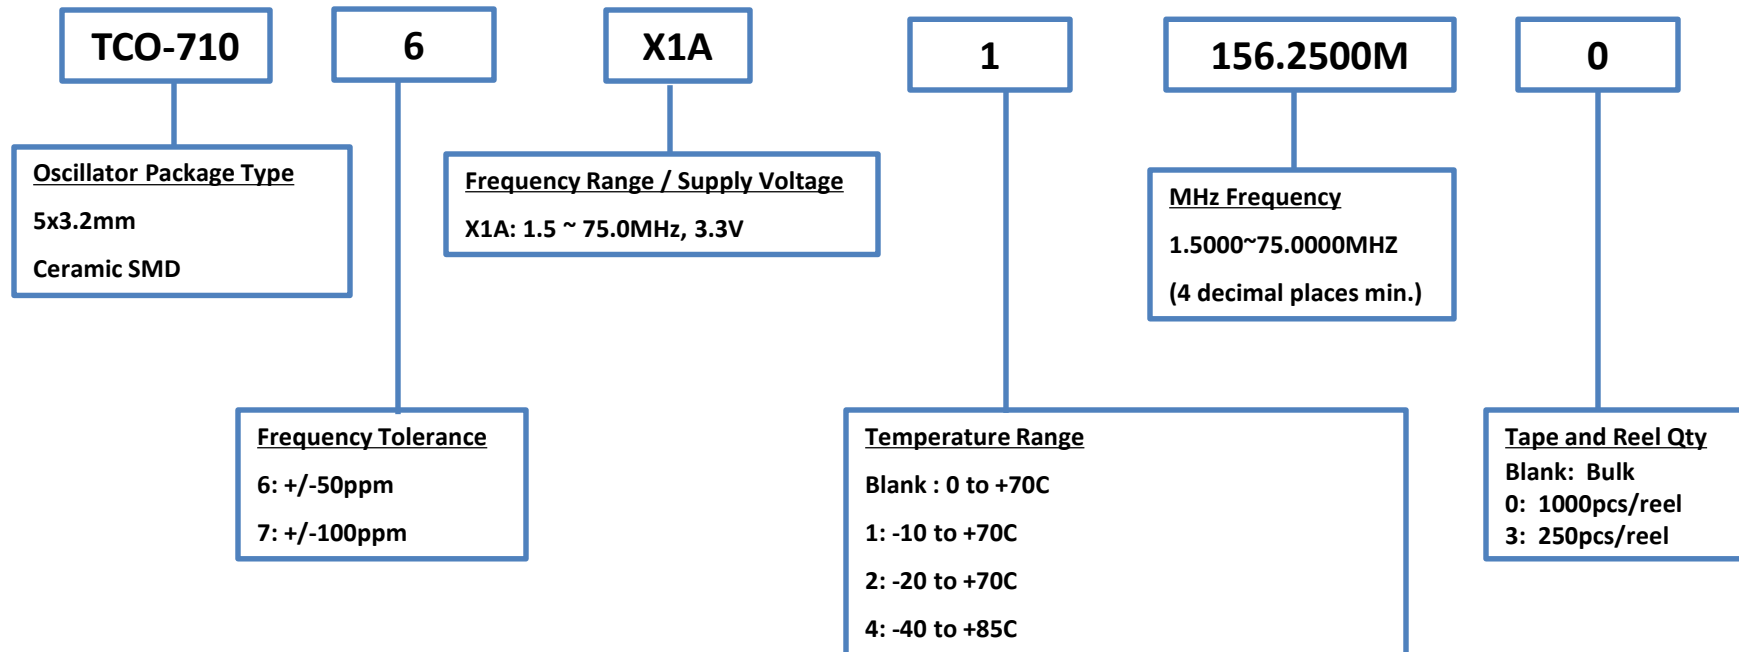


Product Configuration System



Crystal Oscillators - High Stability

Discontinued

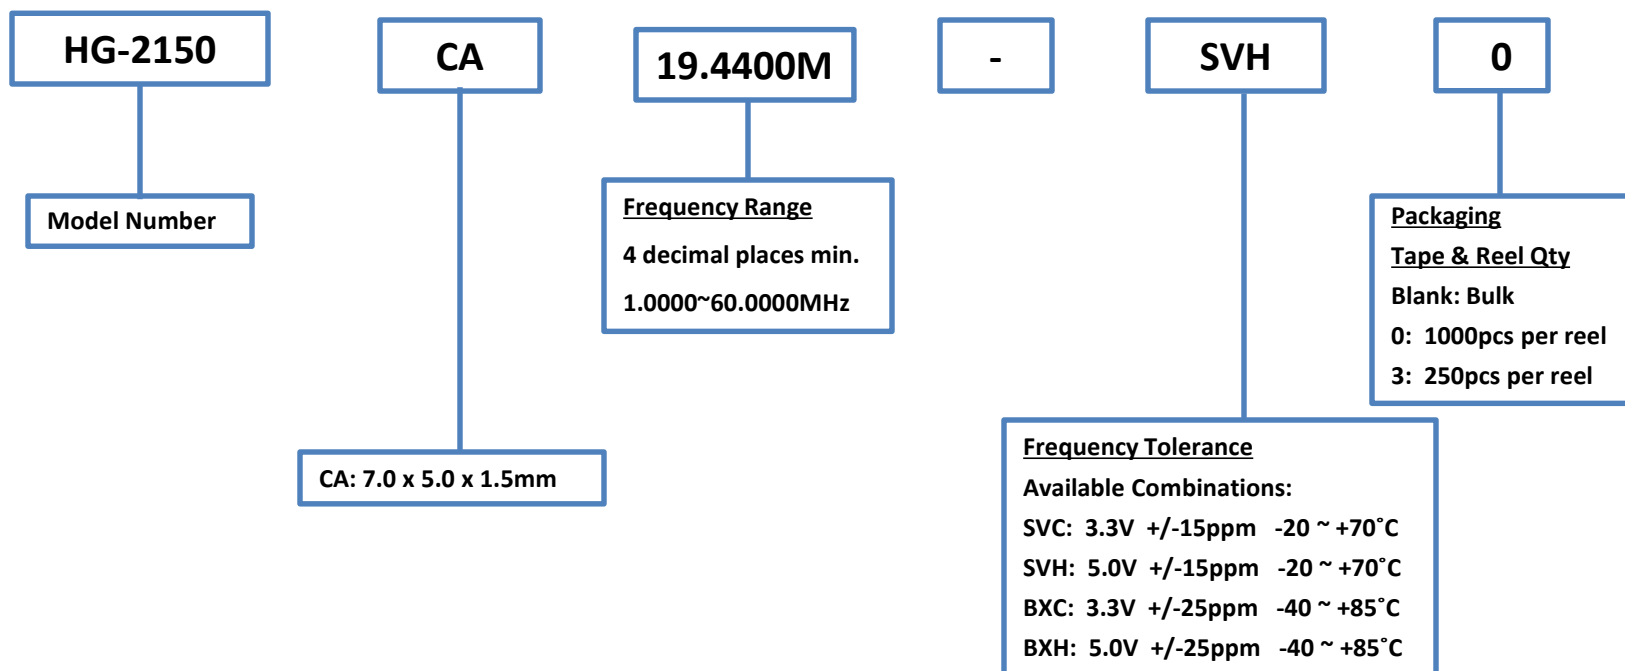

EPSON

June, 2021

Product Configuration Guide

TCXO



Product Configuration System



32.7680kHz TCXO

TG-3541CE

Base Model	Pkg.
TG-3541CE TG-3541CEA* *Automotive	3.2 x 2.5 x 1.0 mm 10 PIN Ceramic

32.7680K

Frequency
32.7680kHz Only

XA

Frequency Temp Char

XA=

+/-1.9PPM 0°C to 50°C
+/-3.4PPM -40°C to 85°C
+/-8.0ppm 85°C to 105°C

XB=

+/-1.9PPM 0°C to 50°C
+/-5.0PPM -40°C to 85°C
+/-8.0ppm 85°C to 105°C

0

Tape & Reel Qty

B: Bulk

3: 250pcs/reel

2: 500pcs/reel

0: 1000pcs/reel

6: 2000pcs/reel

X: Any TR

EPSON

June, 2021


NOTE:

Please contact us for requirements not listed in this specification.

Product Configuration System



TCXO/VC-TCXO High Stability

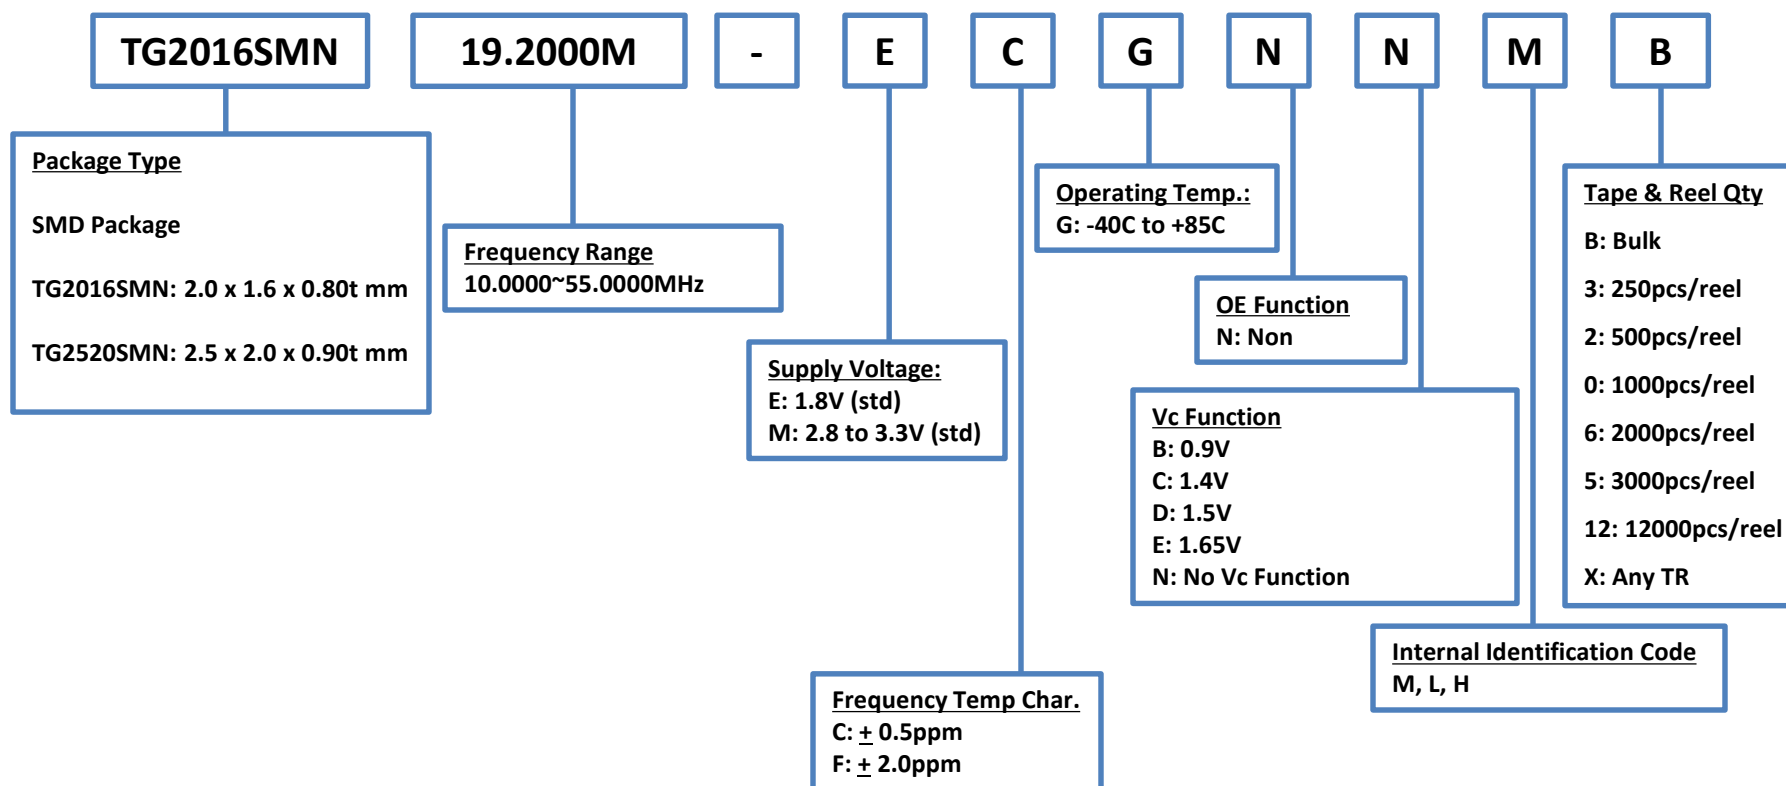


NOTE:

Please contact us for requirements not listed in this specification.

Product Configuration System



TCXO/VC-TCXO High Stability

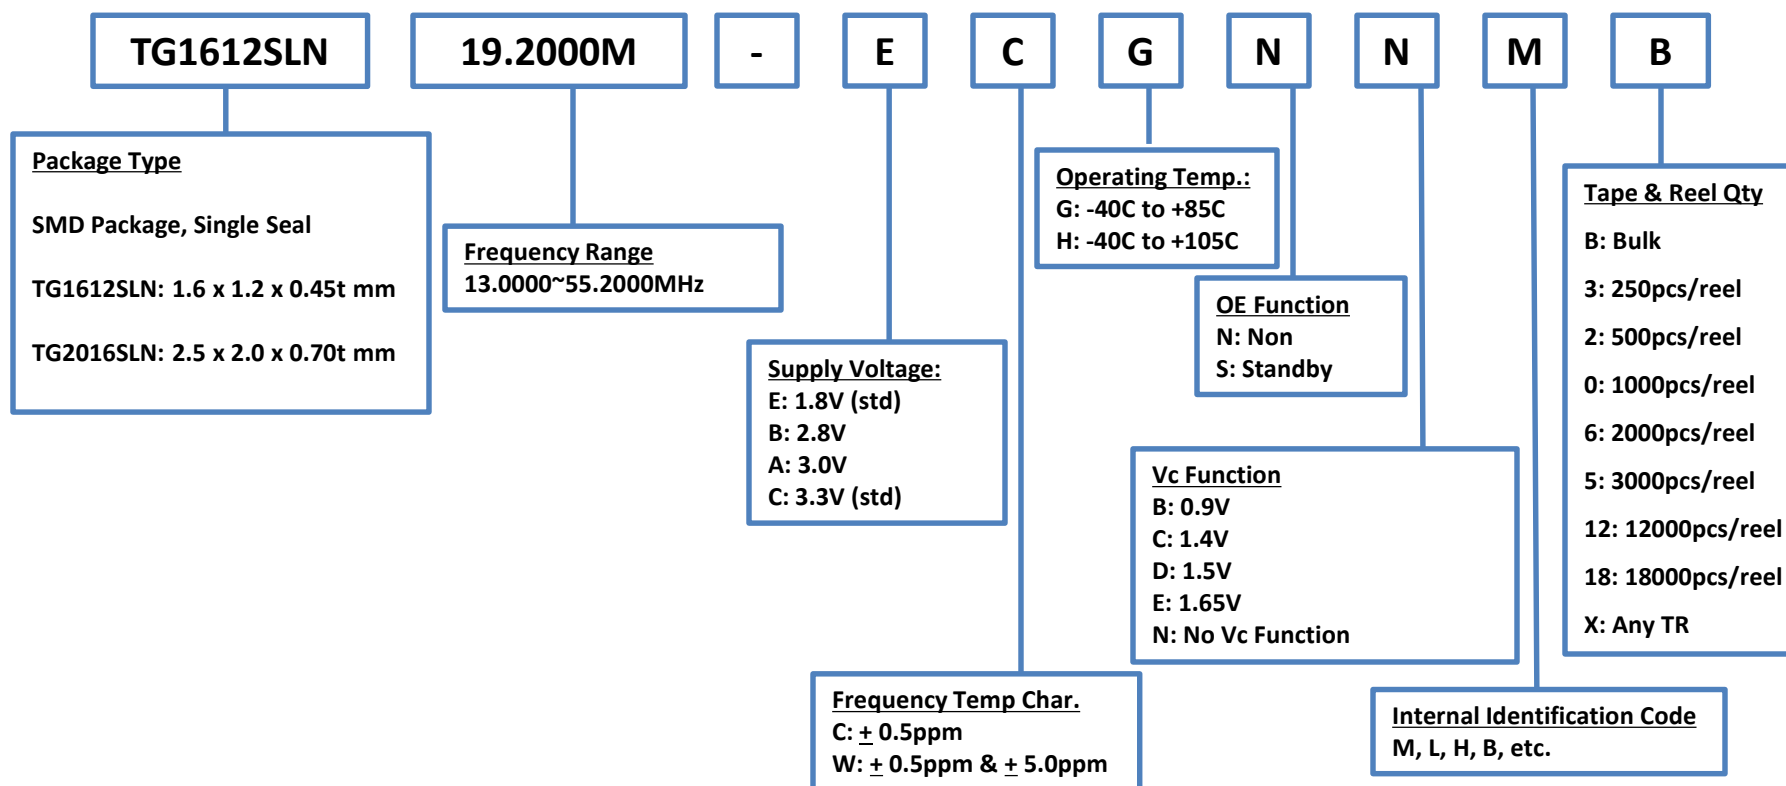

EPSON

June, 2021

NOTE:


Stability "CG" (+/-0.5ppm -40/85C) , "WH" (+/- 0.5 & +/-5.0ppm -40/105C) are available. For stability +/-0.5ppm -40/105C, please see TG2016SKA with stability "CH"

Please contact us for requirements not listed in this specification.

Product Configuration System



TCXO/VC-TCXO High Stability for Automotive

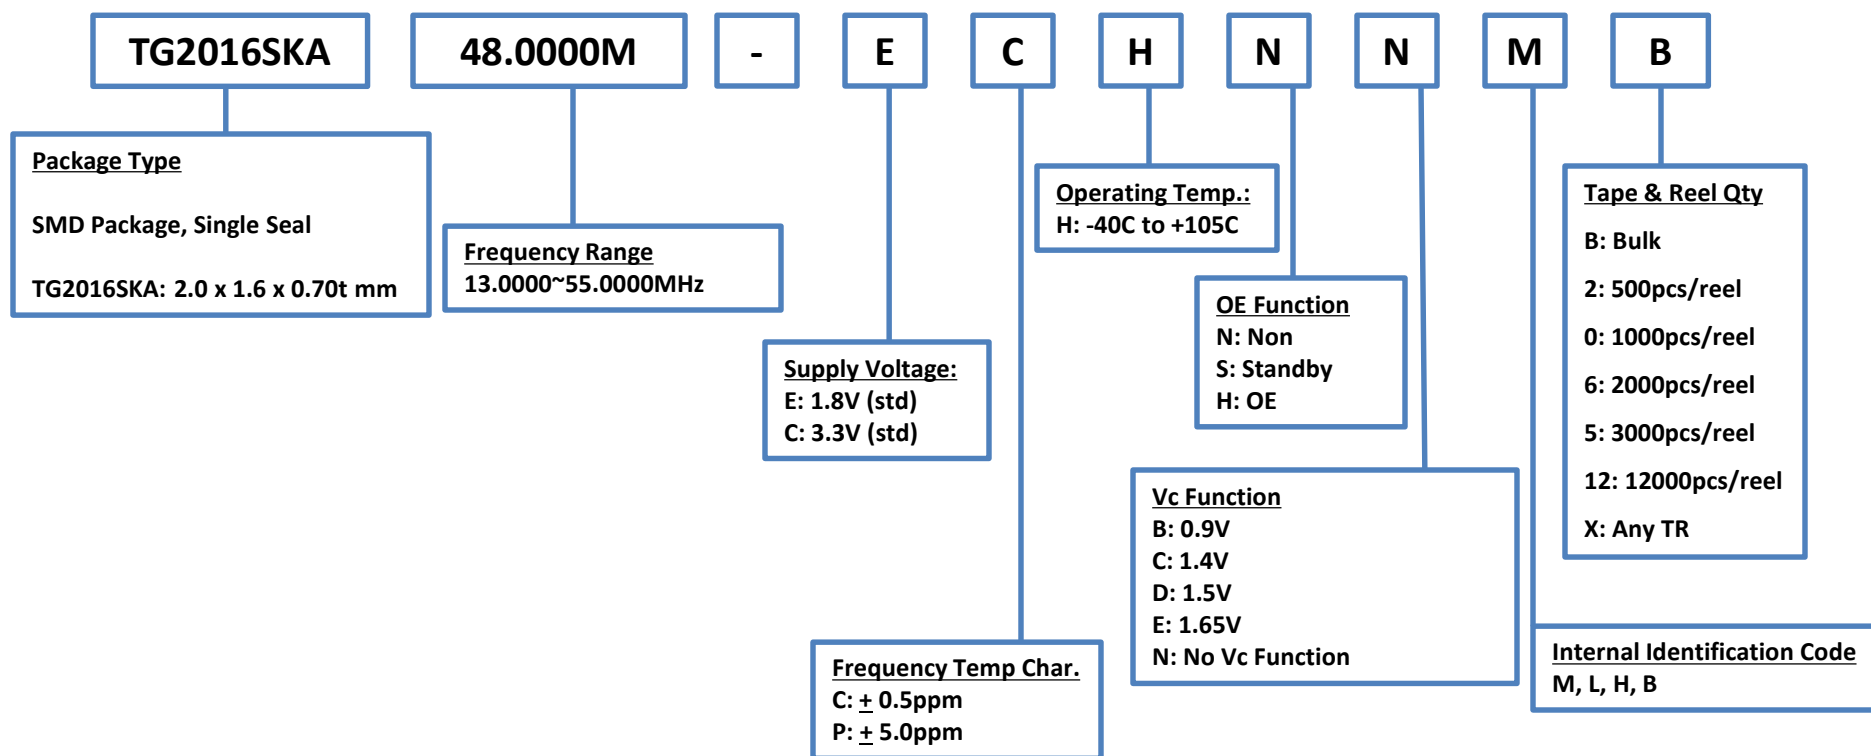

NOTE:

Please contact us for requirements not listed in this specification.


EPSON

June, 2021

Product Configuration System



TCXO/VC-TCXO High Stability for Automotive

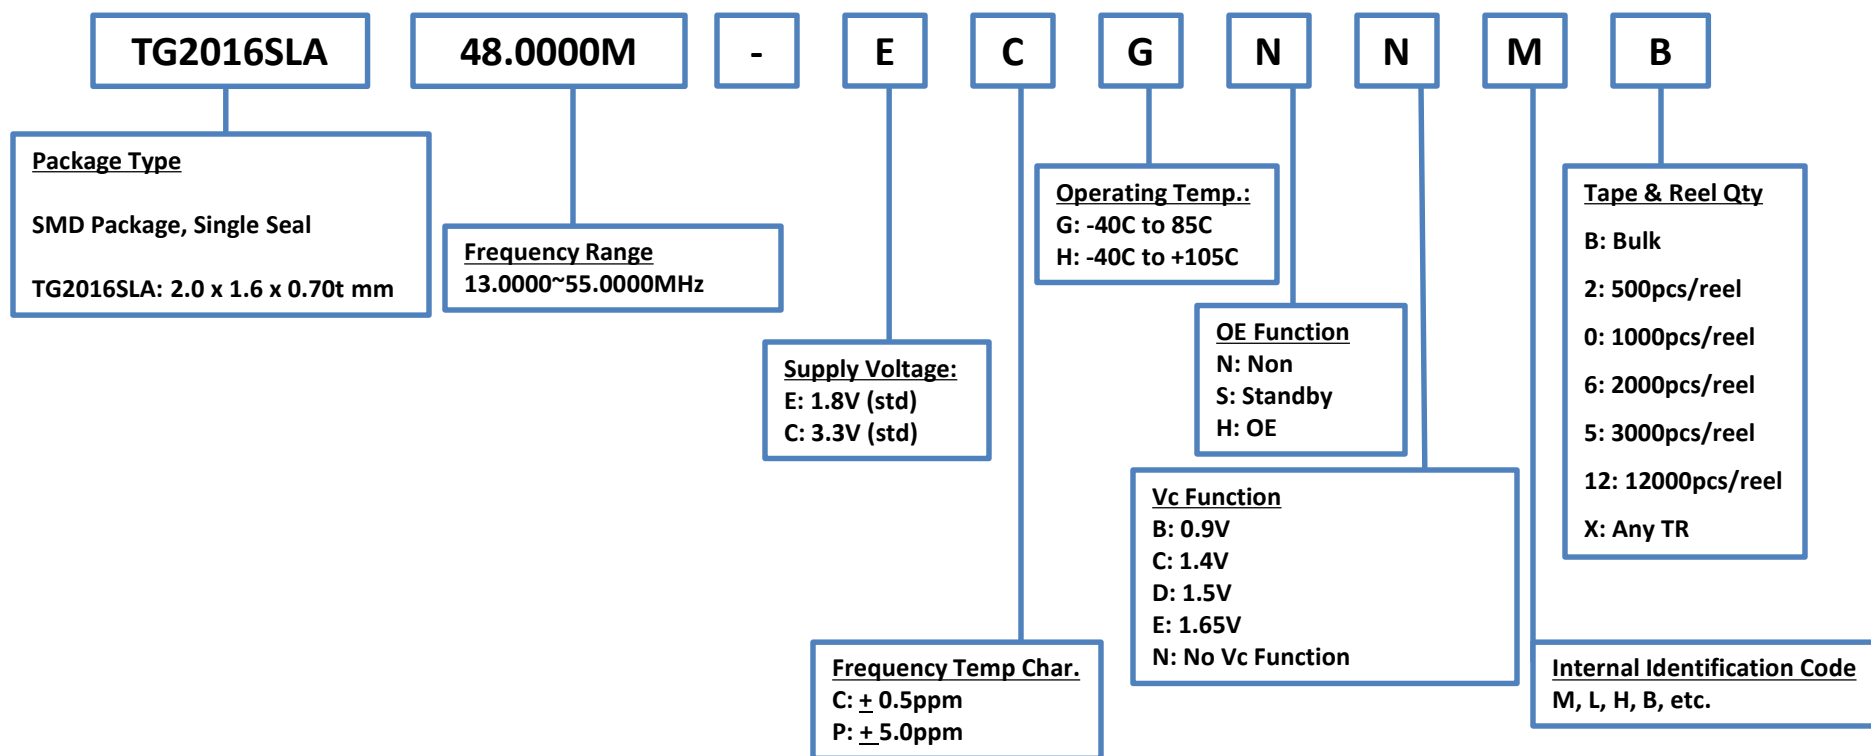

EPSON

June, 2021

NOTE:

Stability "CG" (+/-0.5ppm -40/85C), "PG" (+/-5ppm -40/85C), "PH" (+/-5.0ppm -40/105C) are available. For stability +/-0.5ppm -40/105C, please see TG2016SKA with stability "CH"


Please contact us for requirements not listed in this specification.

Product Configuration System



TCXO

Discontinued

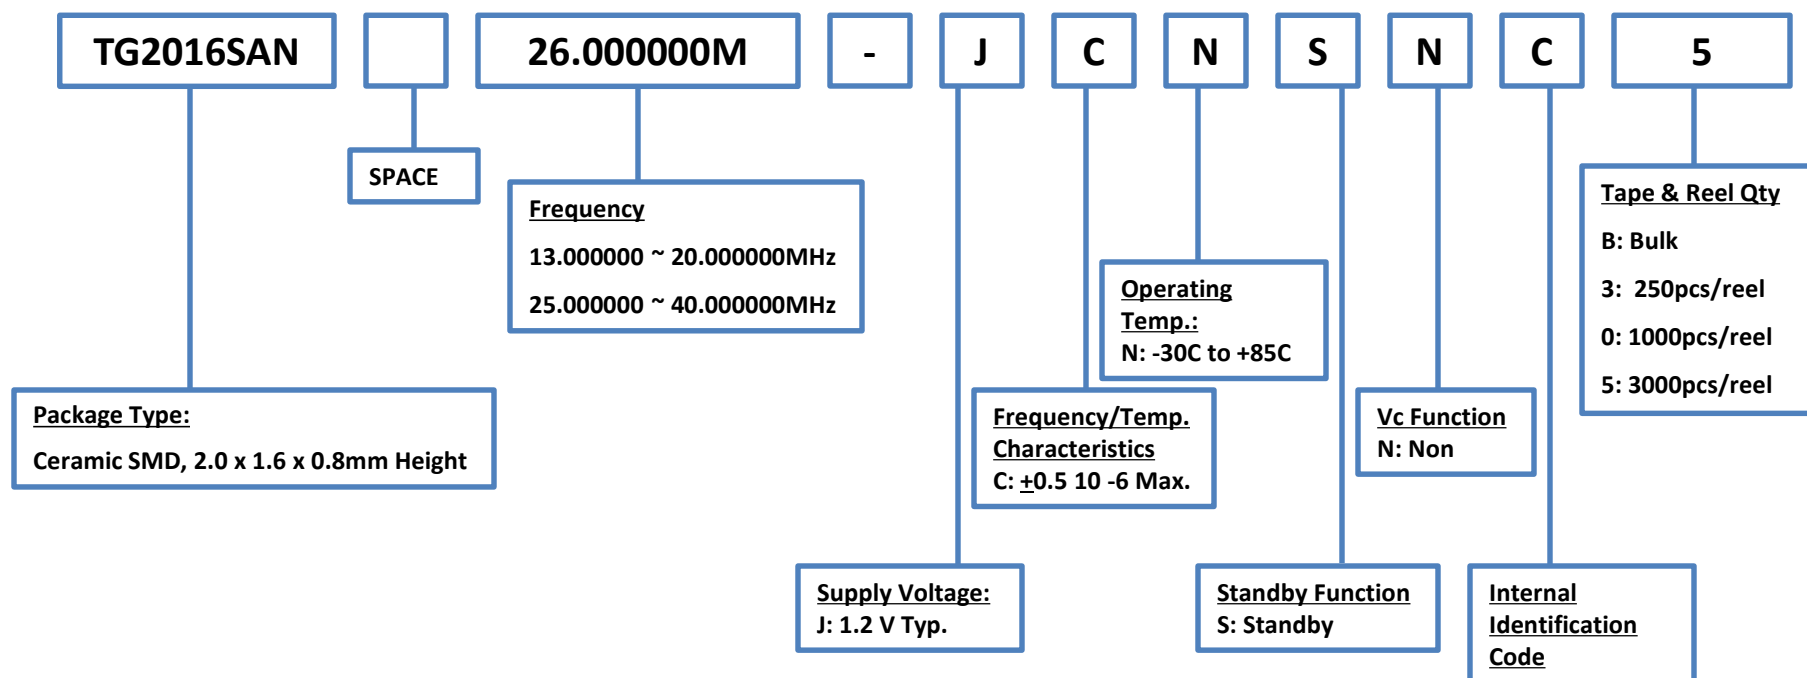

NOTE:

Please contact us for requirements not listed in this specification.


EPSON

June, 2021

Product Configuration System



TCXO/VC-TCXO High Stability

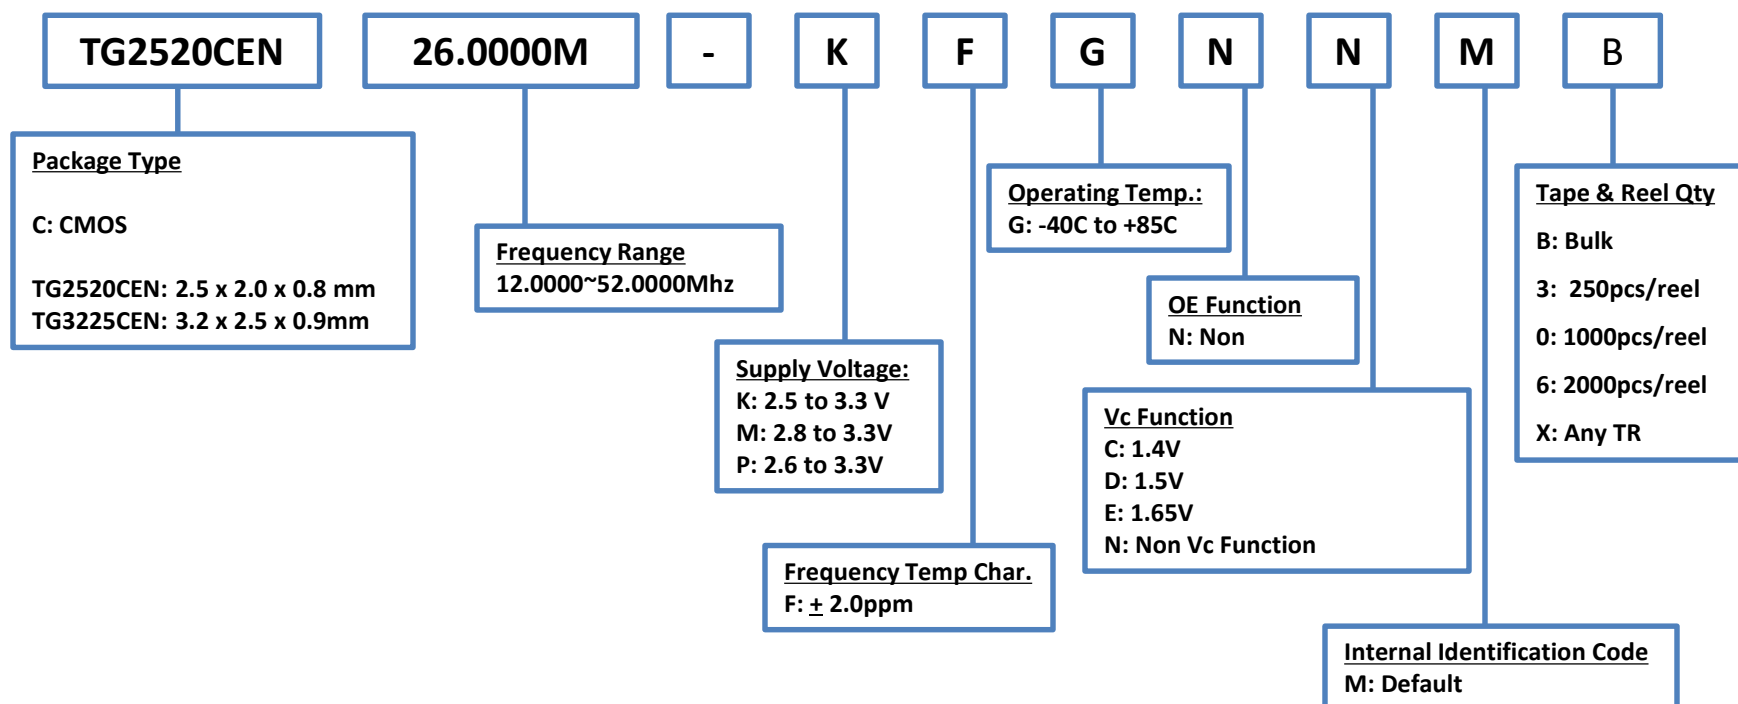

NOTE:


Please contact us for requirements not listed in this specification.

Product Configuration System



TCXO/VC-TCXO High Stability

Discontinued

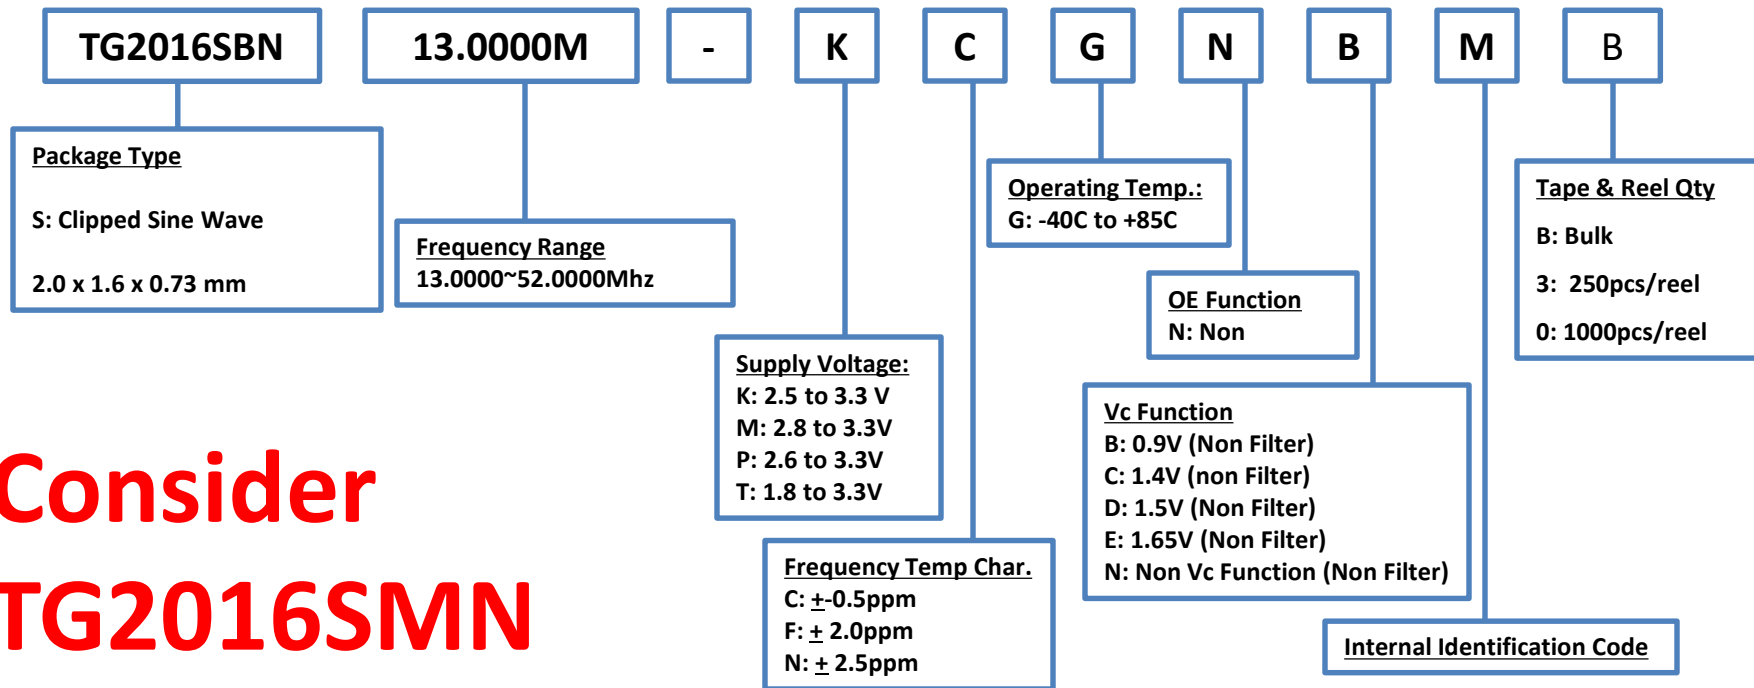

Consider TG2016SMN

EPSON

June, 2021

NOTE:


Please contact us for requirements not listed in this specification.

Product Configuration System



TCXO/VC-TCXO High Stability

Discontinued

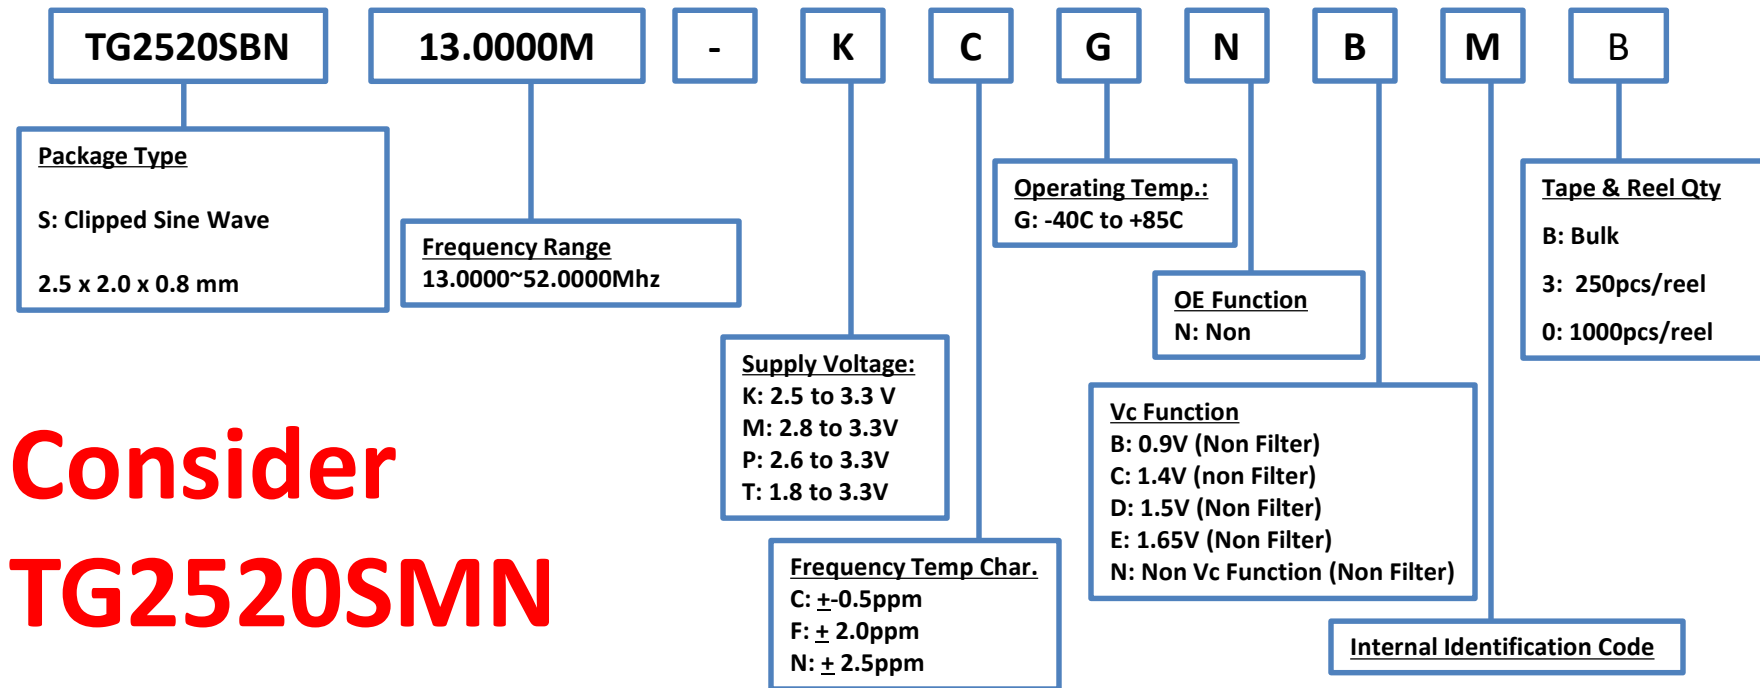

Consider TG2520SMN

EPSON

June, 2021

NOTE:

Please contact us for requirements not listed in this specification.

Product Configuration System



TCXO

TG-5006CJ

-

xxx

19.2000M

Package Type:

TG-5006CJ - 2.0 X 1.6 X 0.8 mm
TG-5006CG - 2.5 X 2.0 X 0.9 mm
TG-5006CE - 3.2 X 2.5 X 1.0 mm

TG-5035CJ - 2.0 X 1.6 X 0.8 mm
TG-5035CG - 2.5 X 2.0 X 0.9 mm
TG-5035CE - 3.2 X 2.5 X 1.0 mm

TG-5031CJ - 2.0 X 1.6 X 0.8 mm
TG-5021CG - 2.5 X 2.0 X 0.9 mm
TG-5021CE - 3.2 X 2.5 X 1.0 mm

Specification Code:

Issued by Epson after
reviewing customer
requirements

Frequency

TG-5006CJ/CG/CE: 13 ~ 52MHz
STD Freqs: 16.367667, 16.368, 16.369, 19.2, 26, 38.4MHz

TG-5035CE: 10 ~ 40 MHz
TG-5035CJ/CG/: 13 ~ 52MHz
STD Freqs: 13, 16.368, 16.369, 19.2, 26, 38.4MHz

TG-5031CJ/TG-5021CG: 13 ~ 52MHz
TG-5021CE: 10 ~ 40MHz
STD Freqs: 13, 19.2, 26, 38.4MHz

EPSON

June, 2021

NOTE:


Please contact us for requirements not listed in this specification.

Product Configuration System



TCXO/VC-TCXO
Ultra High Stability

Discontinued

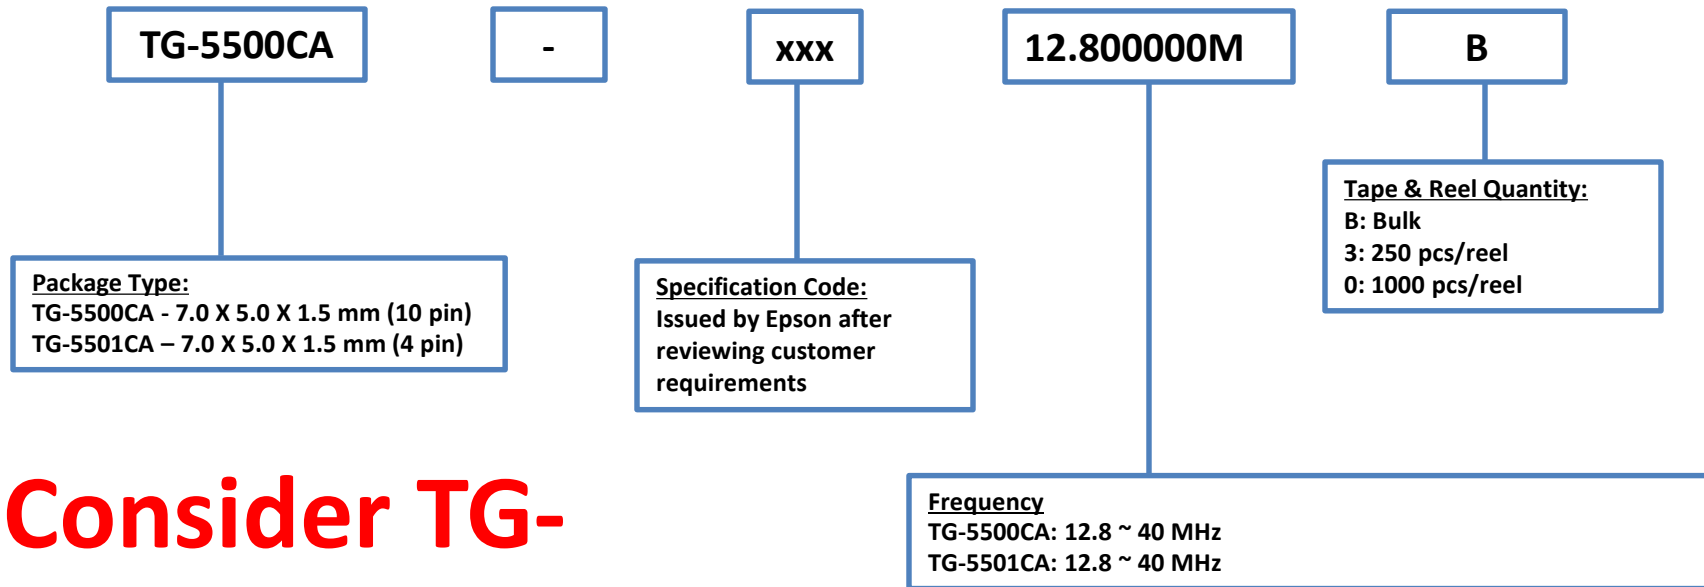

Consider TG-5510CA

EPSON

June, 2021


NOTE:

Please contact us for requirements not listed in this specification.

Product Configuration System



TCXO/VC-TCXO Ultra High Stability

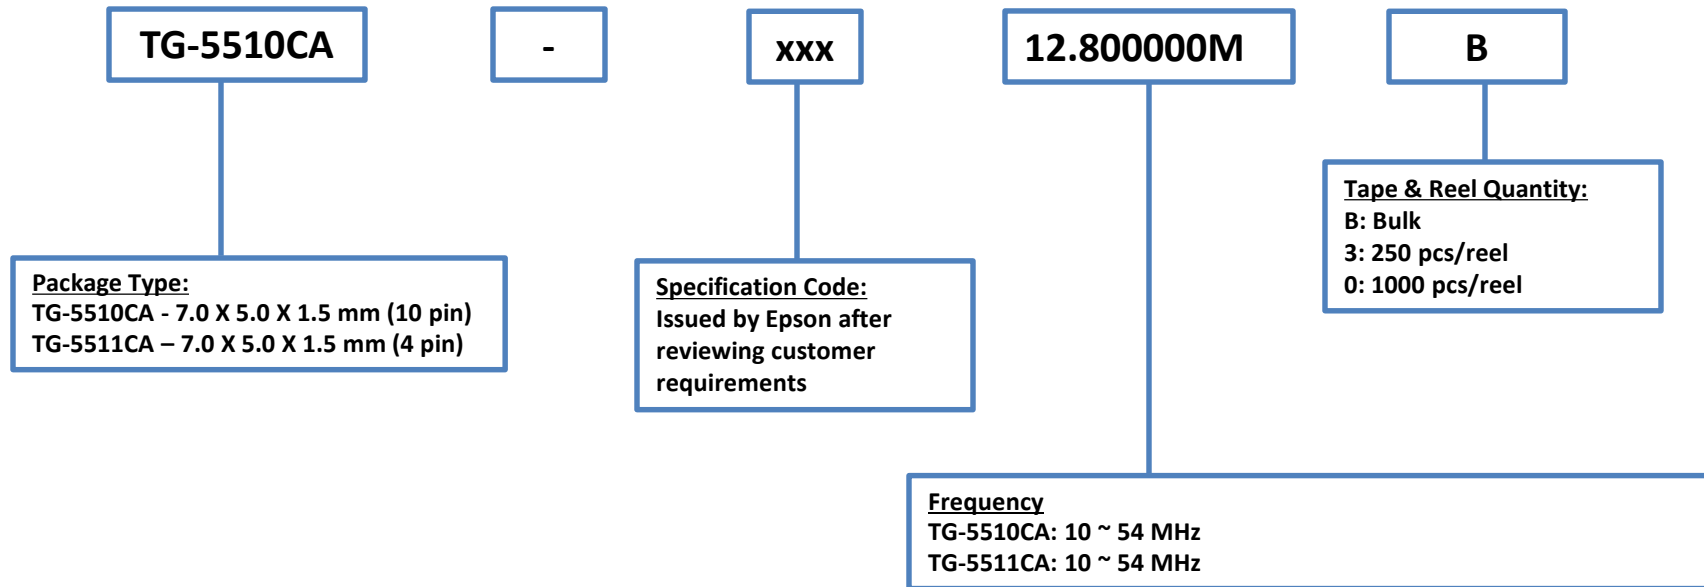

EPSON

June, 2021

NOTE:


Please contact us for requirements not listed in this specification.

Product Configuration System



TCXO/VC-TCXO Ultra High Stability

Discontinued

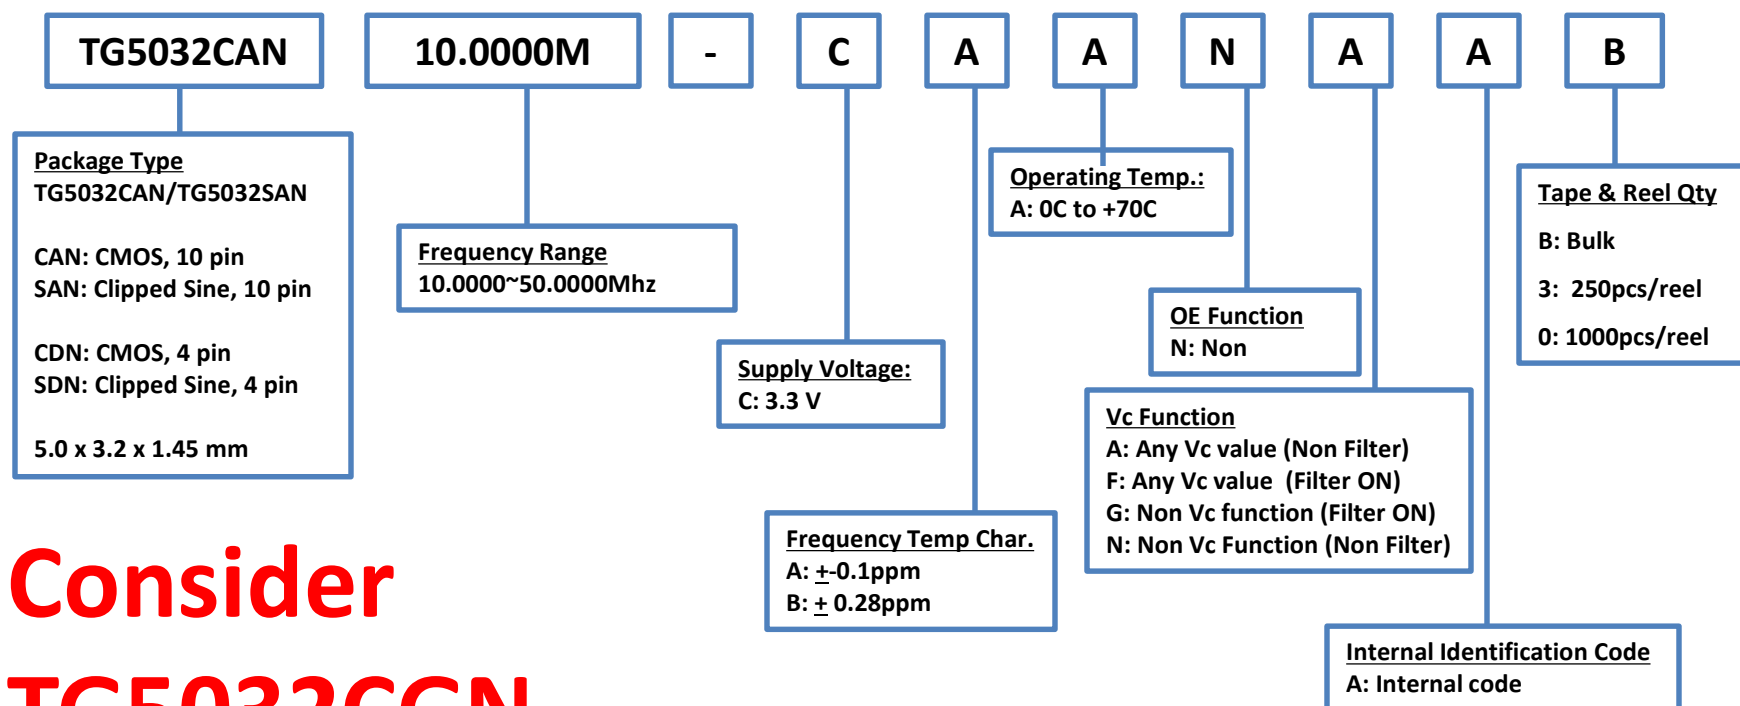

Consider TG5032CGN

EPSON

June, 2021

NOTE:


Please contact us for requirements not listed in this specification. 83

Product Configuration System



TCXO/VC-TCXO Ultra High Stability

Discontinued

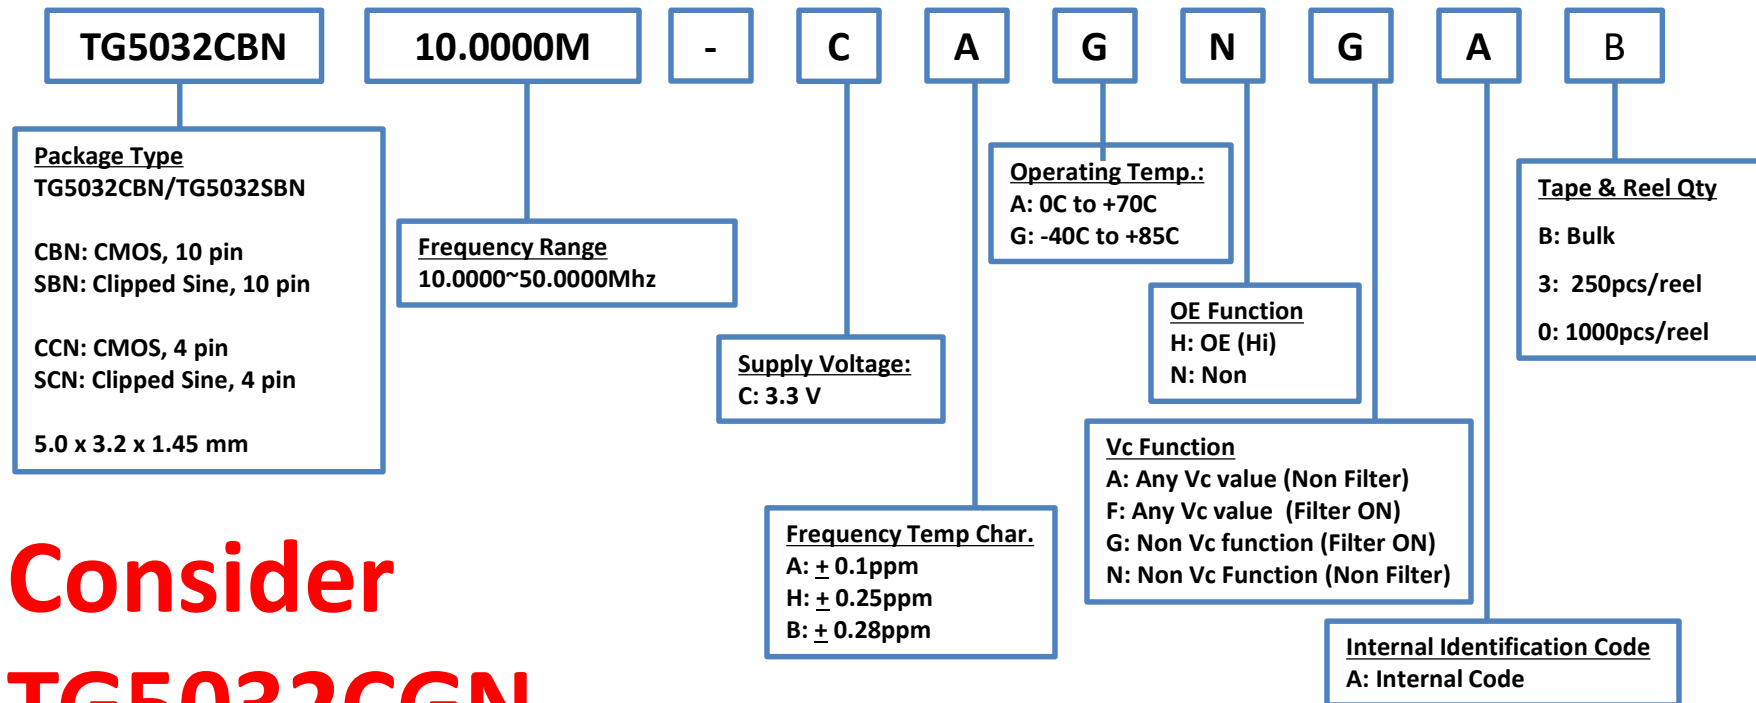

Consider TG5032CGN

EPSON

June, 2021


NOTE:

Please contact us for requirements not listed in this specification. 84

Product Configuration System



TCXO/VC-TCXO Ultra High Stability

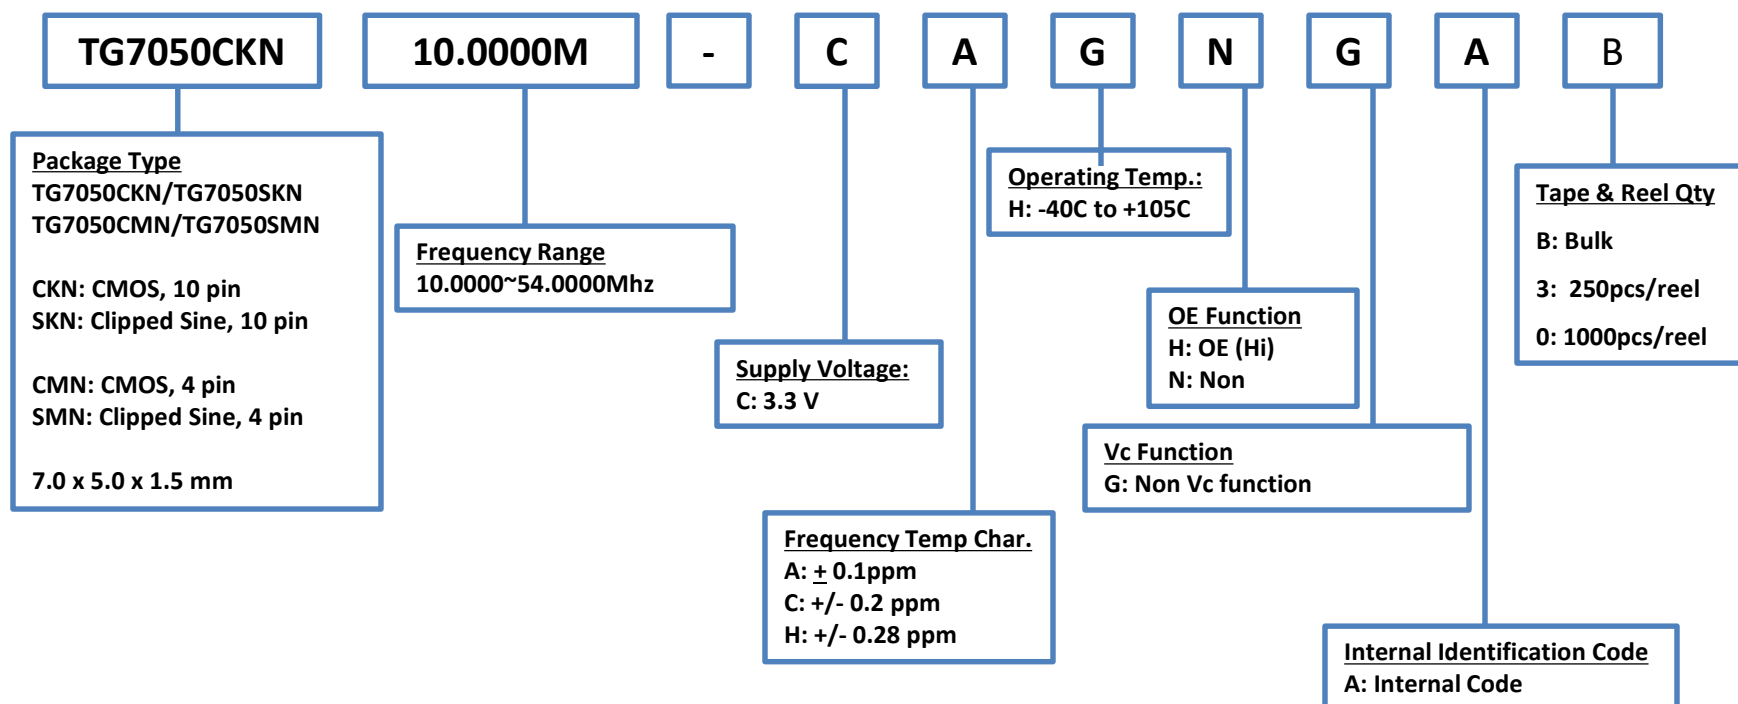

EPSON


June, 2021

NOTE:

Please contact us for requirements not listed in this specification. 85

Product Configuration Guide

SAW OSCILLATORS

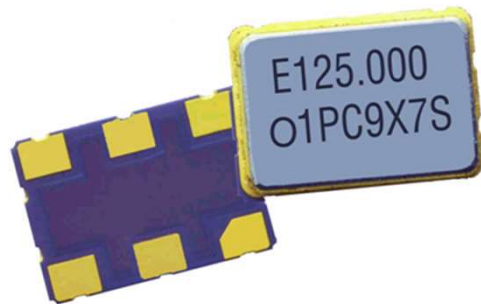


Product Configuration System



Crystal Oscillators – Low Jitter (SAW)

Not Recommended

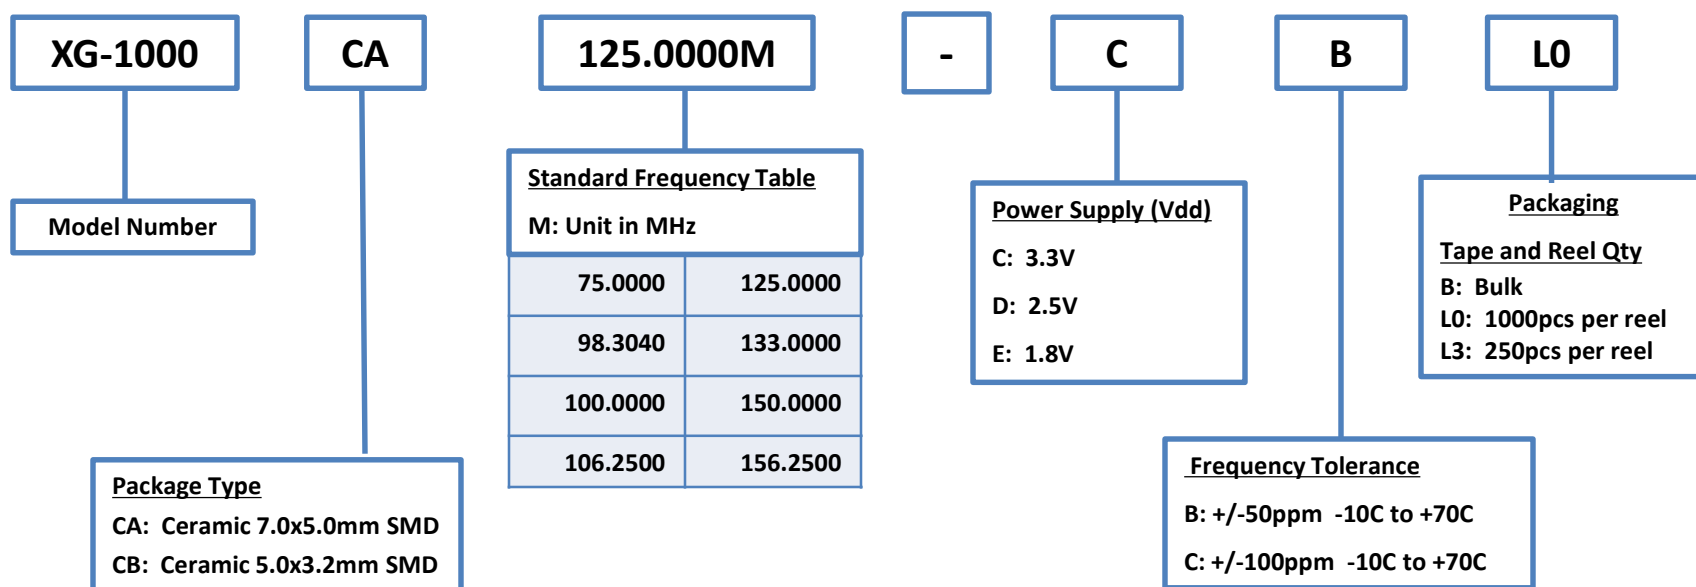

EPSON

June, 2021


87

Product Configuration System



Crystal Oscillators – Low Jitter (SAW)

Not Recommended

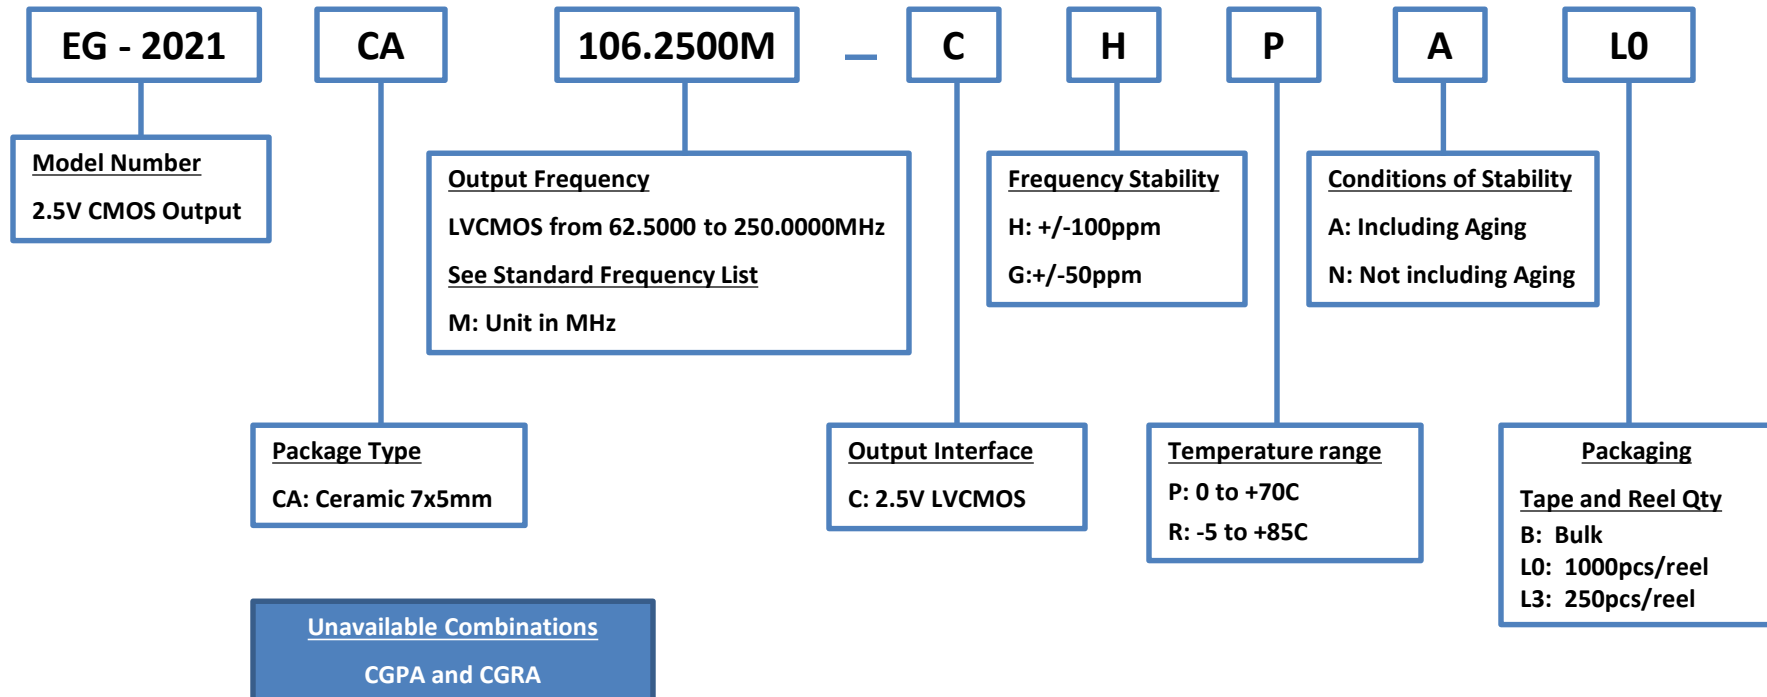

Standard Frequencies

EG-2021CA (2.5V CMOS)


62.5000	125.0000
66.5000	133.0000
75.0000	150.0000
78.1250	156.2500
90.0000	250.0000
98.3040	
100.0000	
106.2500	
108.0000	
124.4160	

Product Configuration System



Crystal Oscillators – Low Jitter (SAW)

Not Recommended

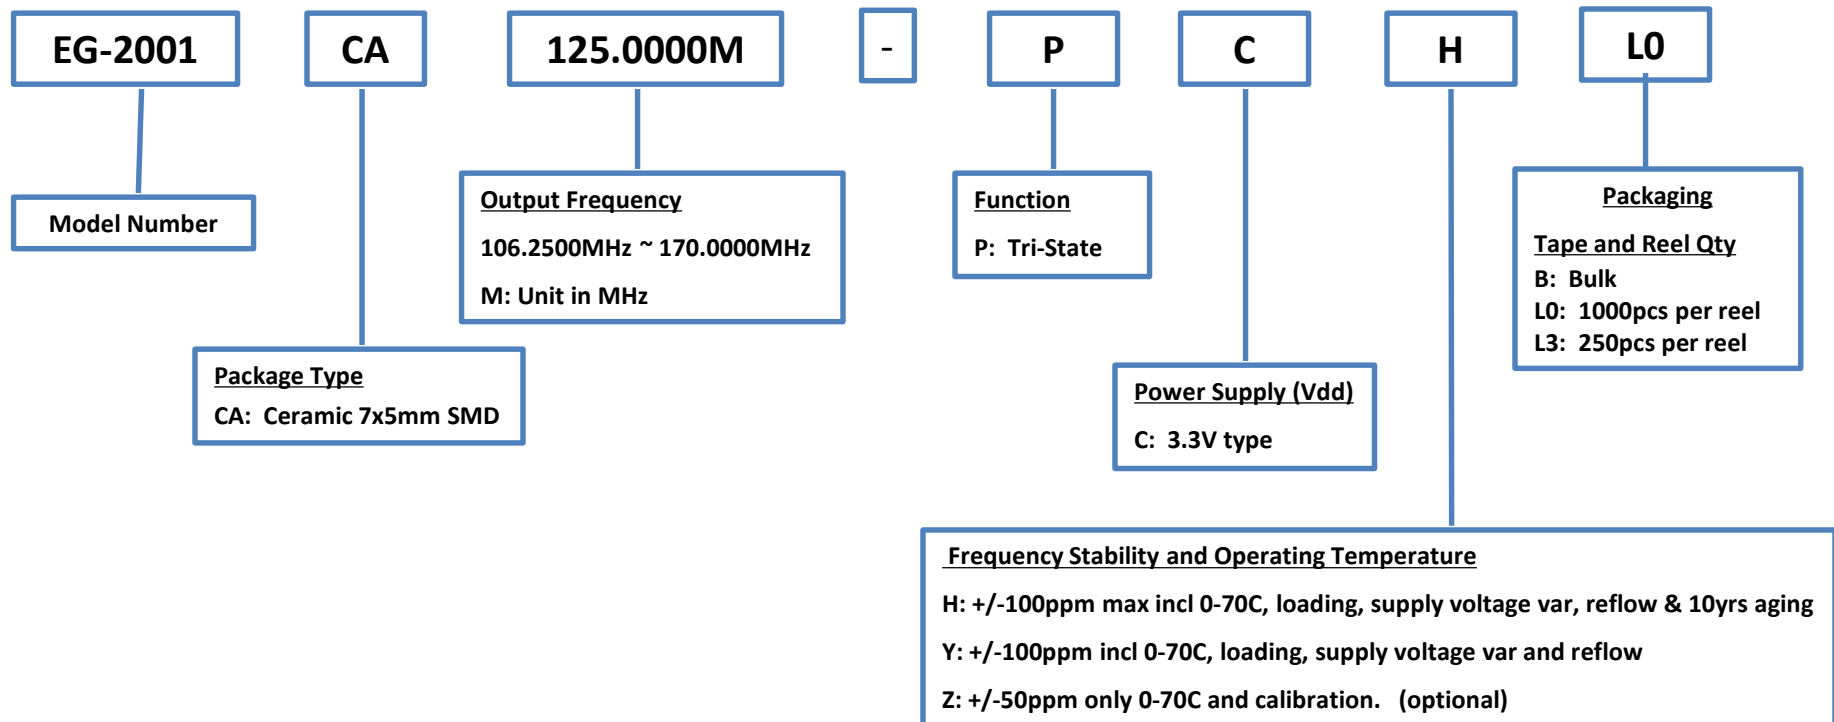

Standard Frequencies

EG-2001 (3.3V CMOS)


106.2500	155.5200
108.0000	156.2500
125.0000	159.3750
128.0000	160.0000
132.8125	161.1328
133.0000	166.0000
133.3333	166.6285
135.0000	166.6667
143.0000	167.3316
150.0000	

Product Configuration System



Crystal Oscillators – Low Jitter (SAW)

Discontinued

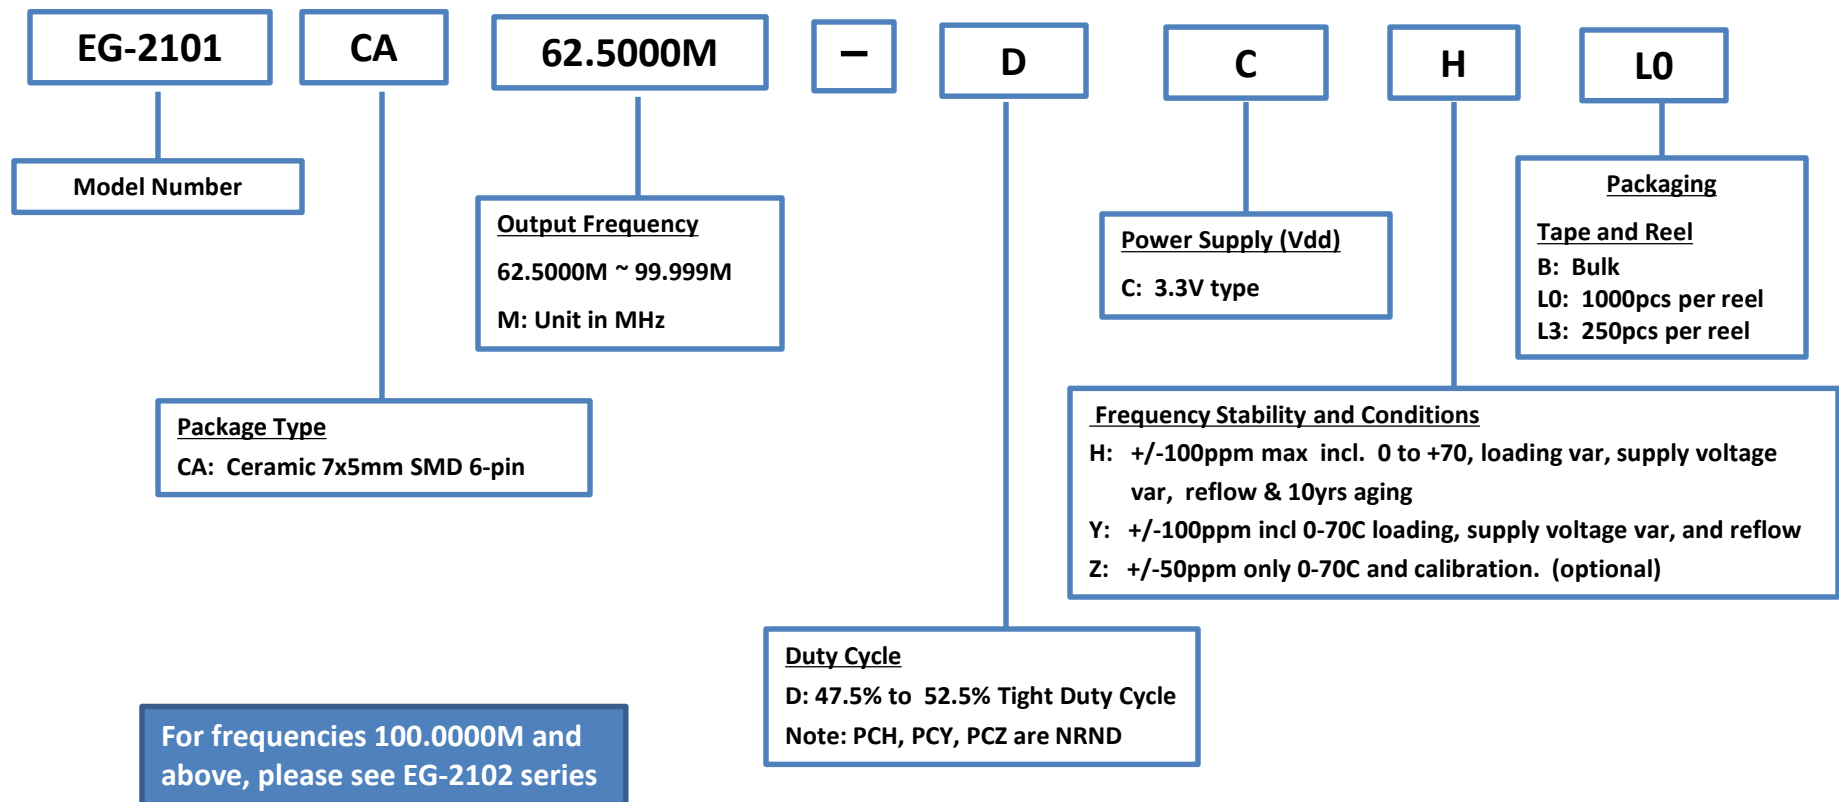

EPSON

June, 2021

92

Standard Frequencies

EG-2101

EG-2101CA DCx	
62.5000	79.6875
64.0000	80.0000
66.4063	80.5664
66.5000	83.0000
66.6667	83.3143
67.5000	83.3333
71.5000	83.6658
75.0000	87.5000
77.7600	90.0000
78.1250	


For frequencies 100.0000M and above, please see EG-2102 series

Product Configuration System



Crystal Oscillators – Low Jitter (SAW)

Discontinued

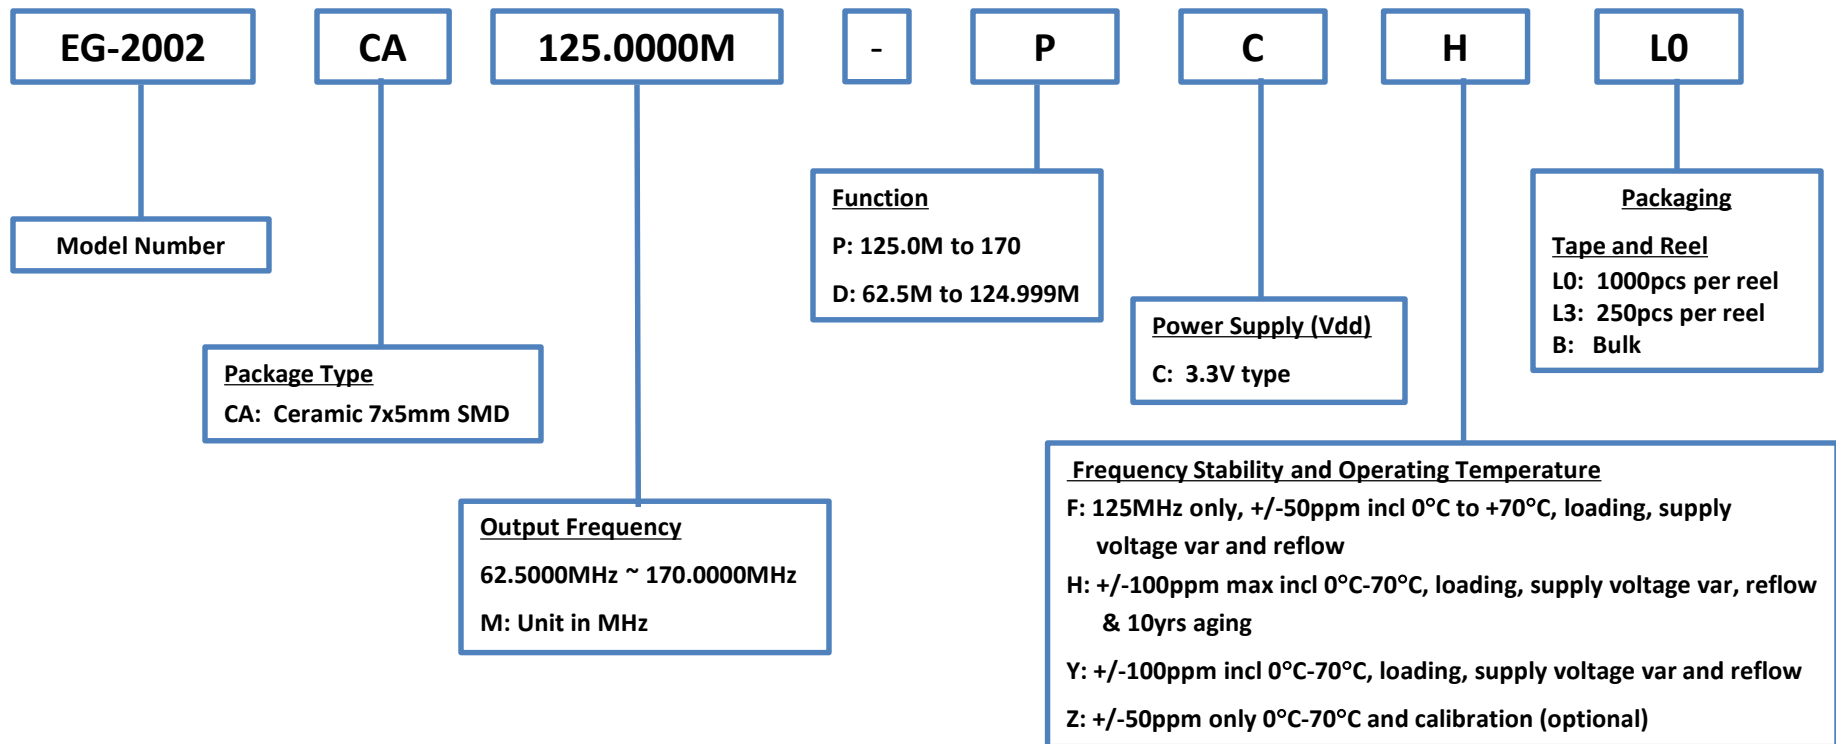

EPSON

June, 2021

Standard Frequencies

EG-2002 (LVTTTL)


EG-2002CA DCx		EG-2002CA PCx	
62.5000	80.5664	125.0000	161.1328
64.0000	83.0000	128.0000	166.0000
66.4063	83.3143	132.8125	166.6286
66.5000	83.3333	133.0000	166.6667
66.6667	83.6658	133.3333	167.3316
67.5000	87.5000	135.0000	
71.5000	90.0000	143.0000	
75.0000	100.0000	150.0000	
77.7600	106.2500	155.5200	
78.1250		156.2500	
79.6875		159.3750	
80.0000		160.0000	

Product Configuration System



Crystal Oscillators – Low Jitter (SAW)

Discontinued

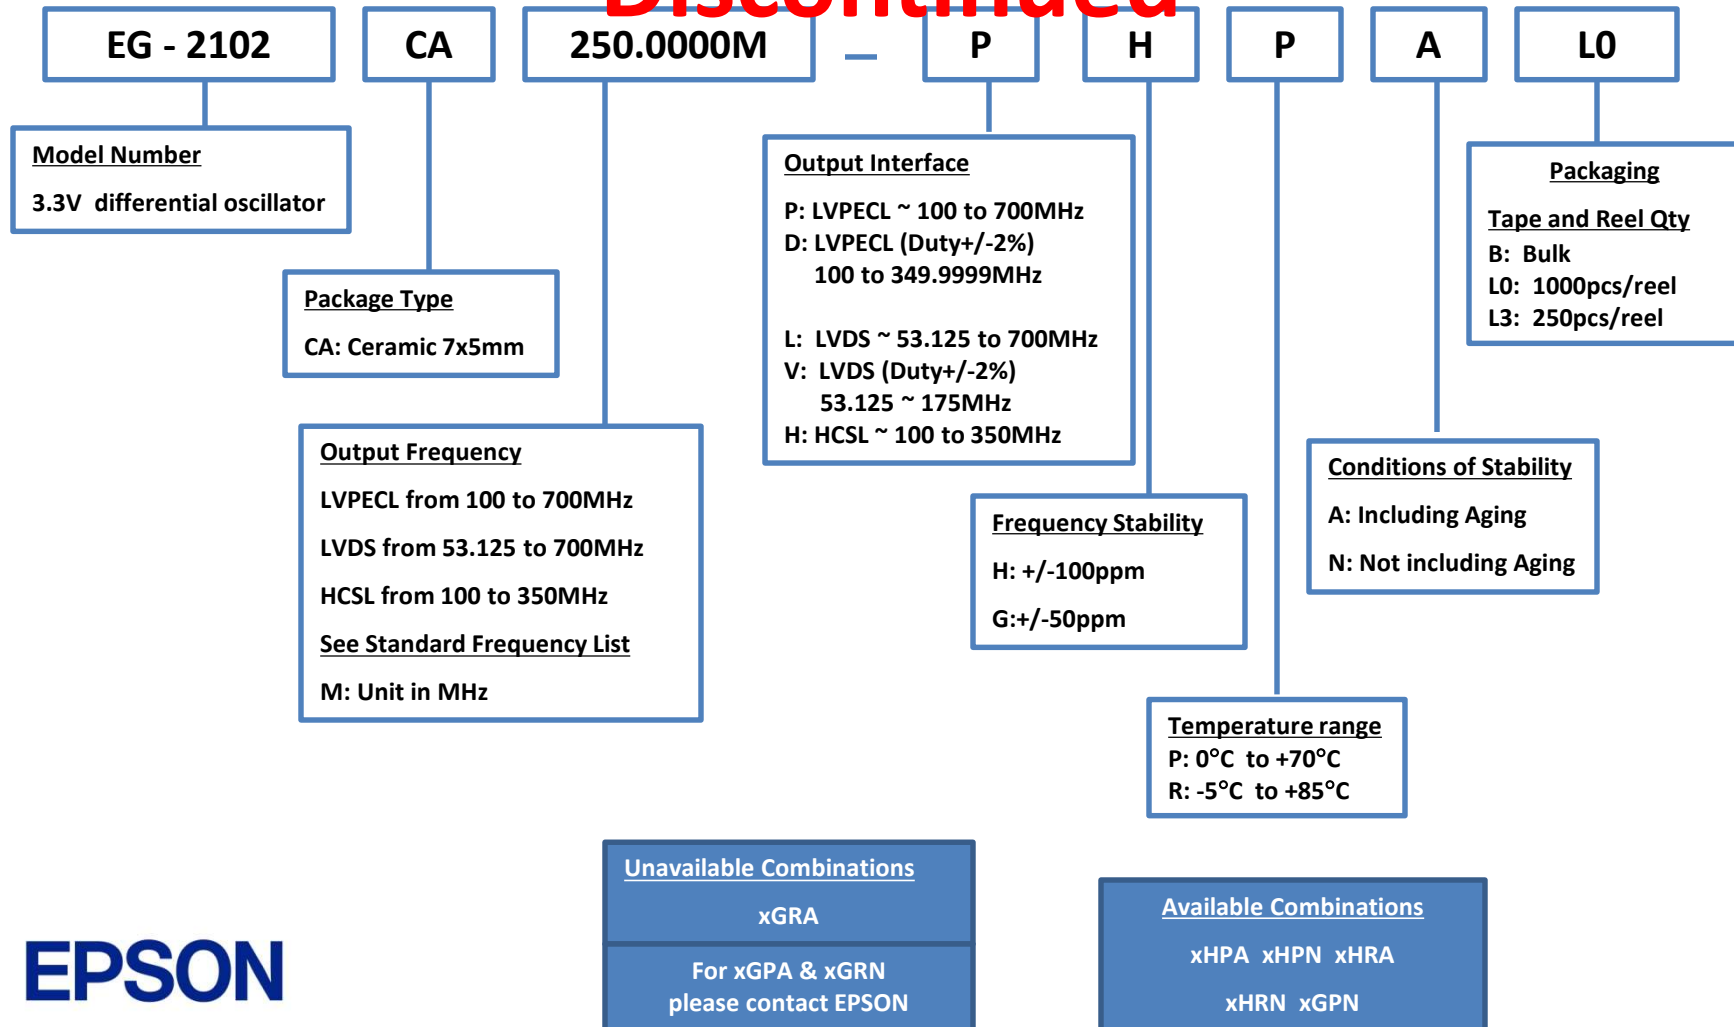


EPSON

June, 2021

Product Configuration System




Crystal Oscillators – Low Jitter (SAW)

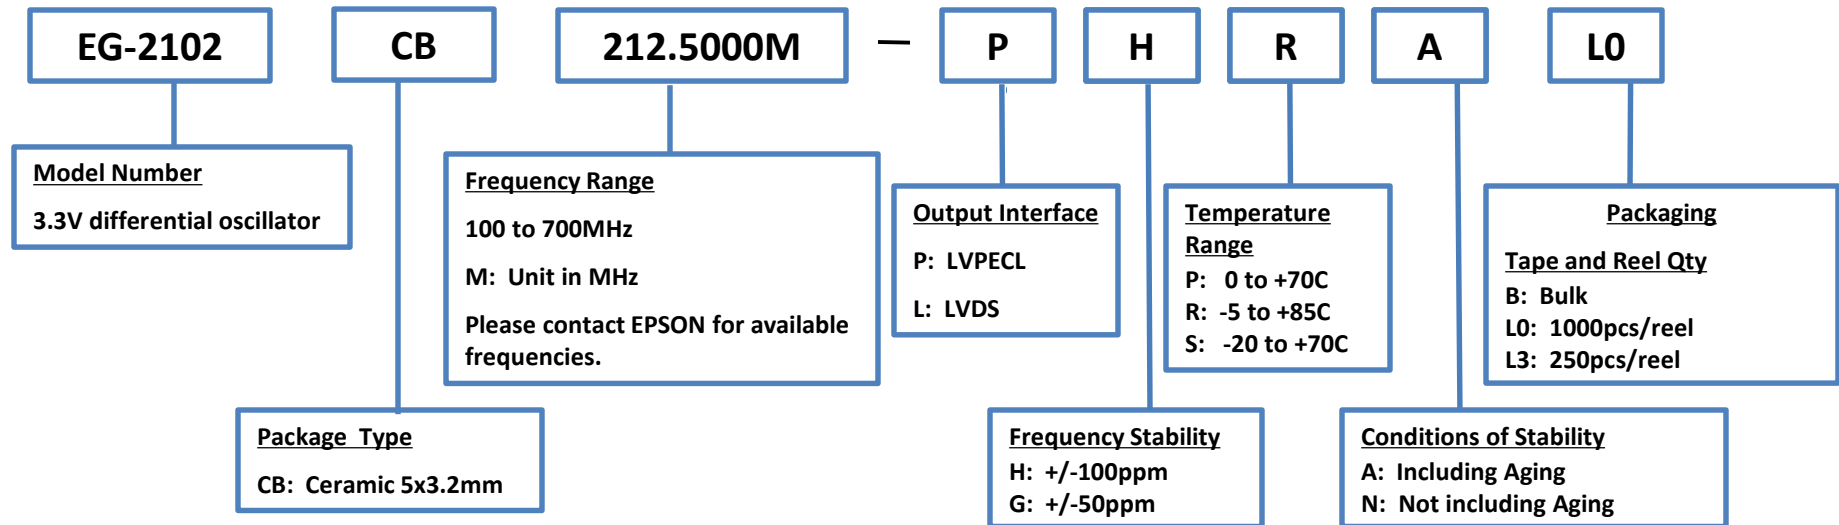

Product Configuration System



Crystal Oscillators – Low Jitter (SAW)

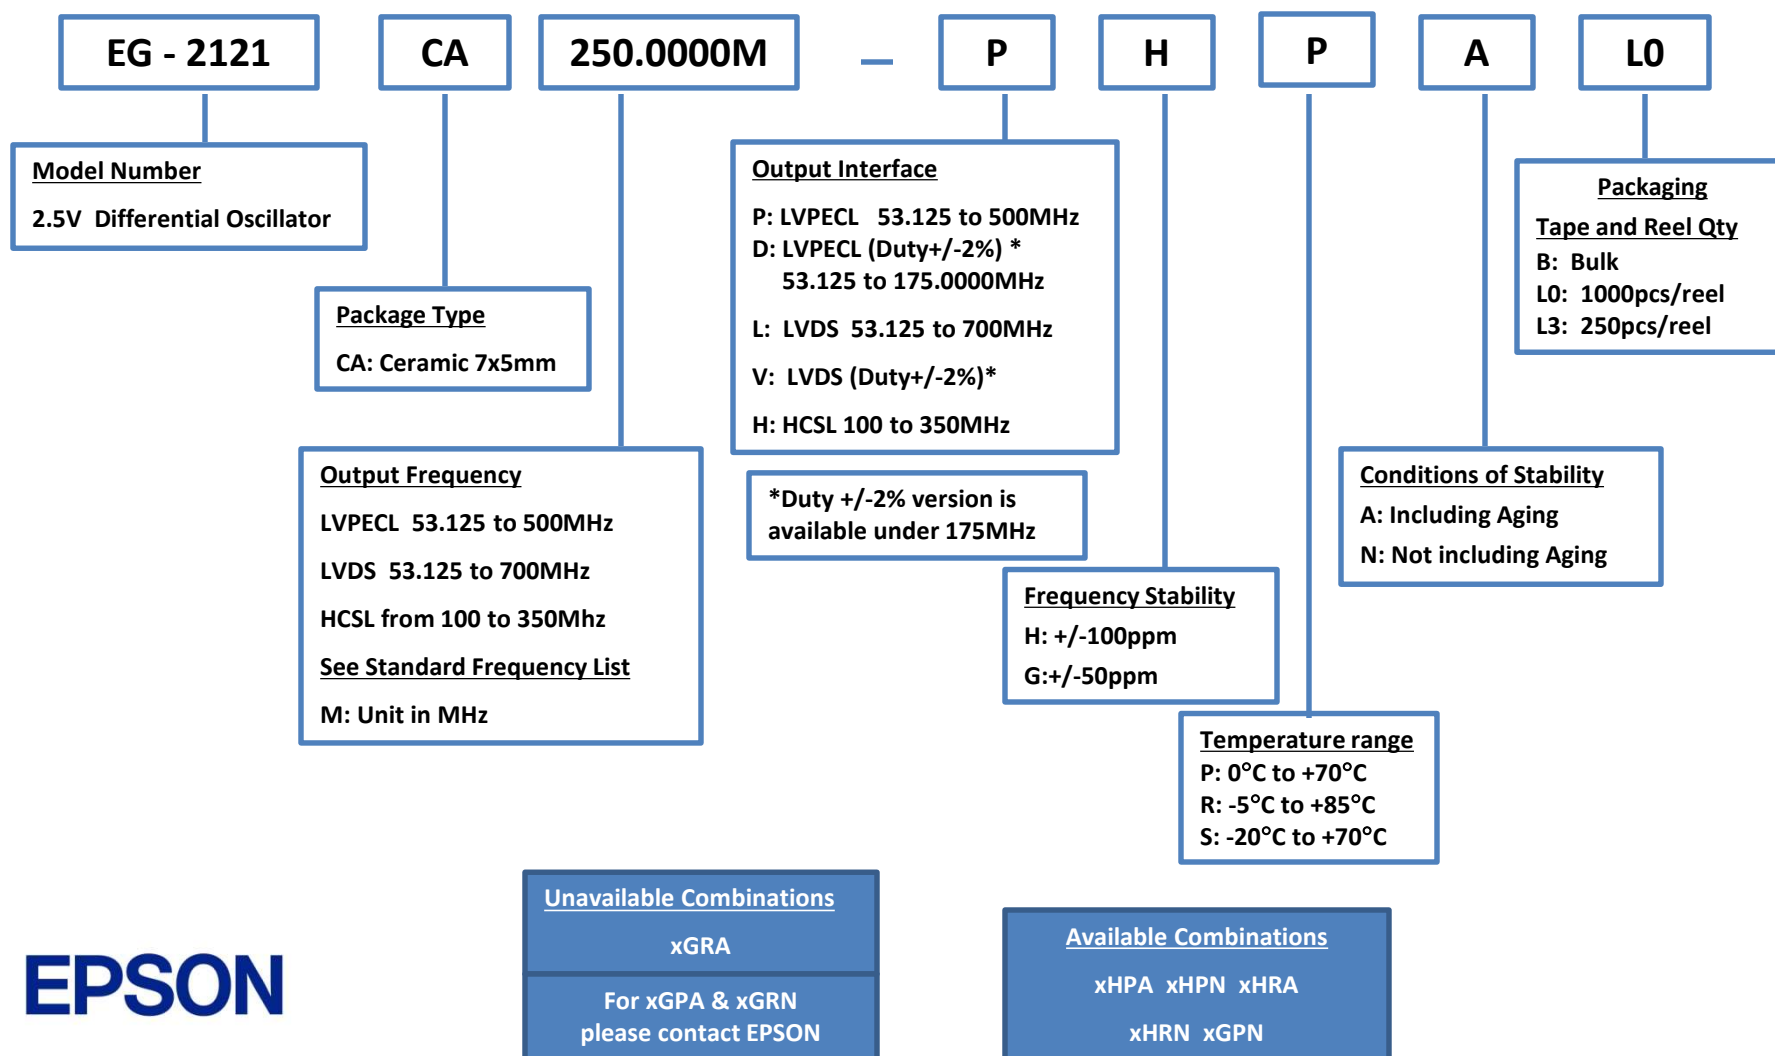

EPSON

June, 2021

Standard Frequencies

EG-2121 P (LVPECL)

53.1250 *	97.6563	195.3125	390.6250
62.5000 *	98.3040	196.6080	393.2160
66.6667 *	100.0000	200.0000	400.0000
75.0000 *	106.2500	212.5000	425.0000
78.1250 *	124.4160	248.8320	497.6640
79.6875 *	125.0000	250.0000	500.0000
80.0000 *	132.8125	265.6250	
87.5000 *	133.0000	266.0000	
	148.3517	296.7033	
	150.0000	300.0000	
	150.8072	301.6144	
	155.5200	311.0400	
	156.2500	312.5000	
	159.3750	318.7500	
	161.1328	322.2657	
	164.3555	328.7110	
	166.6286	333.2572	
	167.3317	334.6633	
	173.3708	346.7415	
	175.0000	350.0000	
* Frequency only available for xHPA and xHPN			

Standard Frequencies

EG-2121 L (LVDS)

53.1250 *	97.6563	195.3125	390.6250
62.5000 *	98.3040	196.6080	393.2160
66.6667 *	100.0000	200.0000	400.0000
75.0000 *	106.2500	212.5000	425.0000
78.1250 *	124.4160	248.8320	497.6640
79.6875 *	125.0000	250.0000	500.0000
80.0000 *	132.8125	265.6250	531.2500
87.5000 *	133.0000	266.0000	532.0000
	148.3517	296.7033	593.4066
	150.0000	300.0000	600.0000
	150.8072	301.6144	603.2288
	156.2500	312.5000	625.0000
	159.3750	318.7500	637.5000
	161.1328	322.2656	644.5313
	164.3555	328.7109	657.4219
	166.6286	333.2571	666.5143
	167.3316	334.6633	669.3266
	173.3707	346.7415	693.4830
	175.0000	350.0000	700.0000
* Frequency only available for xHPA and xHPN			

Standard Frequencies

EG-2121 (HCSL)

-	195.3125
-	196.6080
100.0000	200.0000
106.2500	212.5000
124.4160	248.8320
125.0000	250.0000
132.8125	265.6250
133.0000	266.0000
148.3517	296.7033
150.0000	300.0000
150.8072	301.6144
155.5200	311.0400
156.2500	312.5000
159.3750	318.7500
161.1328	322.2656
164.3555	328.7109
166.6286	333.2571
167.3316	334.6633
173.3707	346.7415
175.0000	350.0000

Standard Frequencies

EG-2102P (LVPECL)

-	195.3125	390.6250
-	196.6080	393.2160
100.0000	200.0000	400.0000
106.2500	212.5000	425.0000
124.4160	248.8320	497.6640
125.0000	250.0000	500.0000
132.8125	265.6250	531.2500
133.0000	266.0000	532.0000
148.3517	296.7033	593.4066
150.0000	300.0000	600.0000
150.8072	301.6144	603.2288
155.5200	311.0400	622.0800
156.2500	312.5000	625.0000
159.3750	318.7500	637.5000
161.1328	322.2656	644.5313
164.3555	328.7109	657.4219
166.6286	333.2571	666.5143
167.3316	334.6633	669.3266
173.3707	346.7415	693.4830
175.0000	350.0000	700.0000

Standard Frequencies

EG-2102 L (LVDS)

53.1250 *	97.6563	195.3125	390.6250
62.5000 *	98.3040	196.6080	393.2160
66.6667 *	100.0000	200.0000	400.0000
75.0000 *	106.2500	212.5000	425.0000
78.1250 *	124.4160	248.8320	497.6640
79.6875 *	125.0000	250.0000	500.0000
80.0000 *	132.8125	265.6250	531.2500
87.5000 *	133.0000	266.0000	532.0000
	148.3517	296.7033	593.4066
	150.0000	300.0000	600.0000
	150.8072	301.6144	603.2288
	155.5200	311.0400	622.0800
	156.2500	312.5000	625.0000
	159.3750	318.7500	637.5000
	161.1328	322.2656	644.5313
	164.3555	328.7109	657.4219
	166.6286	333.2571	666.5143
	167.3316	334.6633	669.3266
	173.3707	346.7415	693.4830
	175.0000	350.0000	700.0000
* Frequency only available for xHPA and xHPN			

Standard Frequencies

EG-2102P (HCSL)


-	195.3125
-	196.6080
100.0000	200.0000
106.2500	212.5000
124.4160	248.8320
125.0000	250.0000
132.8125	265.6250
133.0000	266.0000
148.3517	296.7033
150.0000	300.0000
150.8072	301.6144
155.5200	311.0400
156.2500	312.5000
159.3750	318.7500
161.1328	322.2656
164.3555	328.7109
166.6286	333.2571
167.3316	334.6633
173.3707	346.7415
175.0000	350.0000



Product Configuration System



Crystal Oscillators – Low Jitter (SAW)

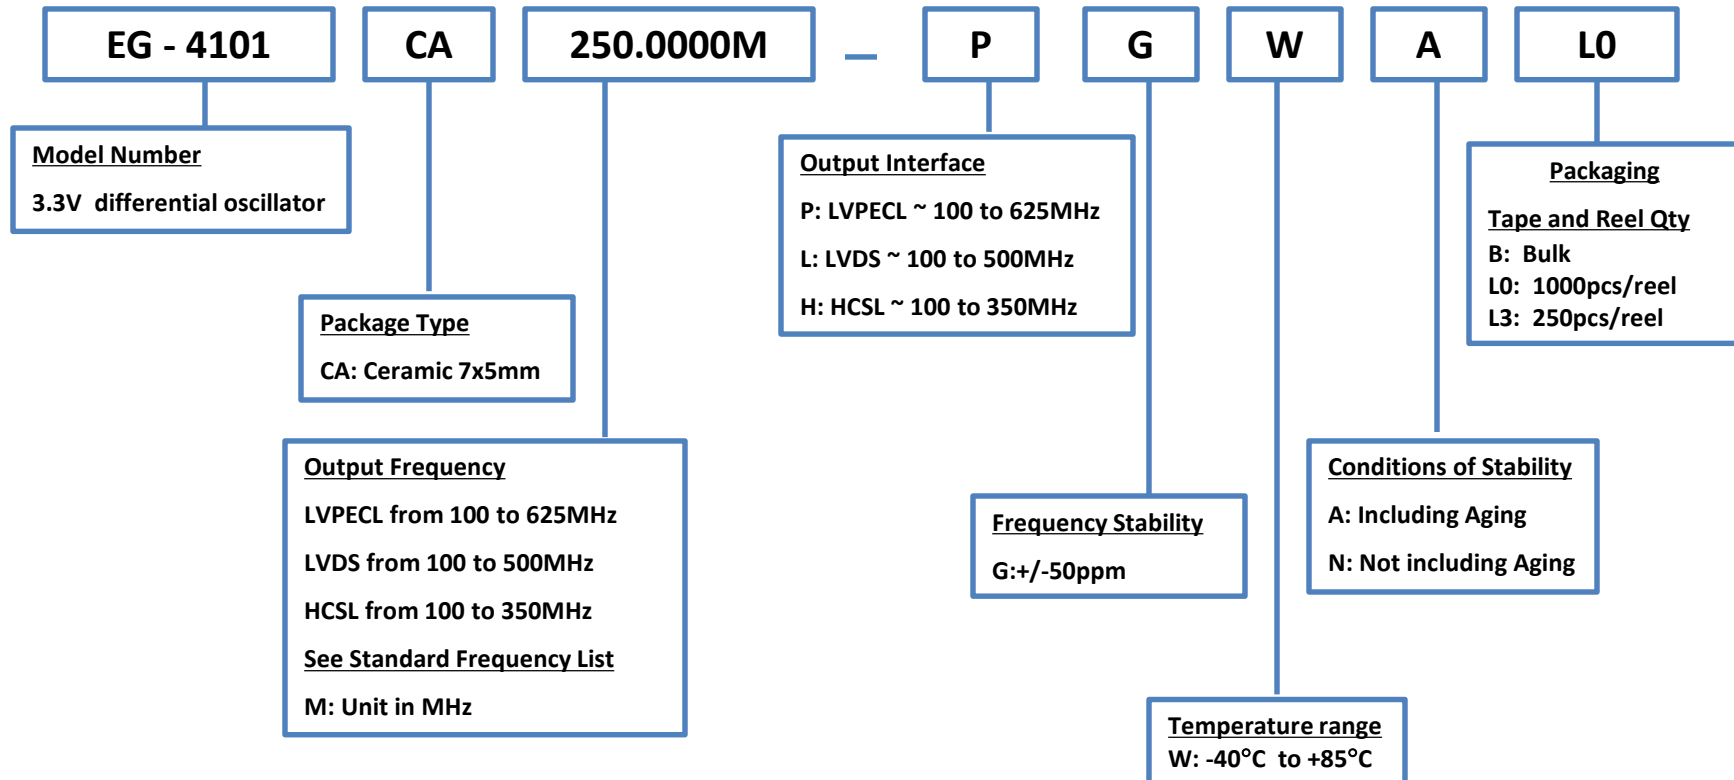

Standard Frequencies

EG-4101 (LVPECL)

100.0000	400.0000	
106.2500	425.0000	
121.1090	484.4360	
133.0000	532.0000	
140.0000	560.0000	
140.6665	562.6660	
156.2500	625.0000	
161.1320		
168.0407		
170.0000		
200.0000		
212.5000		
242.2180		
266.0000		
280.0000		
281.3330		
312.5000		
322.2640		
336.0814		
340.0000		

Standard Frequencies

EG-4101 (LVDS)

100.0000	400.0000	
106.2500	425.0000	
121.1090	484.4360	
133.0000		
140.0000		
140.6665		
156.2500		
161.1320		
168.0407		
170.0000		
200.0000		
212.5000		
242.2180		
266.0000		
280.0000		
281.3330		
312.5000		
322.2640		
336.0814		
340.0000		

Standard Frequencies


EG-4101 (HCSL)

100.0000		
106.2500		
121.1090		
133.0000		
140.0000		
140.6665		
156.2500		
161.1320		
168.0407		
170.0000		
200.0000		
212.5000		
242.2180		
266.0000		
280.0000		
281.3330		
312.5000		
322.2640		
336.0814		
340.0000		

Product Configuration System



Crystal Oscillators – Low Jitter (SAW)

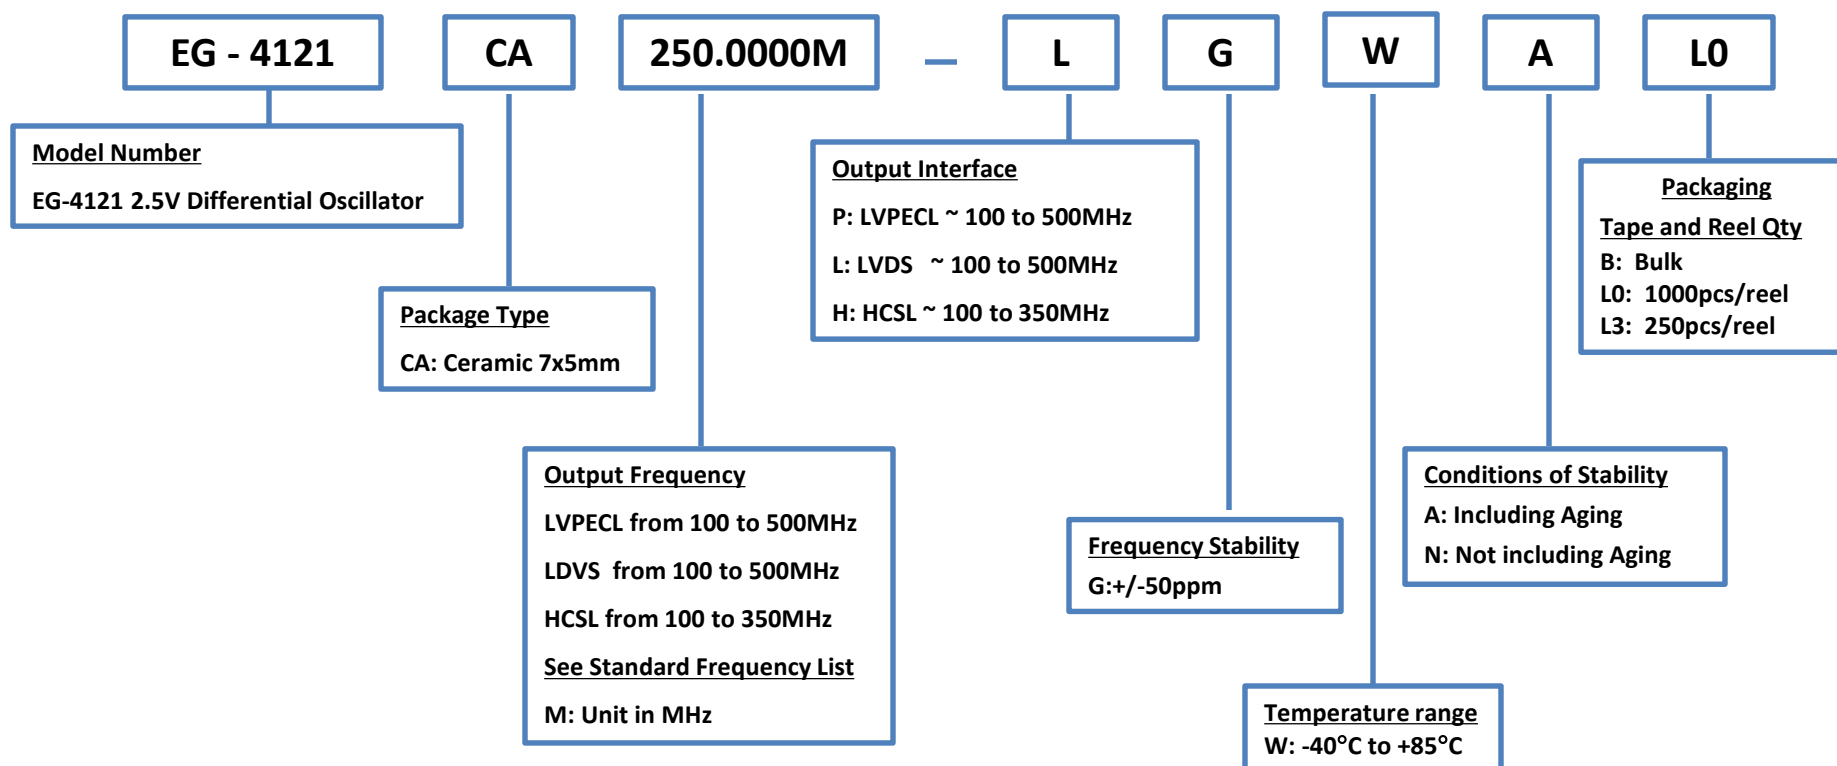

Standard Frequencies

EG-4101 (LVPECL)

100.0000	400.0000	
106.2500	425.0000	
121.1090	484.4360	
133.0000		
140.0000		
140.6665		
156.2500		
161.1320		
168.0407		
170.0000		
200.0000		
212.5000		
242.2180		
266.0000		
280.0000		
281.3330		
312.5000		
322.2640		
336.0814		
340.0000		

Standard Frequencies

EG-4101 (LVDS)

100.0000	400.0000	
106.2500	425.0000	
121.1090	484.4360	
133.0000		
140.0000		
140.6665		
156.2500		
161.1320		
168.0407		
170.0000		
200.0000		
212.5000		
242.2180		
266.0000		
280.0000		
281.3330		
312.5000		
322.2640		
336.0814		
340.0000		

Standard Frequencies

EG-4101 (HCSL)

100.0000		
106.2500		
121.1090		
133.0000		
140.0000		
140.6665		
156.2500		
161.1320		
168.0407		
170.0000		
200.0000		
212.5000		
242.2180		
266.0000		
280.0000		
281.3330		
312.5000		
322.2640		
336.0814		
340.0000		

High-Frequency Applications for SAW Oscillators

- 75.000M Serial ATA/SAS
- 98.304M 1394b
- 100.000M PCI-Express, Serial ATA
- 106.250M Fibre Channel
- 125.000M 1GbEthernet; iSCSI, Infiniband, Hypertransport, PCI-express
- 133.000M Bus/Mem Clock, CPU
- 133.333M FB DIMM
- 150.000M Serial ATA, Serial SCSI
- 155.520M SONET OC-48
- 156.250M 10GbEthernet XAUI
- 159.375M 10GbFibre Channel XAUI
- 161.132M 10GbEthernet SERDES
- 164.355M 10GbFibre Channel SERDES
- 166.000M Bus/Mem Clock
- 200.000M Bus/Mem Clock
- 212.500M 4G Fibre Channel, 8Gb Fibre Channel, FCoE
- 250.000M Infiniband, High Speed Bus
- 312.500M 10GbE
- 500.000M High Speed Bus
- 622.080M SONET OC-192
- 625.000M 10GbEthernet XAUI, High Speed Bus
- 644.531M 10GbEthernet SERDES
- 669.326M SONET OC-192 Digital Wrapper


High Frequency Oscillator Applications

XO / SO (MHz)			VCXO / VCSO (MHz)		
Fibre Channel	FC-2	106.2	SONET	OC-3/12	19.44*
	FC-4/-8	212.5 / 425		OC-3/12	38.88*
	FC-10	159.375		OC-3/12/48	77.76*
Ethernet	GigE	125		OC-3	155.52*
	10 GigE/Infiniband	125 / 250		w/ FEC	166.6286
	XAUI	156.25		w/ FEC	167.3316
	XAUI2	312.5		OC-6	311.04*
	10 GigE PHY	161.1328		w/ FEC	333.2572
		322.2656		w/ FEC	334.6632
PCI-Express	Phase 1	100		OC-12	622.08
	Phase 2	200		w/ FEC	666.5144
	Phase 3	400		w/ FEC	669.3264
Storage	SATA 1	75 / 150		OC-48	2488.32
	SATA 2	150 / 300			
	SAS 1	75 / 150			
	SAS 2	150 / 300			
Computer	Bus / Mem Clock	100 / 125 / 133.33 / 166.66 200 / 266.67			* XO / SO also

Product Configuration System




Crystal Oscillators – Low Jitter (SAW)

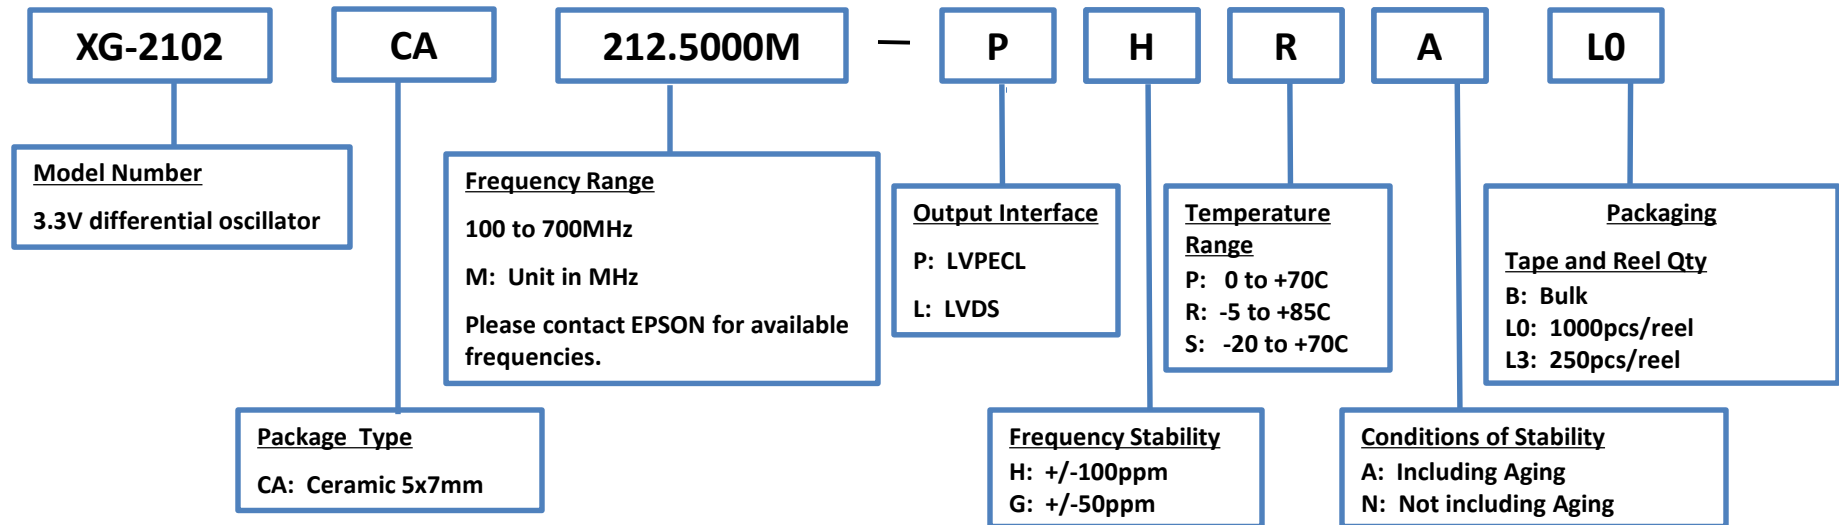

Product Configuration System




Crystal Oscillators – Low Jitter (SAW)

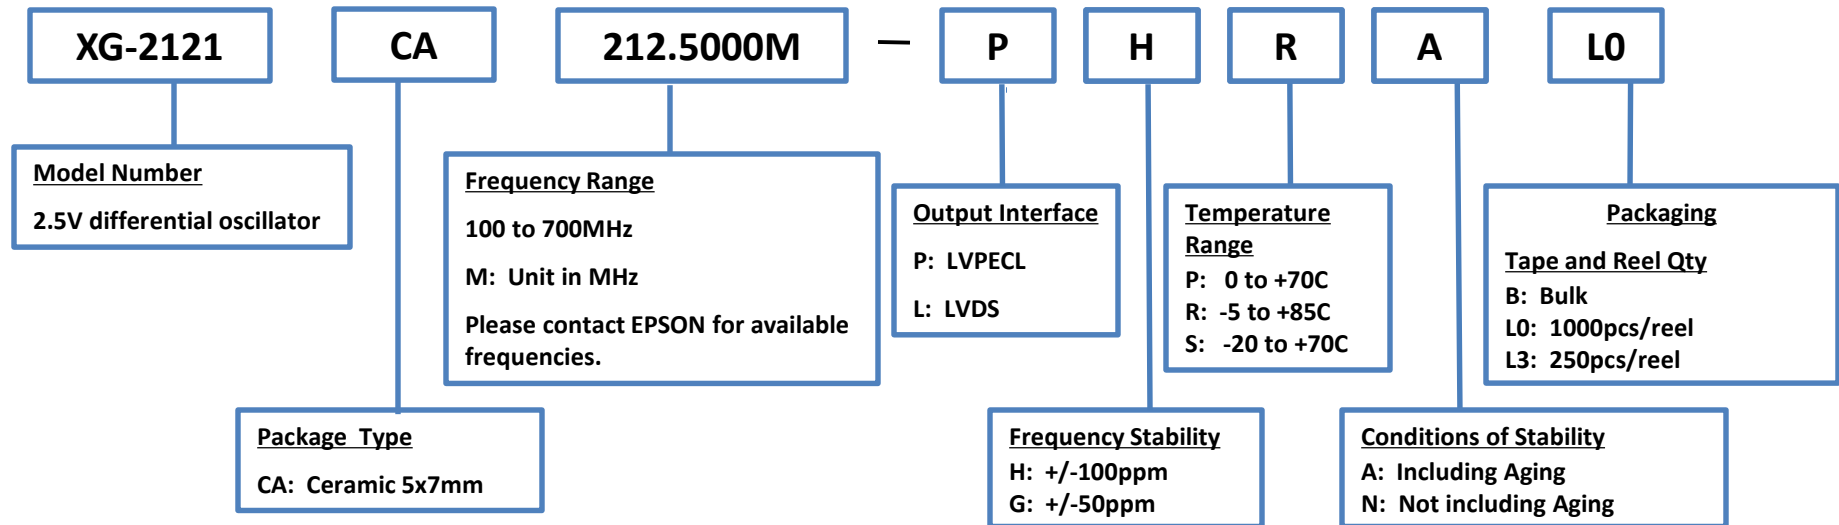

Product Configuration System



Low-Jitter SAW Oscillator (SPSO)

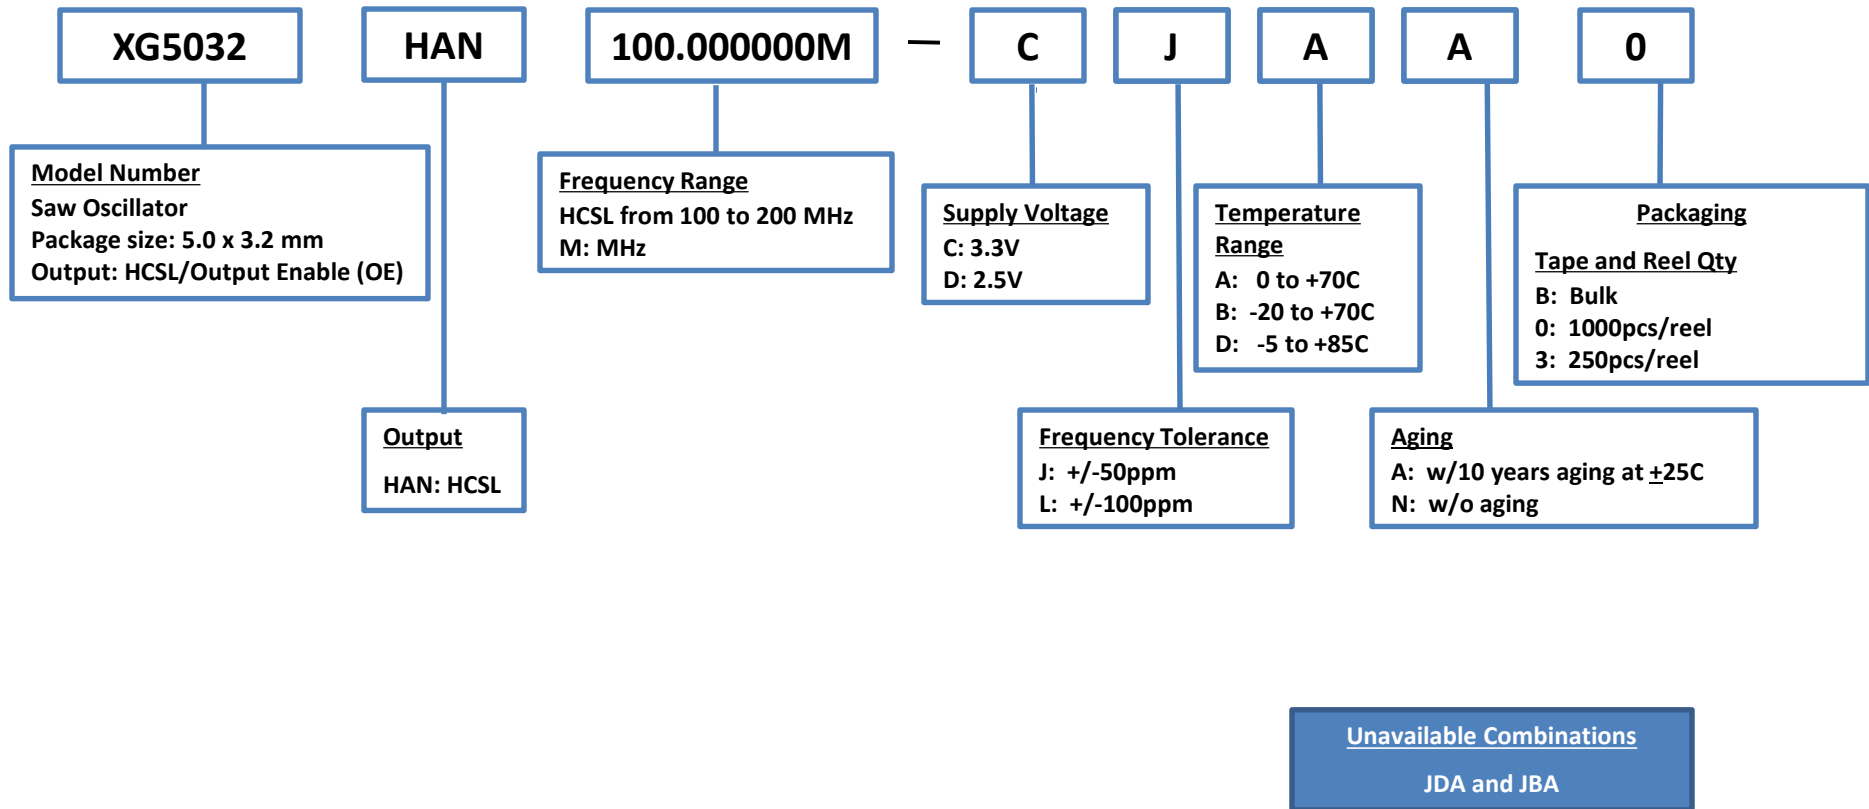

Product Configuration Guide

Programmable Oscillators



EPSON


June, 2021

118

Product Configuration System




Crystal Oscillator (SPXO) – Programmable

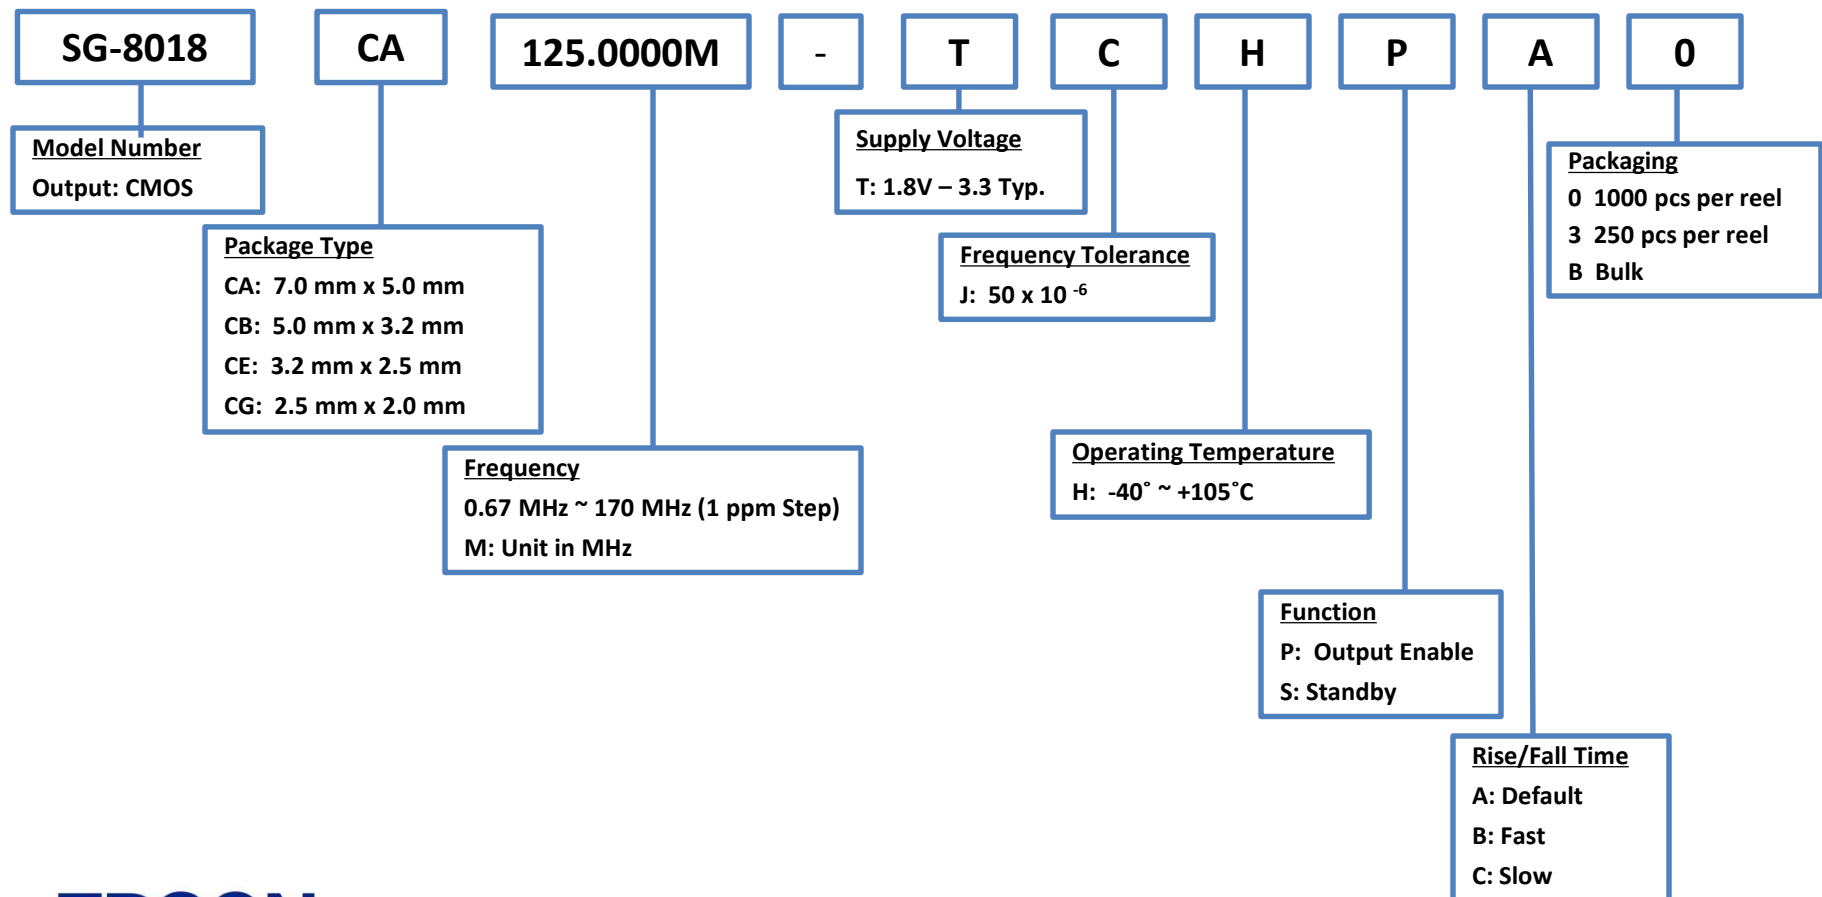

Product Configuration System



Crystal Oscillator (SPXO) – Programmable, High Performance

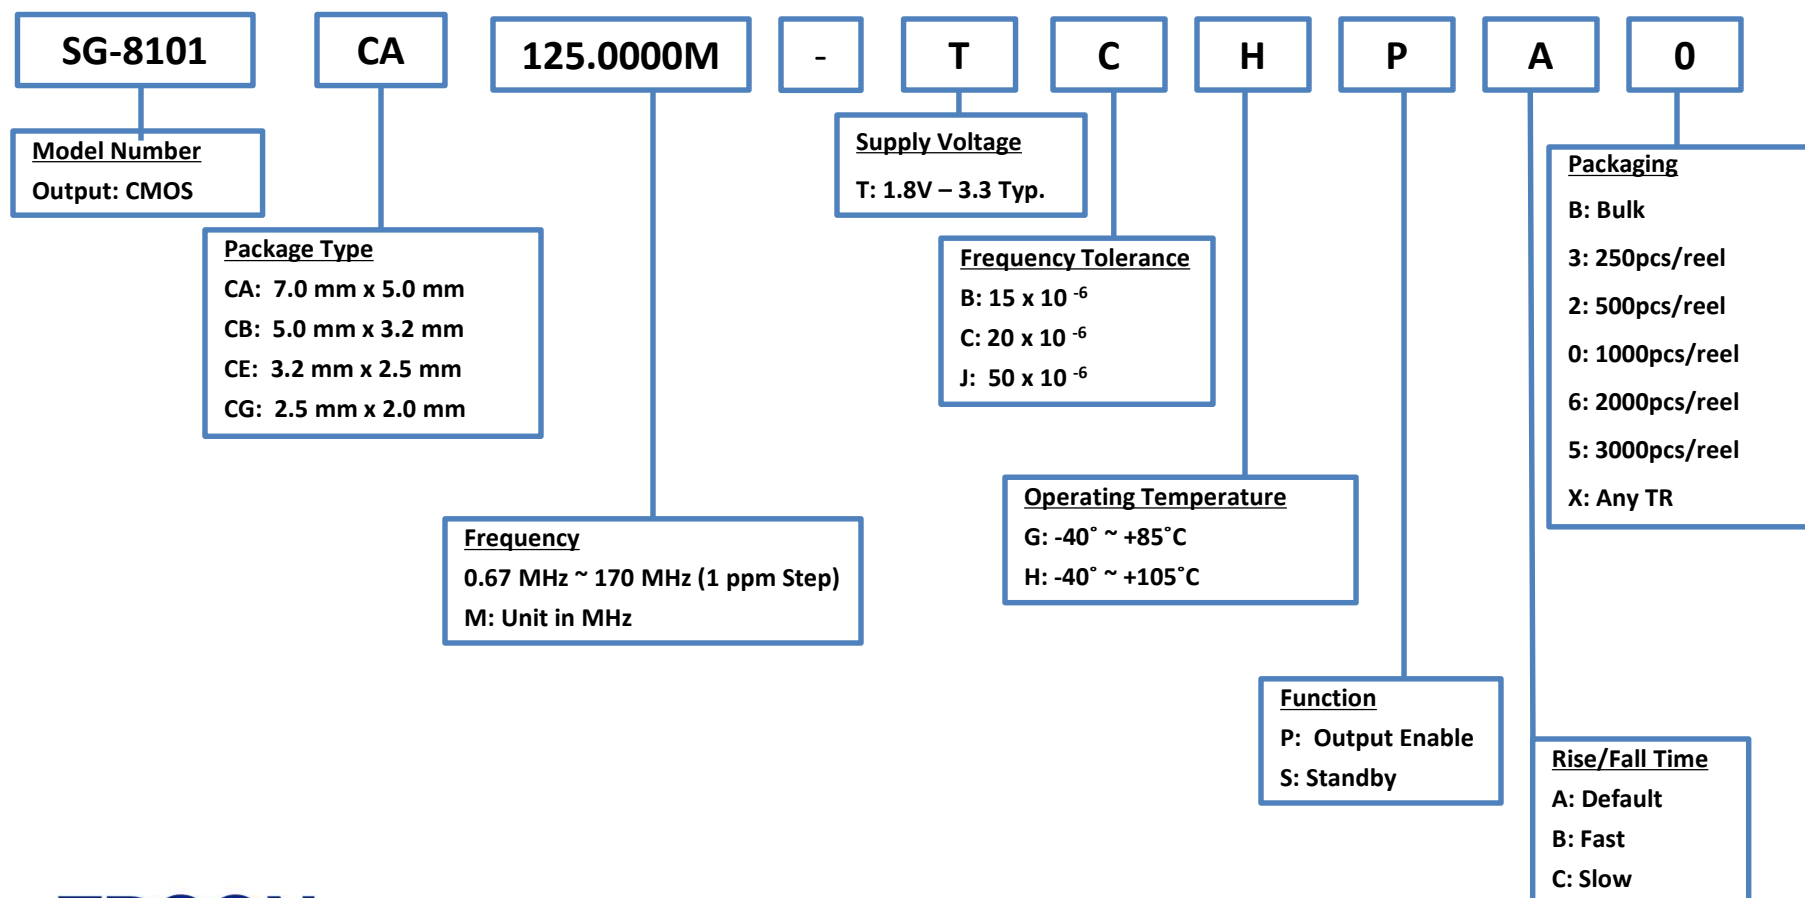

EPSON

June, 2021

NOTE:

See next page for available combinations

Product Configuration System



Crystal Oscillator (SPXO) – Programmable, High Performance


SG-8101 Available Combinations

Available combination		CA: 7.0 mm x 5.0 mm			CB: 5.0 mm x 3.2 mm			CE: 3.2 mm x 2.5 mm			CG: 2.5 mm x 2.0 mm		
Frequency tolerance		B: 15 x 10 ⁻⁶	C: 20 x 10 ⁻⁶	J: 50 x 10 ⁻⁶	B: 15 x 10 ⁻⁶	C: 20 x 10 ⁻⁶	J: 50 x 10 ⁻⁶	B: 15 x 10 ⁻⁶	C: 20 x 10 ⁻⁶	J: 50 x 10 ⁻⁶	B: 15 x 10 ⁻⁶	C: 20 x 10 ⁻⁶	J: 50 x 10 ⁻⁶
Operating temperature	G: -40 °C ~ +85 °C	✓			✓			✓			✓		
	H: -40 °C ~ +105 °C		✓	✓		✓	✓		✓	✓		✓	✓

Product Configuration System



Crystal Oscillator (SPXO) – Programmable, High Performance, Automotive (AECQ100)

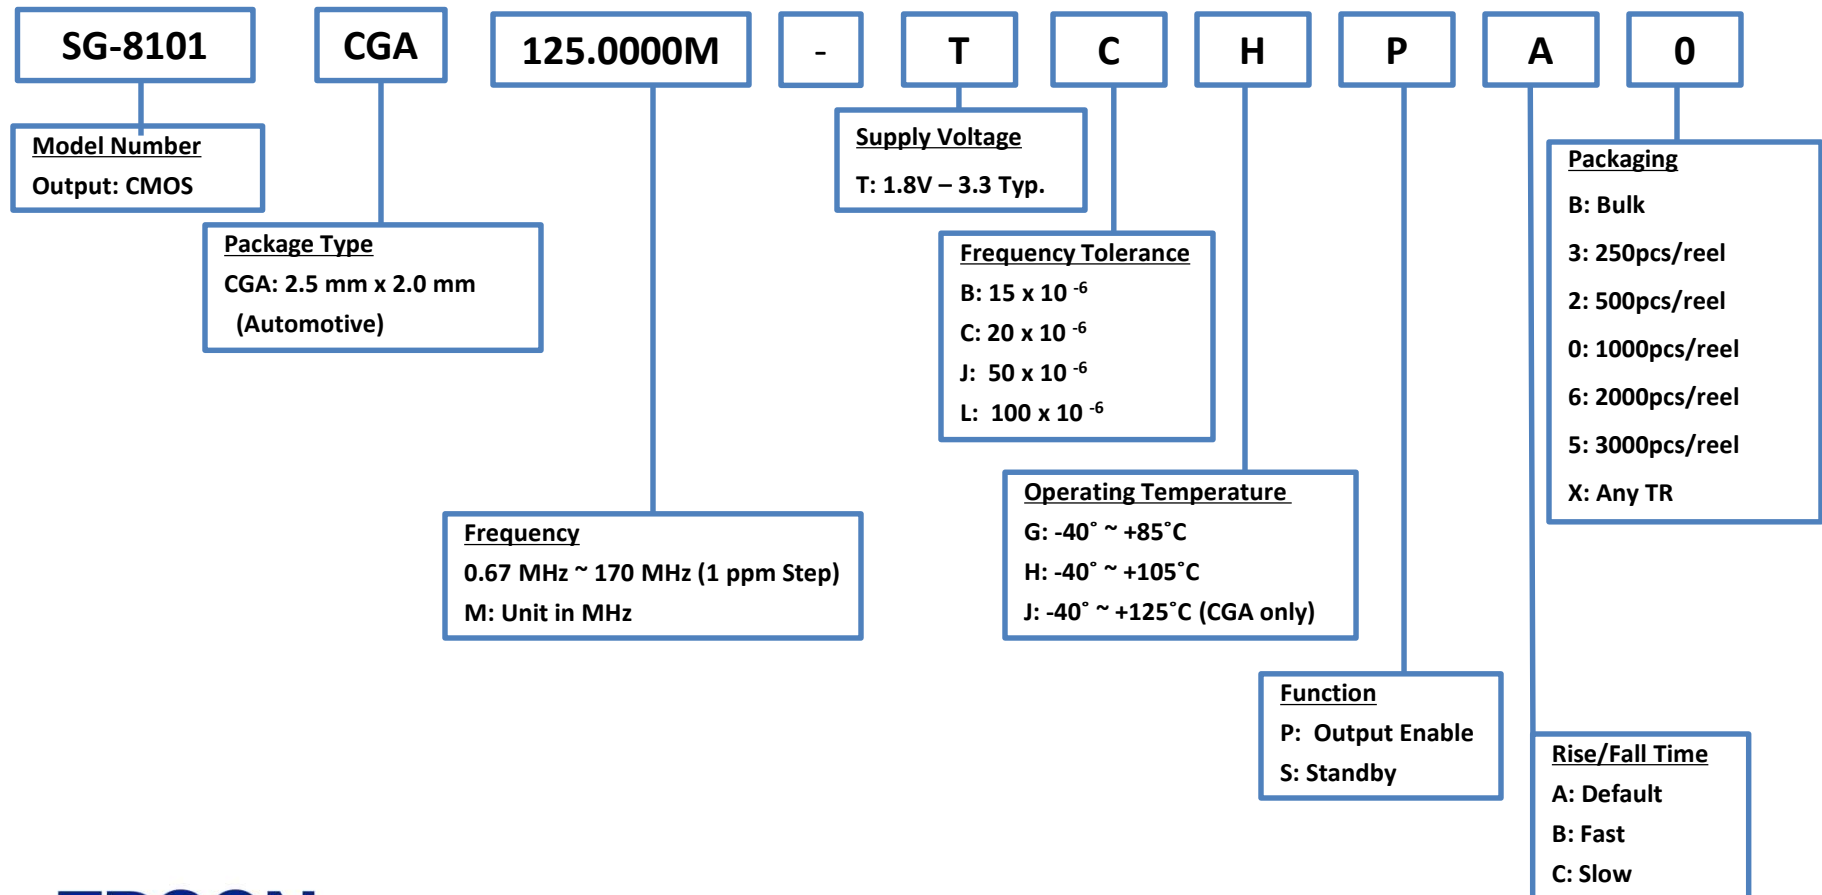

EPSON

June, 2021


NOTE:

For Automotive SG-8101CGA, stability “JJ” (+/-50ppm -40/125C) and “LJ” (+/-100ppm -40/125C) are available. See previous slide for other possible combination.

Product Configuration System



Crystal Oscillators - Programmable

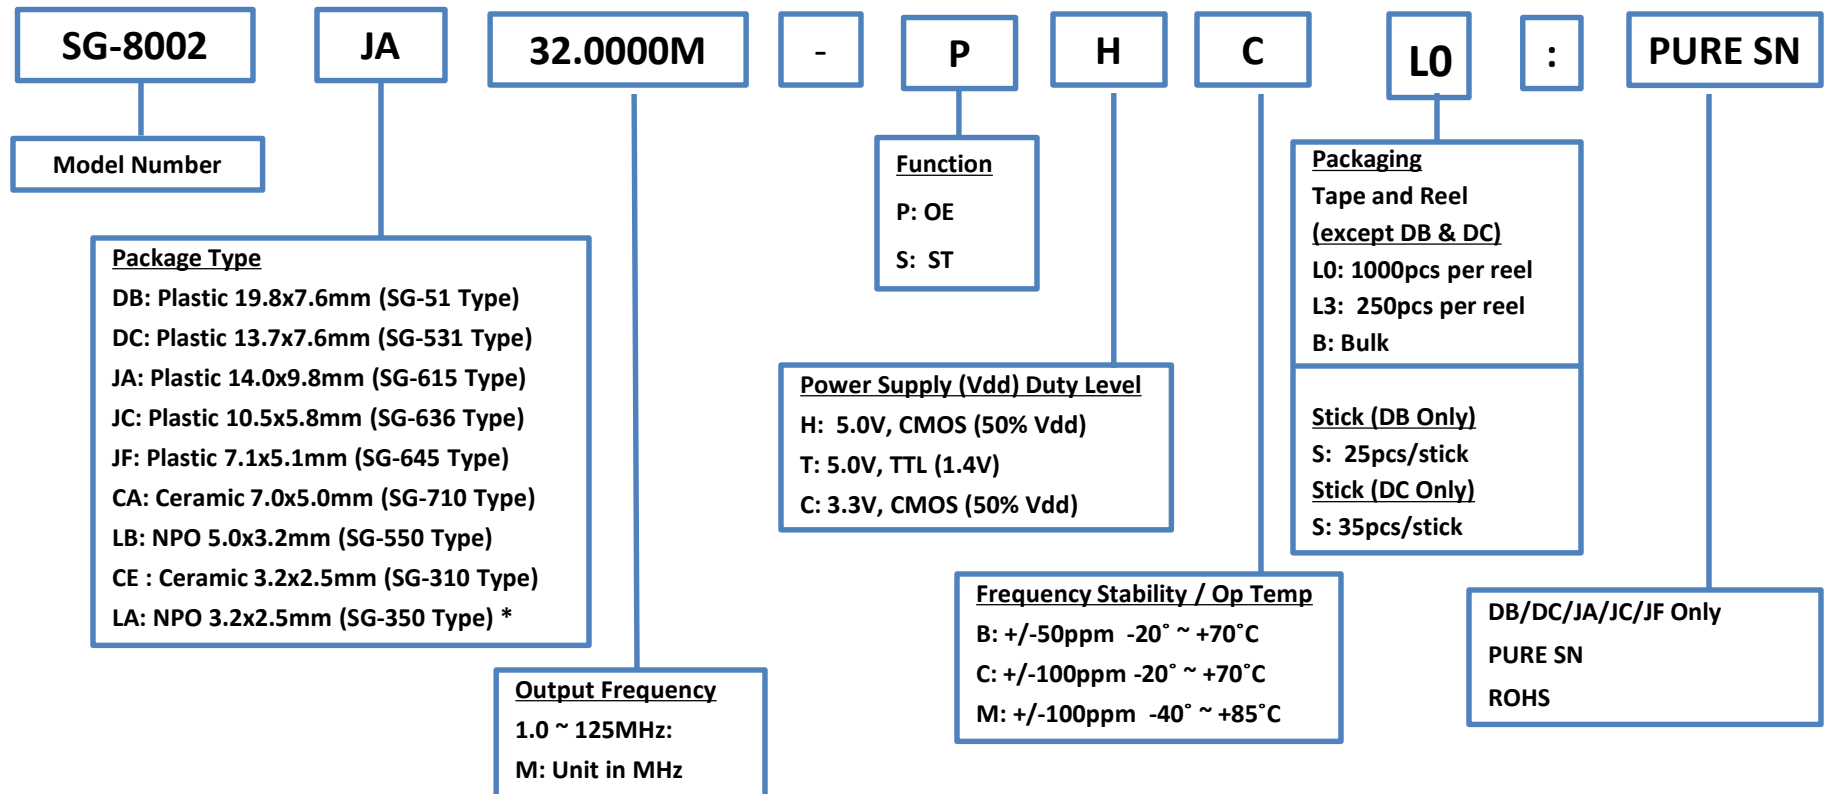

EPSON

June, 2021

***SG-8002LA & SG-8002DB:
Not Recommended for New Designs**


NOTE:
Complete Pb Free:
SG-8002CA/CE
SG-8002LA/LB

Product Configuration System



Crystal Oscillators - Programmable

Discontinued

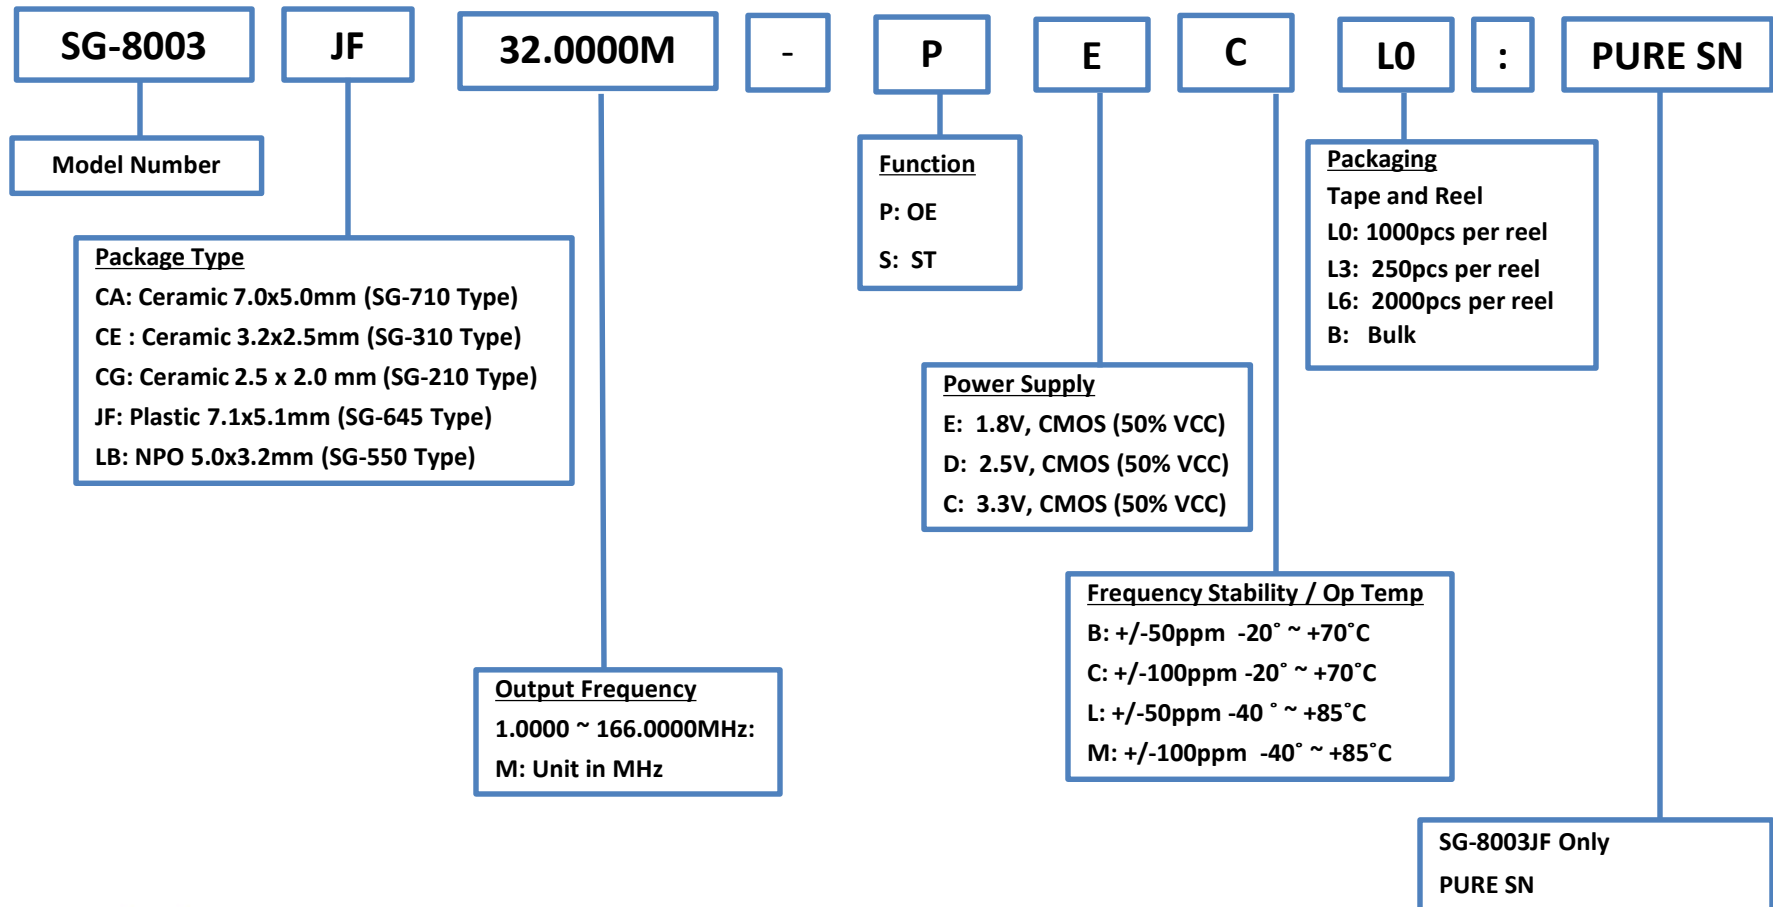


EPSON

Product Configuration System



Dual Selectable Crystal Oscillator (SPXO) Programmable (Dual Frequencies Available)

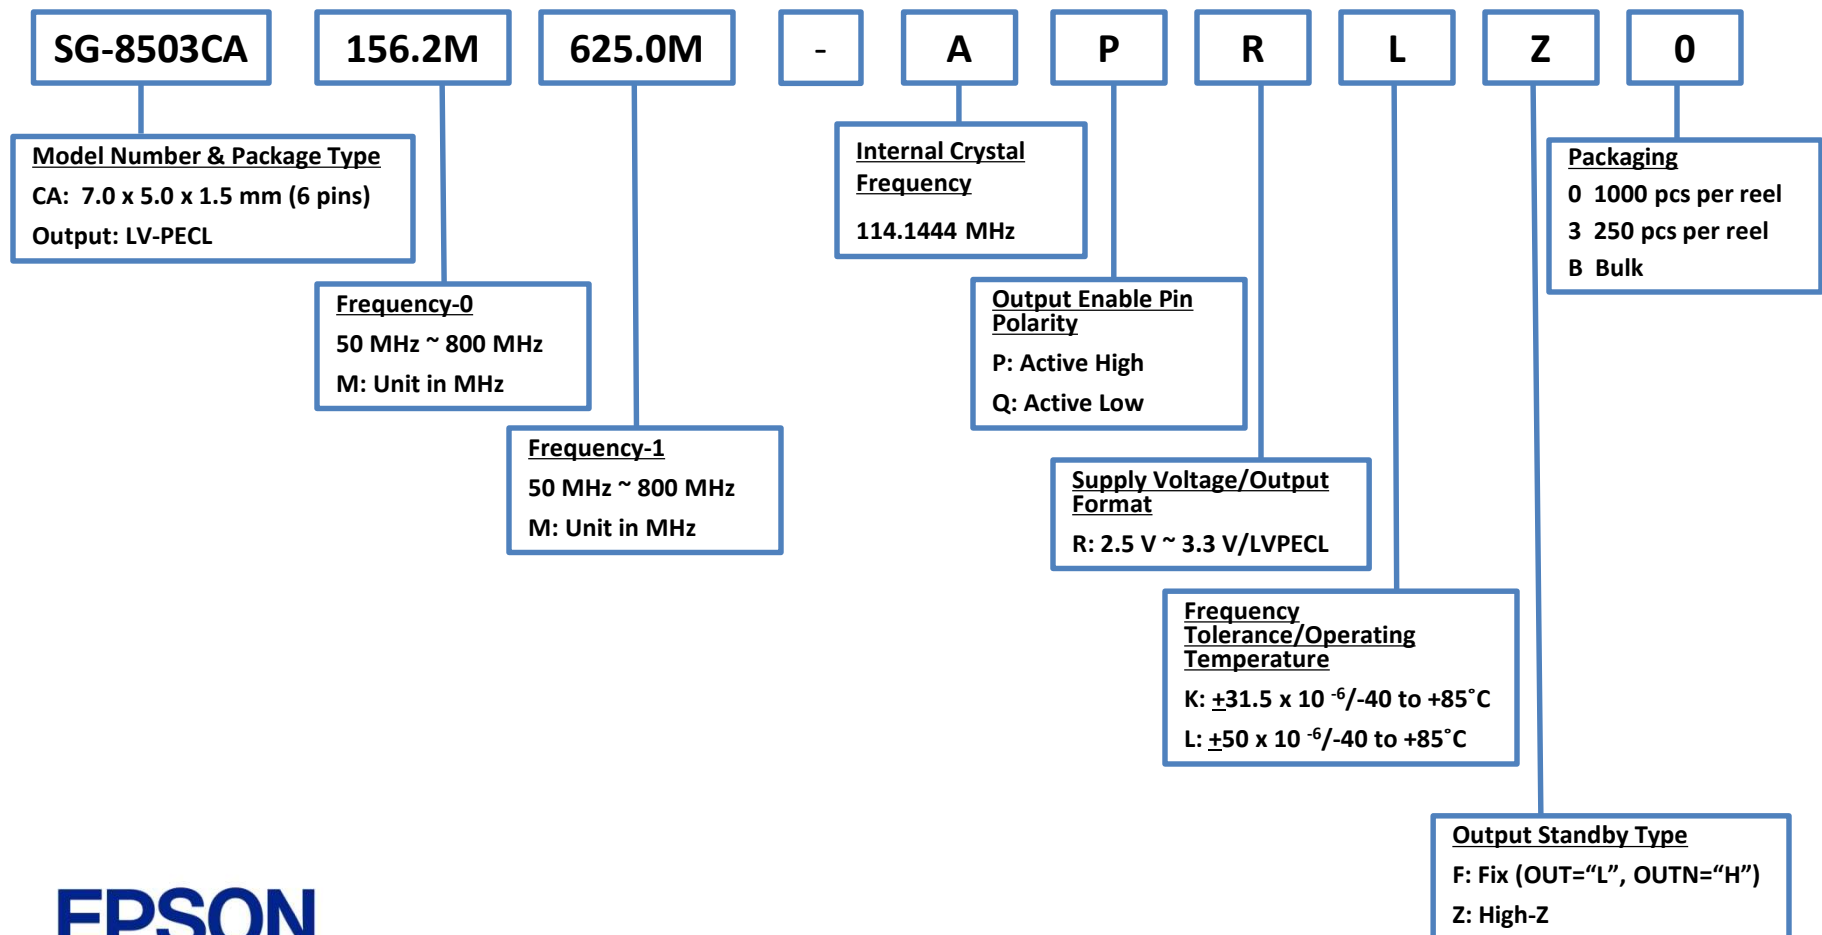

EPSON


June, 2021

125

Product Configuration System



Quad Selectable Crystal Oscillator (SPXO) Programmable (Quad Frequencies Available)

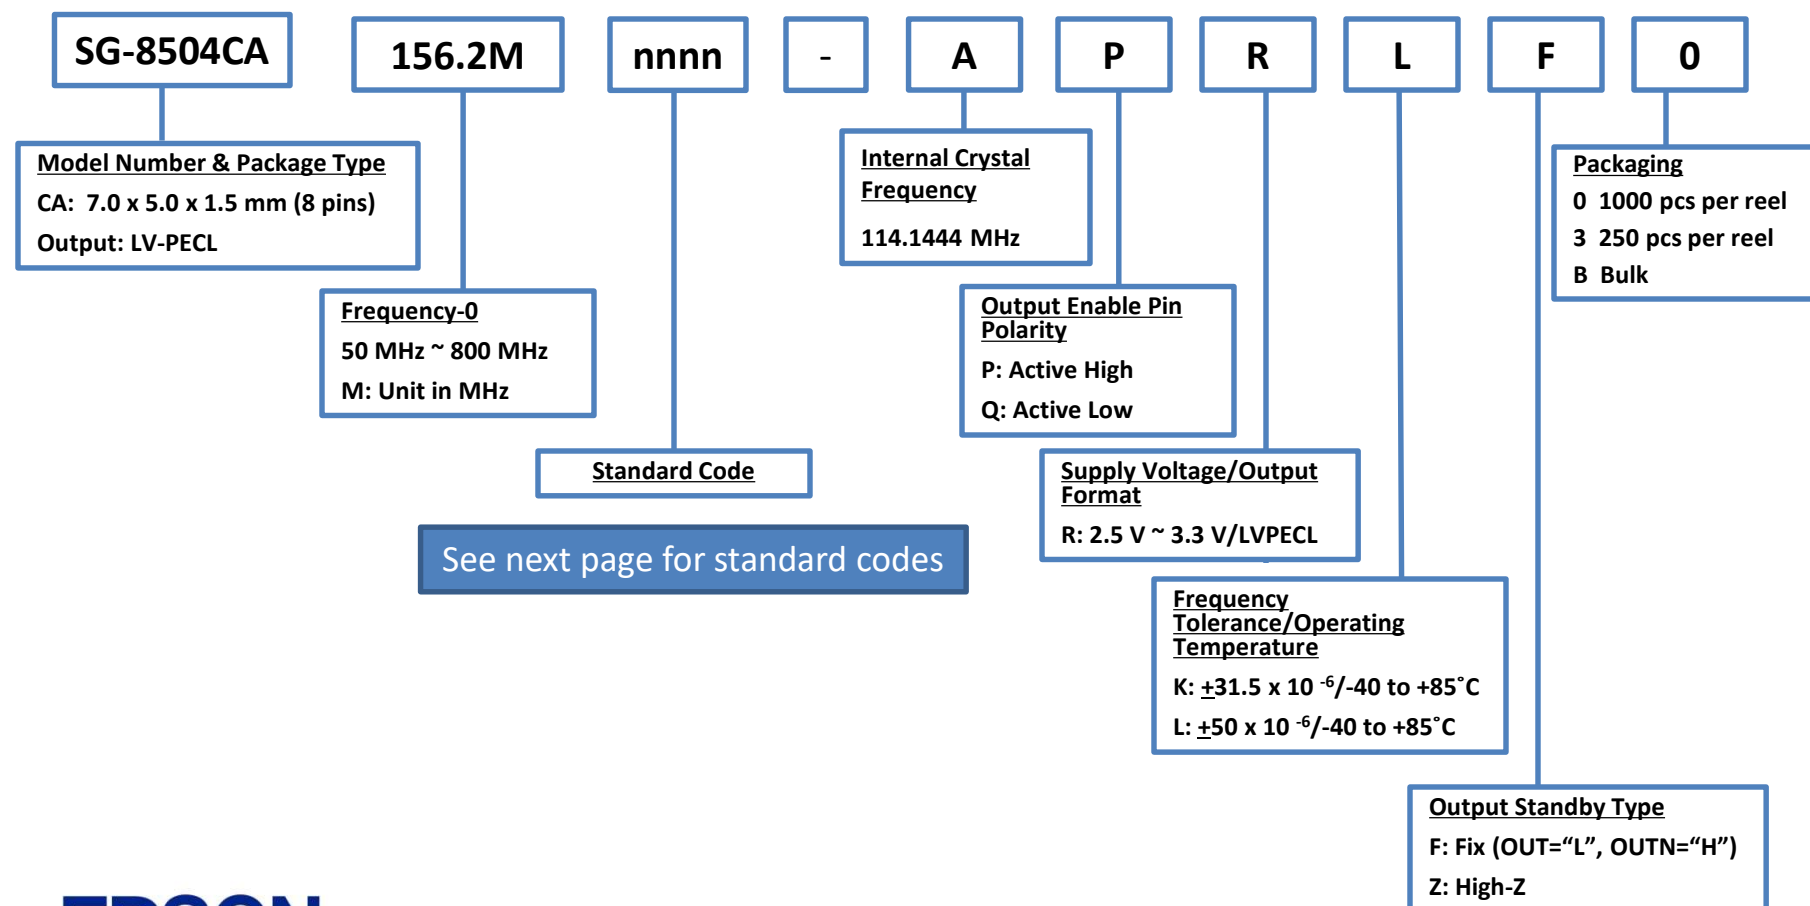

Product Configuration System



Quad Selectable Crystal Oscillator (SPXO) Programmable (Quad Frequencies Available)


SG-8504 Standard Codes

<u>Standard Code</u> (‘nnnn’)	Frequency 0	Frequency 1	Frequency 2	Frequency 3
0007	75.00000	100.00000	150.00000	250.00000
0008	62.50000	125.00000	156.25000	250.00000
0009	106.25000	159.37500	212.50000	425.00000
0010	100.00000	133.33333	166.66666	200.00000
0011	100.00000	125.00000	156.25000	312.50000

Product Configuration System



User Programmable I²C Crystal Oscillator (SPXO)

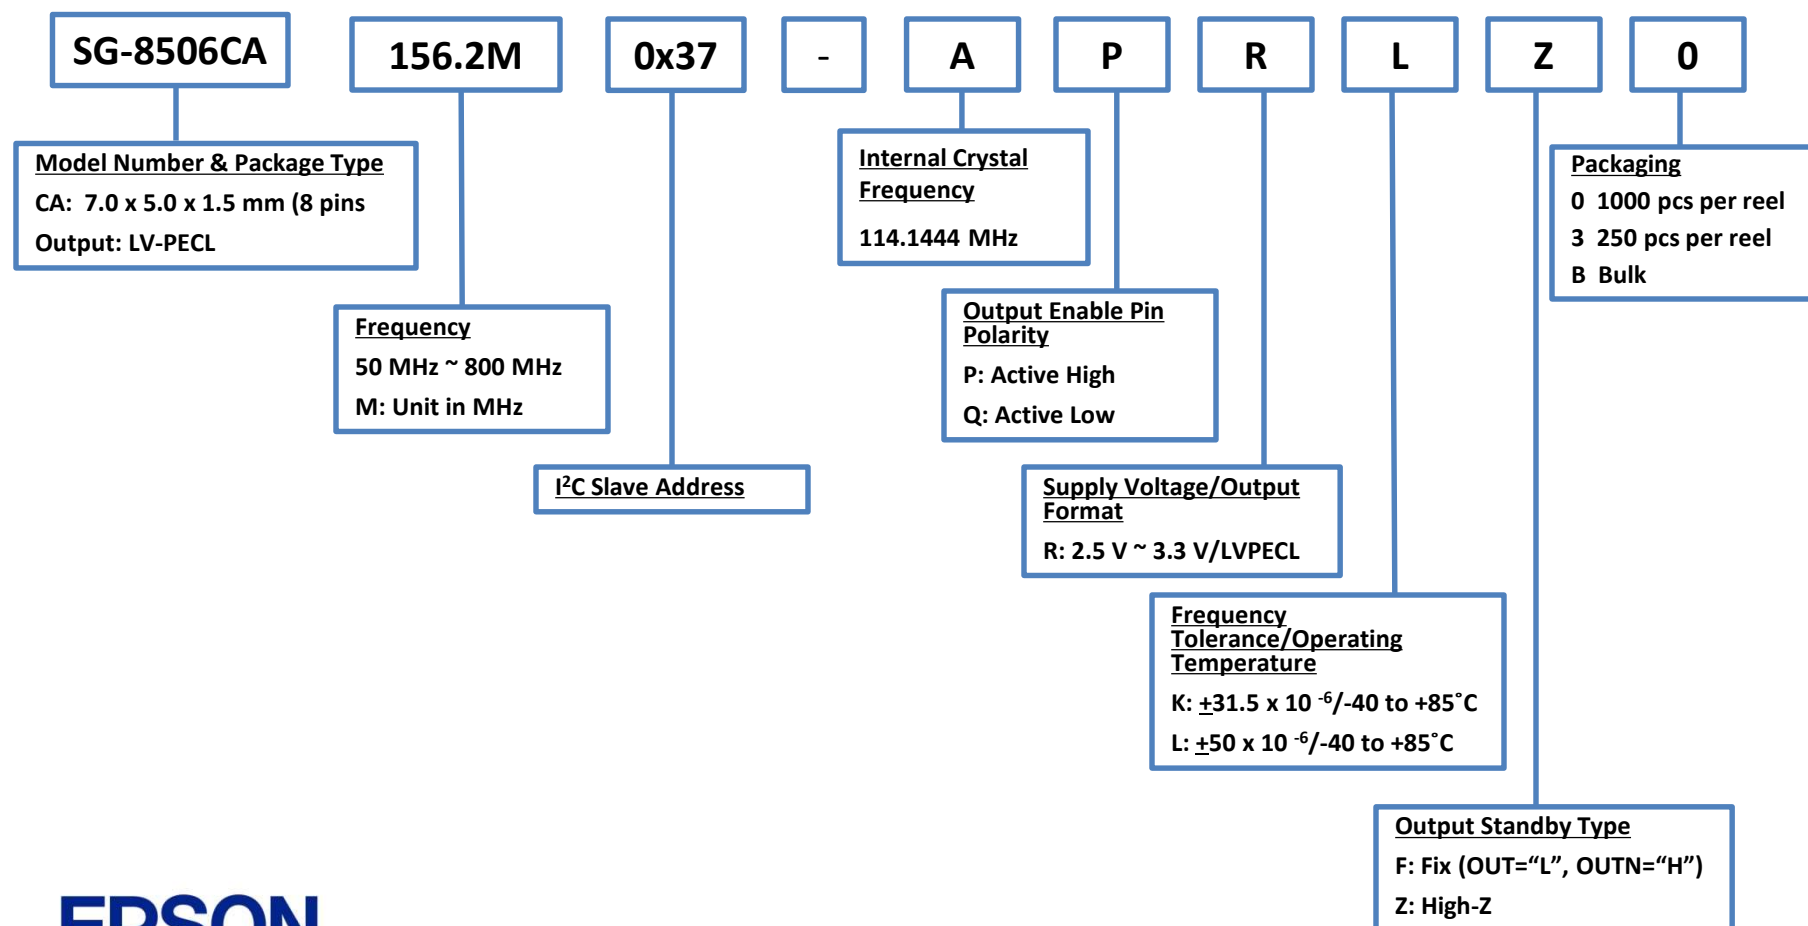


Product Configuration System



Crystal Oscillators - Spread Spectrum

Discontinued

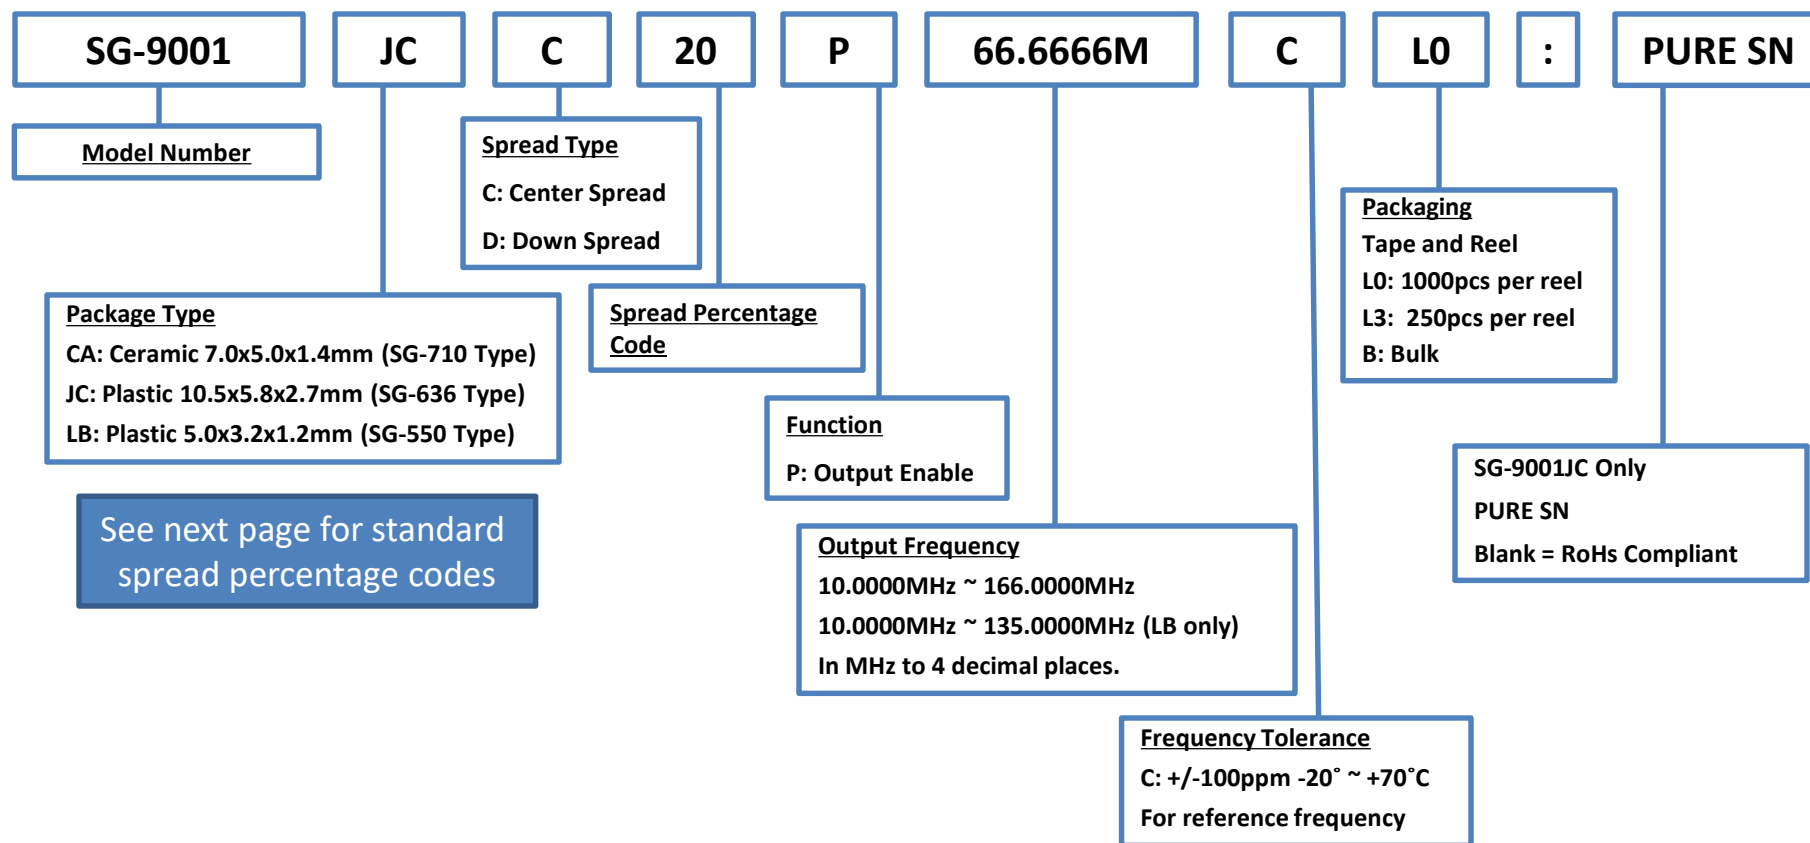

EPSON

June, 2021

NOTES:

SG-9001CA & SG-9001LB: Complete PB FREE
SG-9001JC: RoHS COMPLIANT

129

Spread Rate Options


SG-9001

Center Spread		Down Spread	
Product Configuration Code	Spread Rate %	Product Configuration Code	Spread Rate %
C02	+/- 0.25	D05	- 0.5
C05	+/- 0.5	D10	- 1.0
C07	+/- 0.75	D15	- 1.5
C10	+/- 1.0	D20	- 2.0
C15	+/- 1.5	D30	- 3.0
C20	+/- 2.0	D40	- 4.0

Product Configuration System



Crystal Oscillator (SPXO) – Programmable, Spread Spectrum

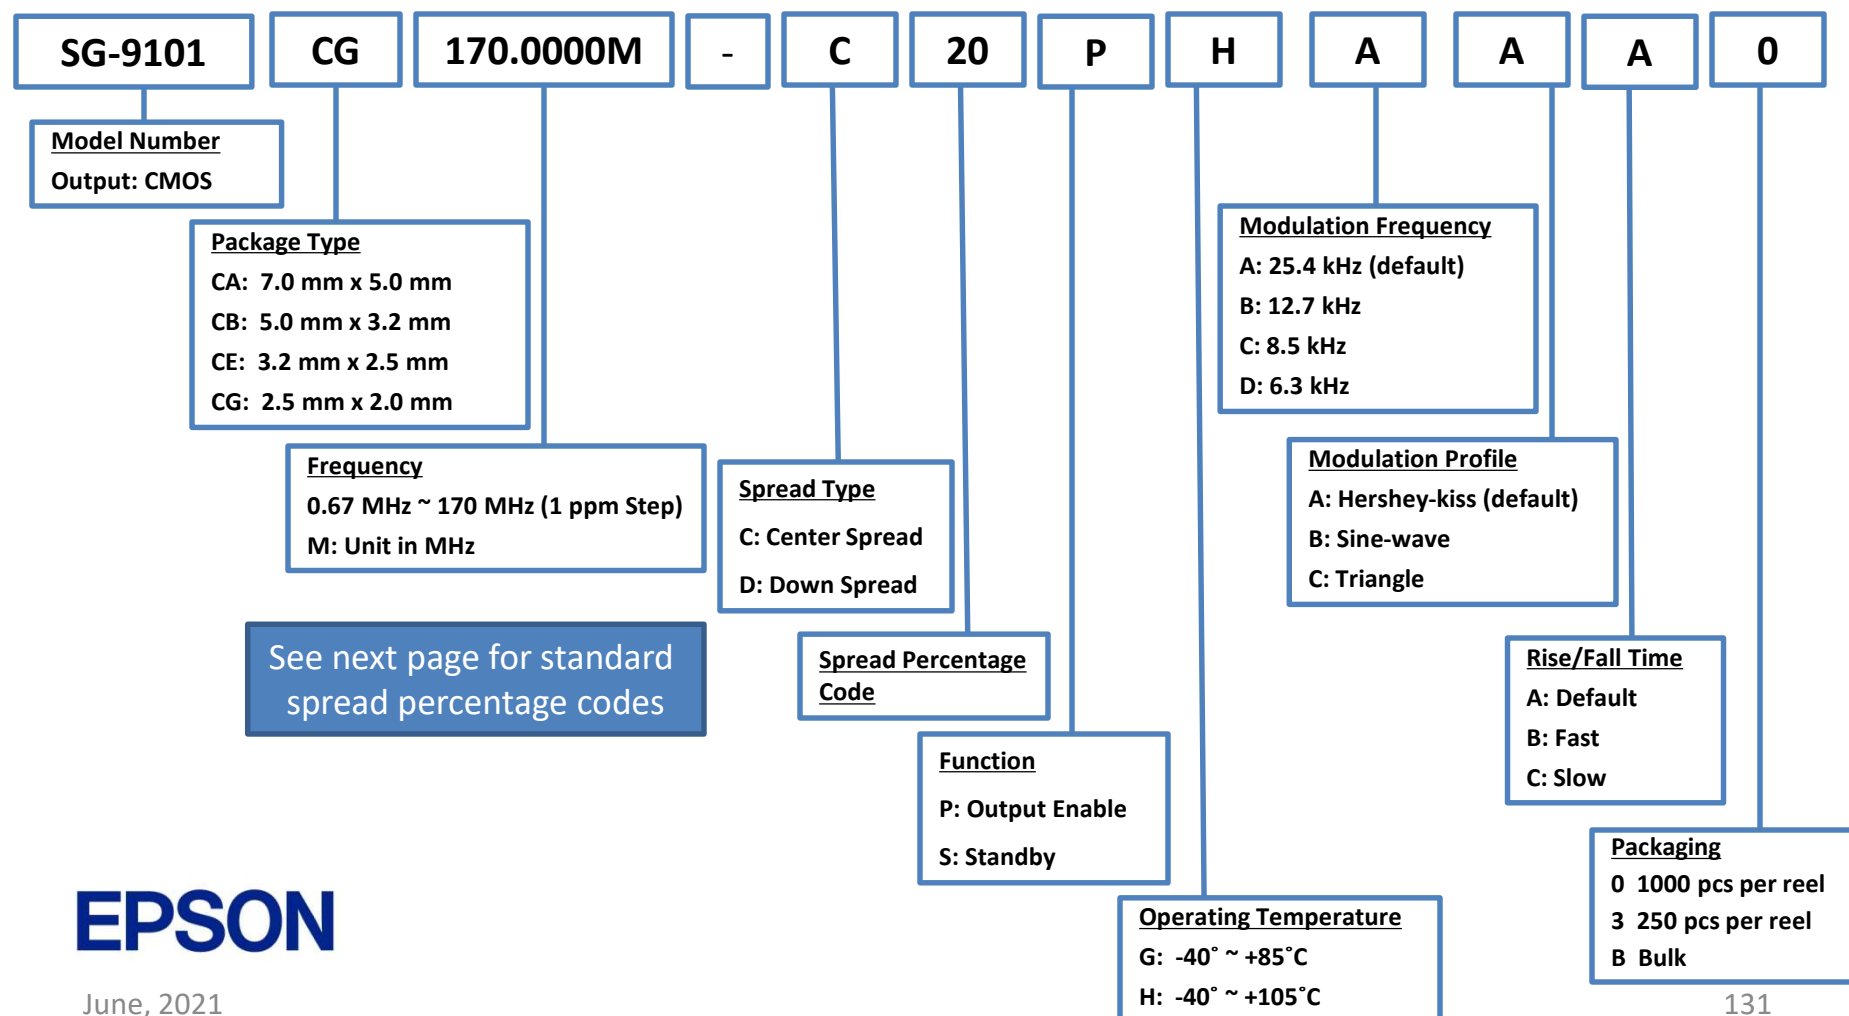

EPSON

June, 2021

Spread Rate Options


SG-9101

Center Spread		Down Spread	
Product Configuration Code	Spread Rate %	Product Configuration Code	Spread Rate %
C02	+/- 0.25	D05	- 0.5
C05	+/- 0.5	D10	- 1.0
C07	+/- 0.75	D15	- 1.5
C10	+/- 1.0	D20	- 2.0
C15	+/- 1.5	D30	- 3.0
C20	+/- 2.0	D40	- 4.0

Product Configuration System



Crystal Oscillator (SPXO) – Programmable, Spread Spectrum, Automotive (AECQ100)

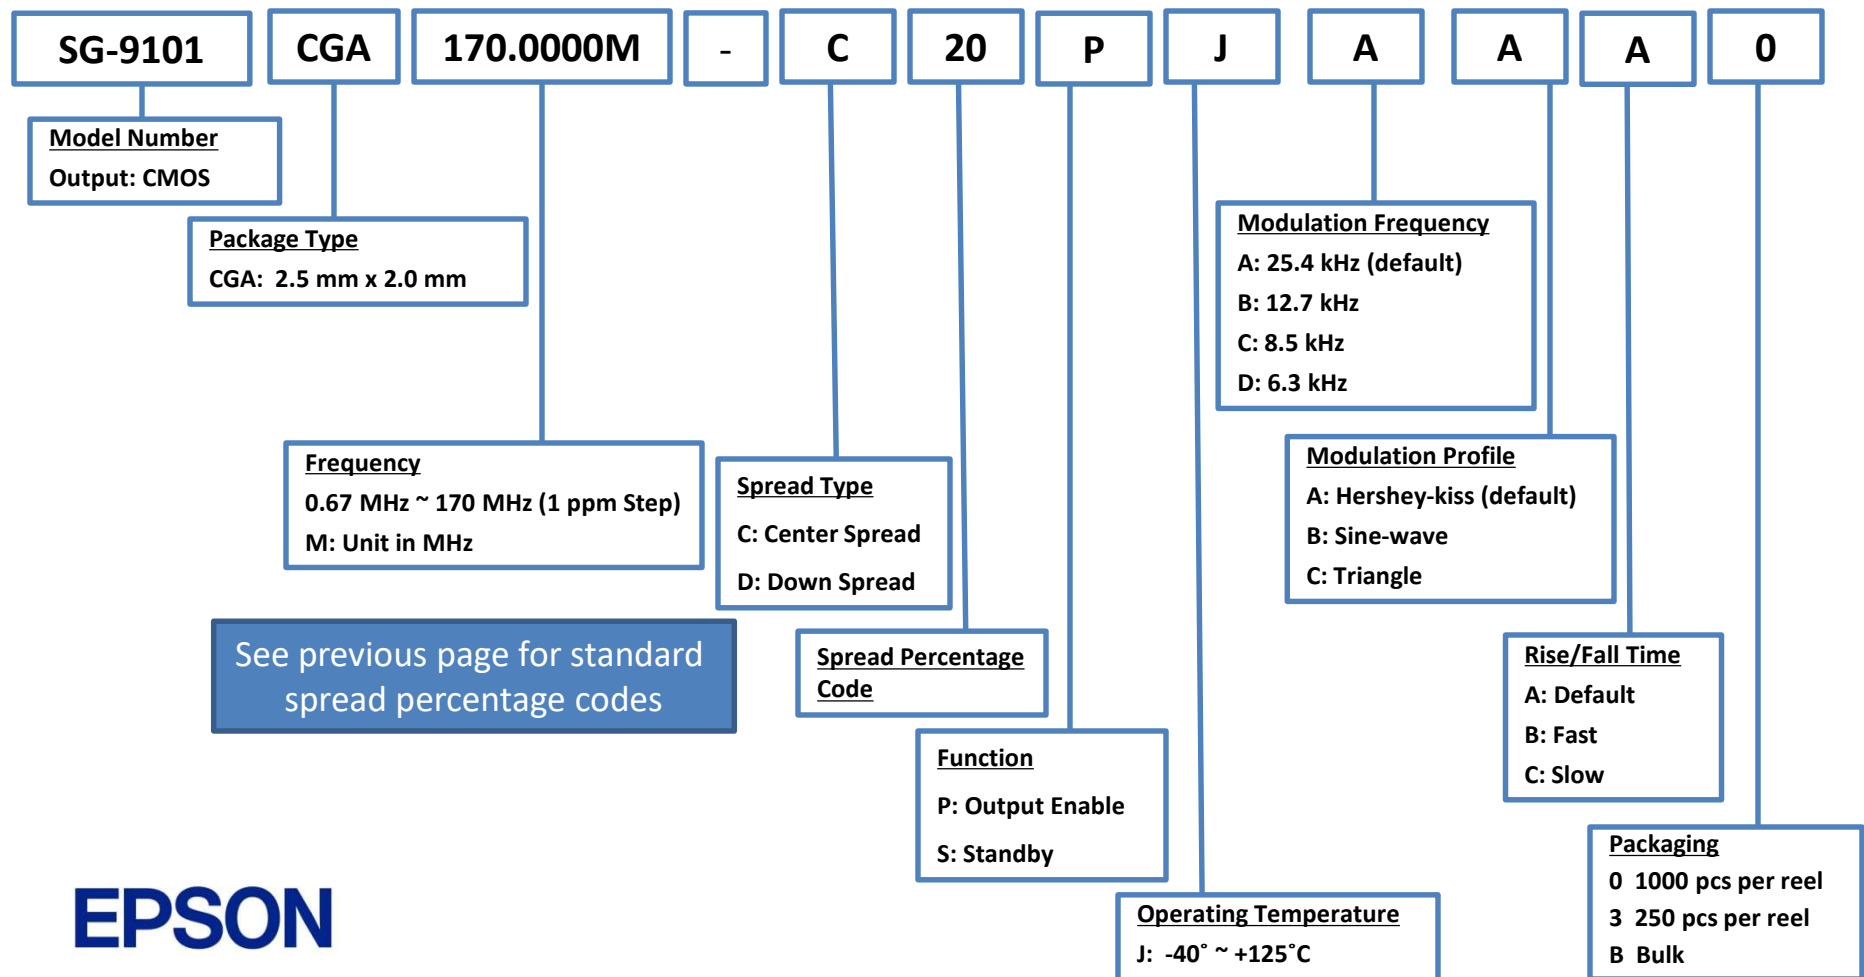

EPSON

June, 2021

Product Configuration Guide


VOLTAGE CONTROLLED OSCILLATORS



Product Configuration System




Oscillators - VCXO

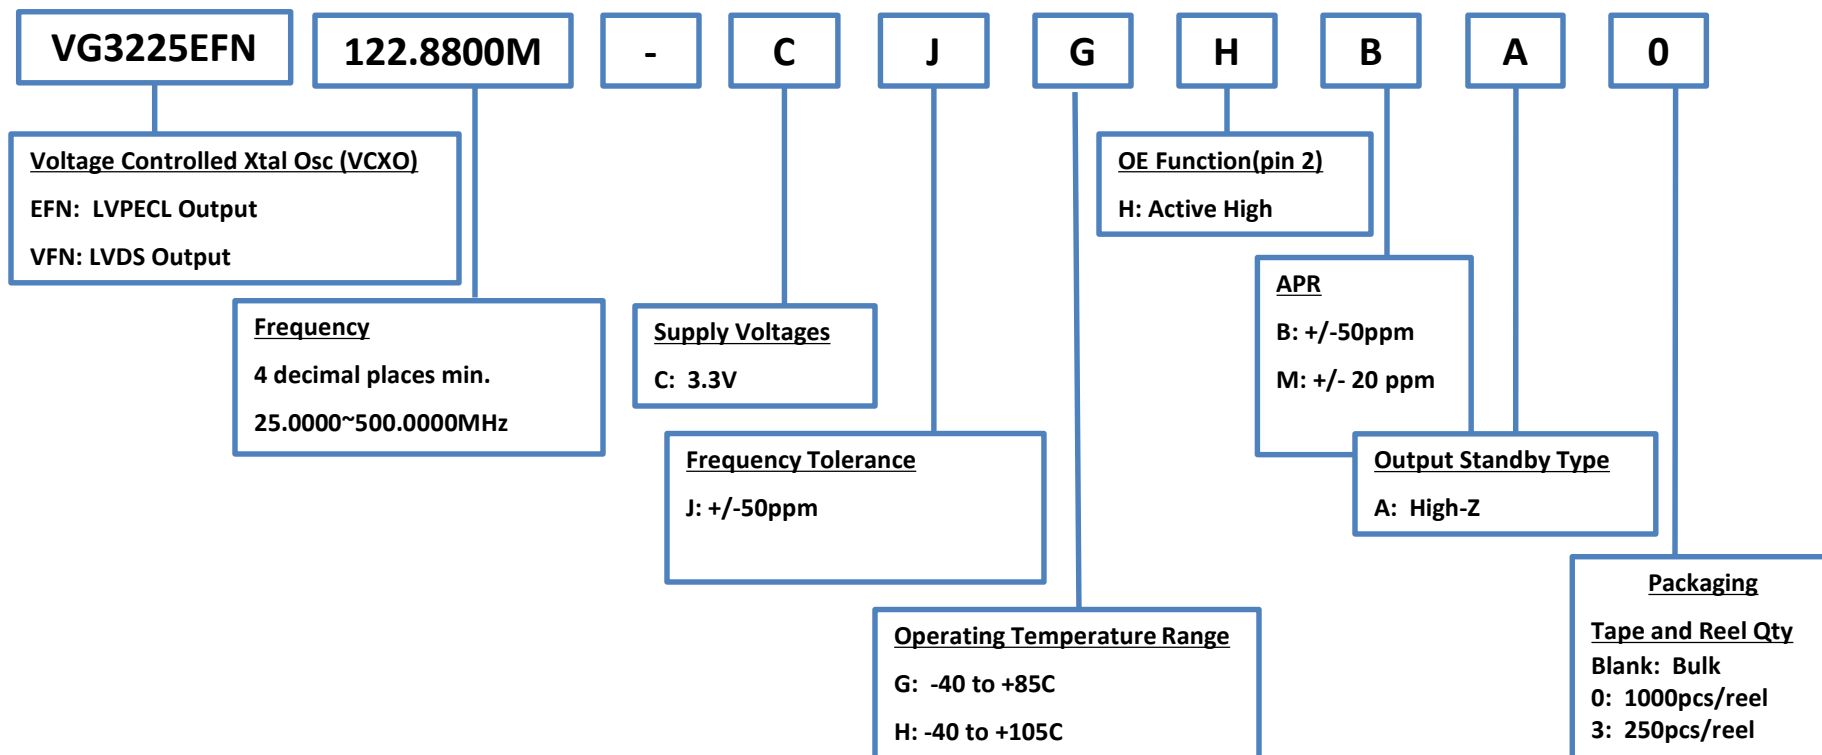

Product Configuration System




Oscillators - VCXO

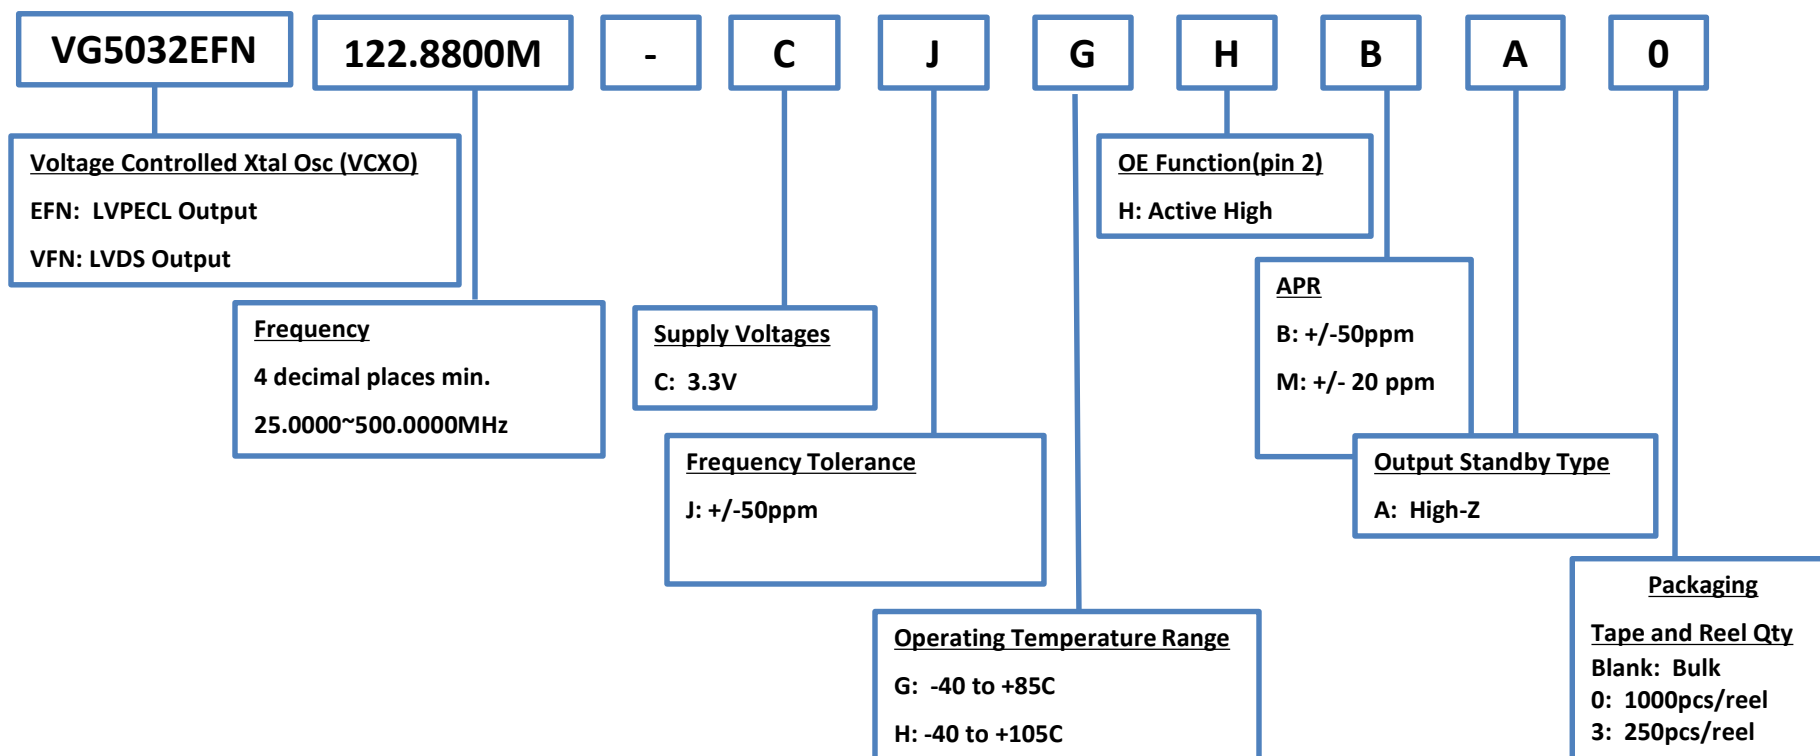

Product Configuration System



Oscillators - VCXO

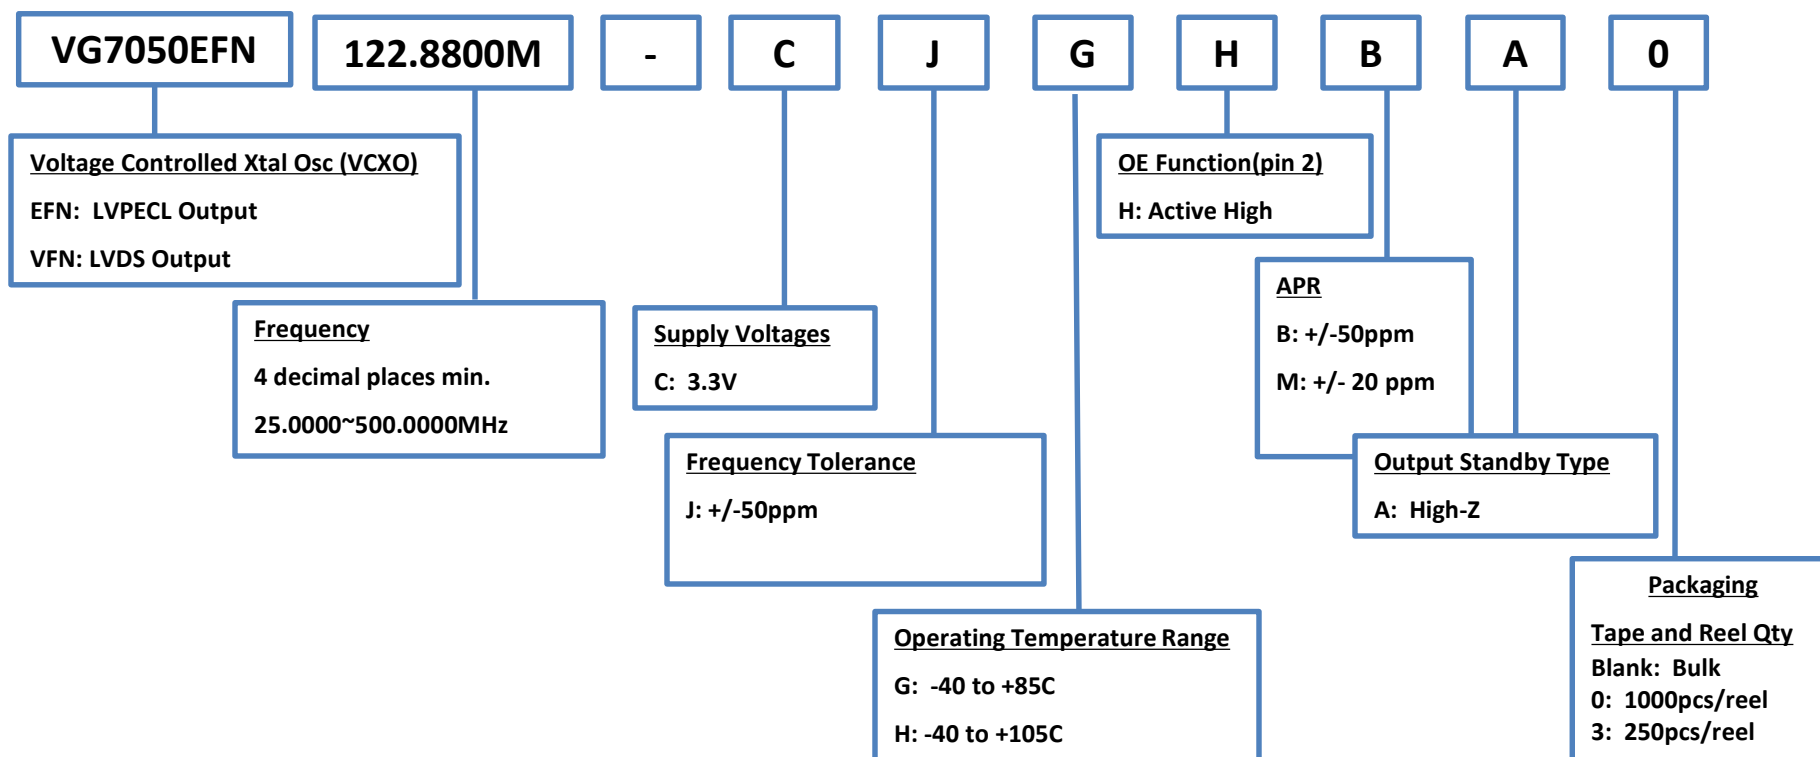


Product Configuration System



Oscillators - VCXO

Discontinued

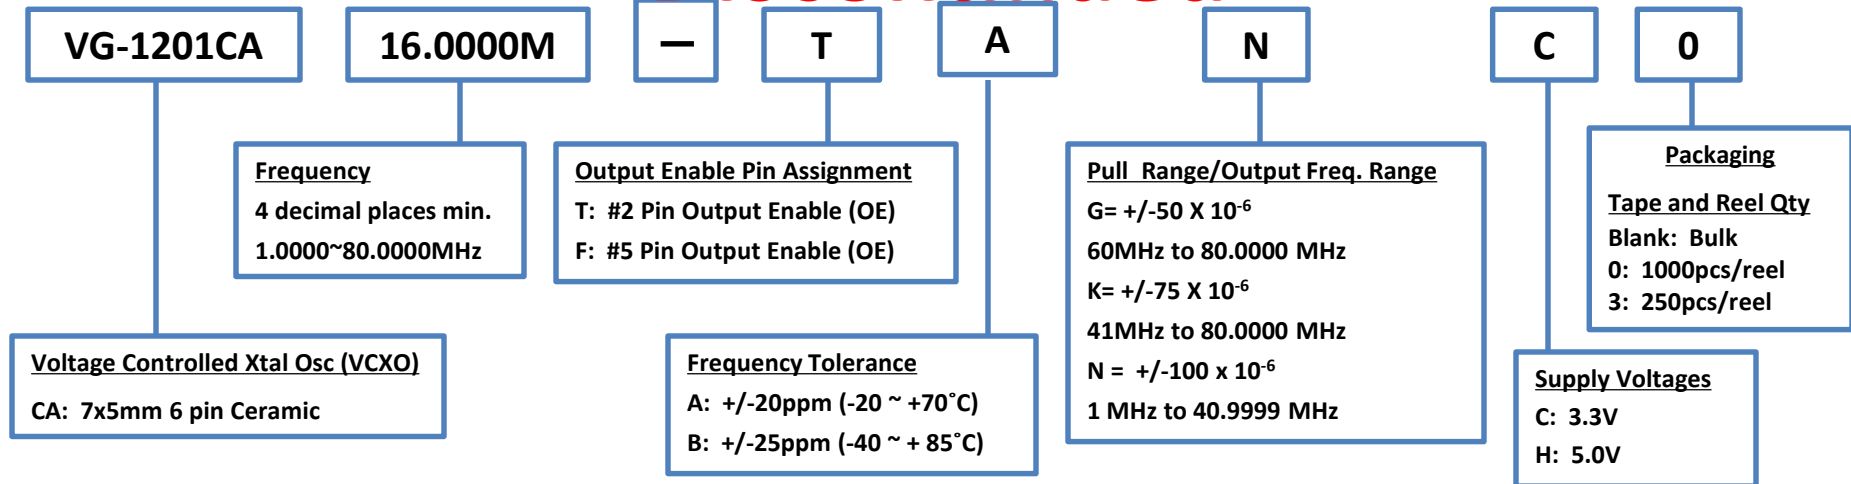

CODE	STABILITY	OPERATING TEMP.	PULL RANGE	OUTPUT FREQ.
ANC / ANH	+/-20PPM	-20C to +70°C	+/-100PPM	1MHz to 40.9999MHz
AKC / AKH	+/-20PPM	-20C to +70°C	+/-75PPM	41MHz to 80.0000MHz
BNC / BNH	+/-25PPM	-40C to +85°C	+/-100PPM	1MHz to 40.9999MHz
BKC / BKH	+/-25PPM	-40C to +85°C	+/-75PPM	41MHz to 80.0000MHz

EPSON

June, 2021


138

Product Configuration System



Oscillators - VCXO

Not Recommended

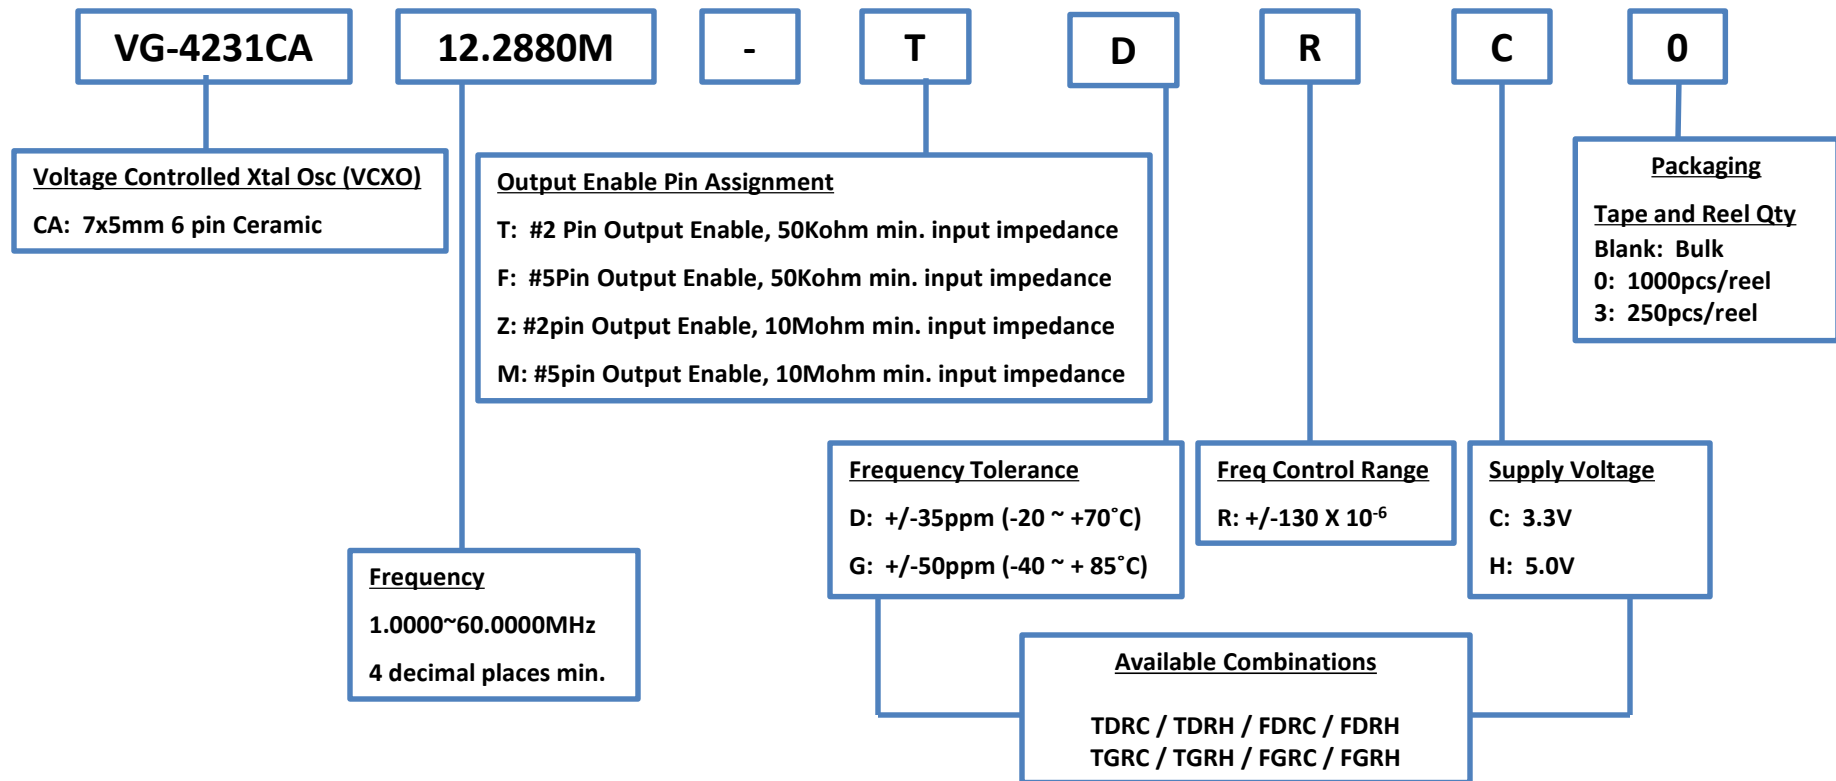

EPSON

June, 2021


NOTE:

Output Enable Pin Assignment Z and M are not available with Supply Voltage H (5.0V)

Product Configuration System




Oscillators - VCXO

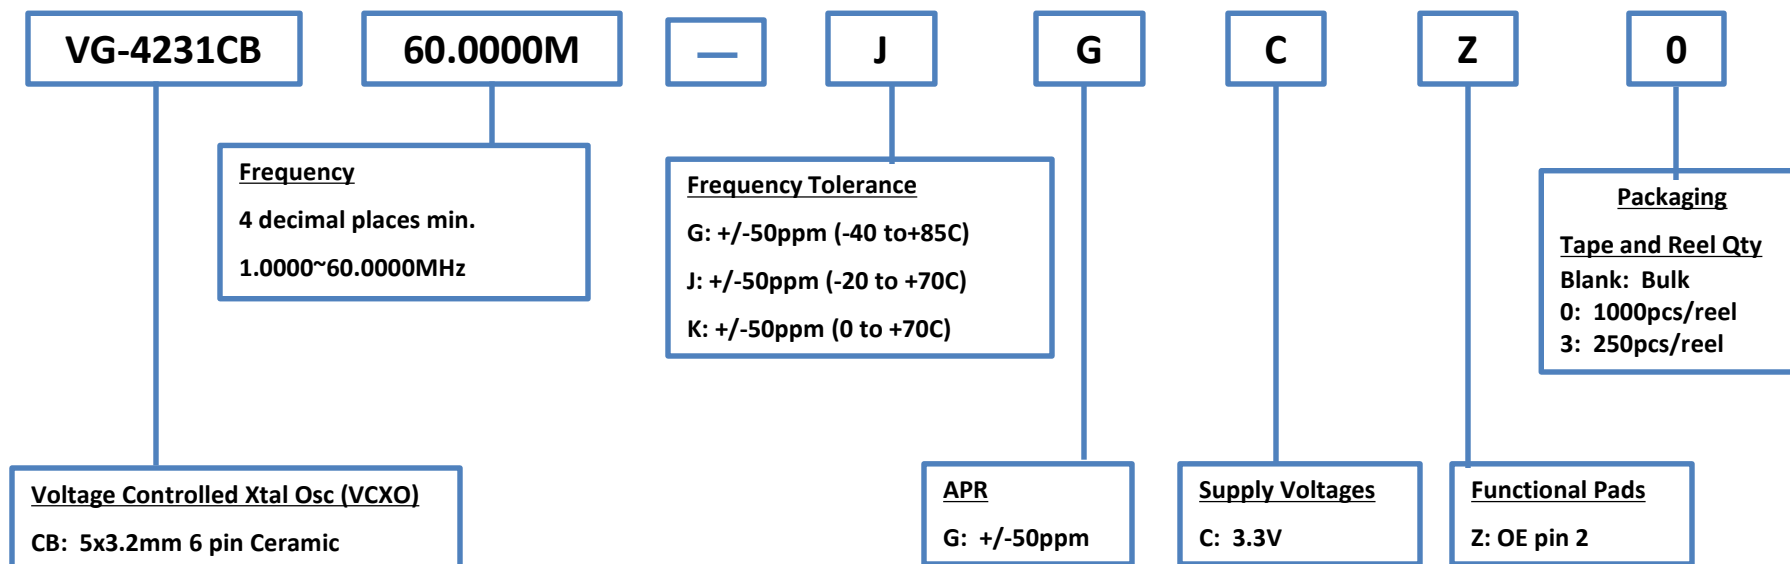

Product Configuration System



Oscillators - VCXO

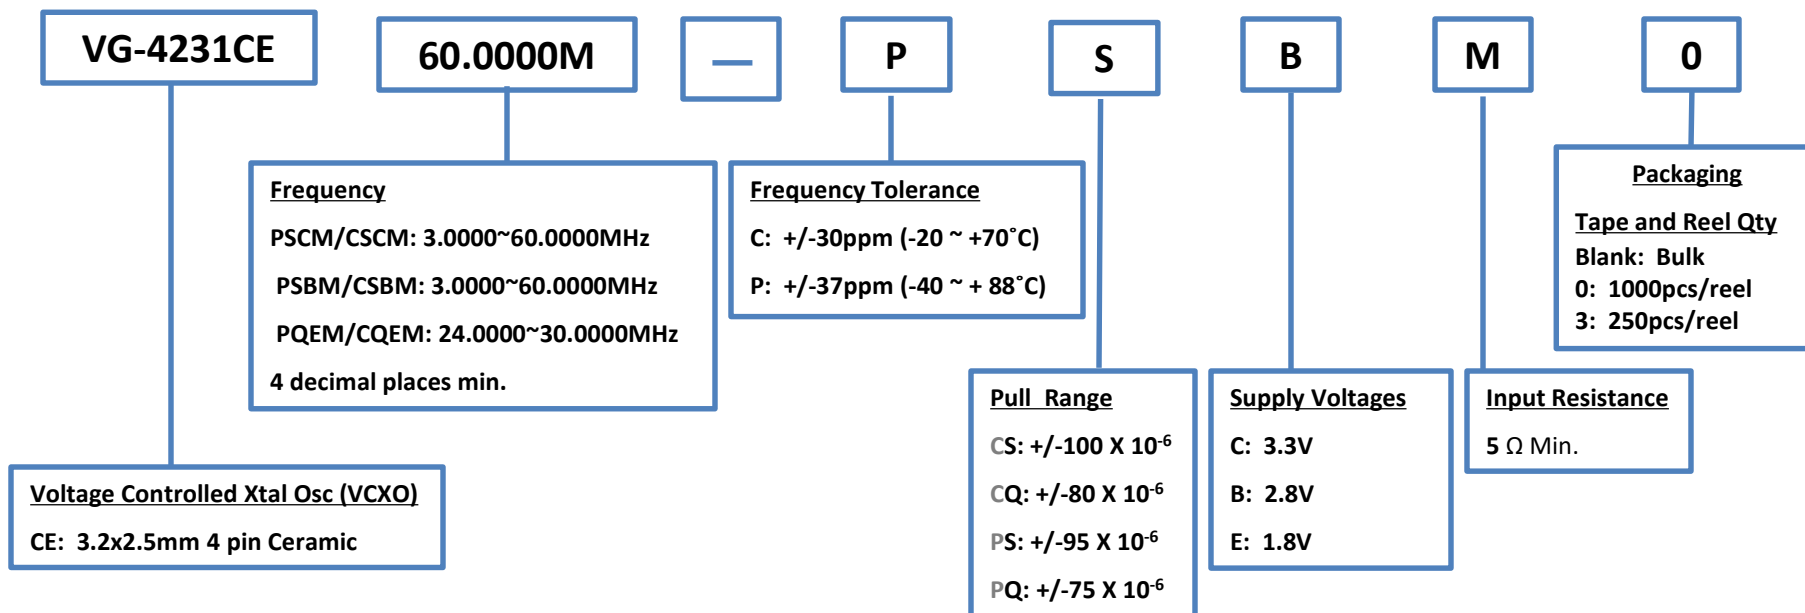

CODE		Frequency Tolerance	Temperature Range	Absolute Pull Range
CSCM / CSBM/CQEM	C	+/-30 x 10 ⁻⁶	-20 °C to + 70°C	S : +/-100 x 10 ⁻⁶ / Q : +/-80 x 10 ⁻⁶
PSCM/PSBM/PQEM	P	+/-37 X 10 ⁻⁶	-40°C to + 85°C	S : +/-95 x 10 ⁻⁶ / Q : +/-75 x 10 ⁻⁶

EPSON

June, 2021


141

Product Configuration System



Oscillators - VCXO

Discontinued

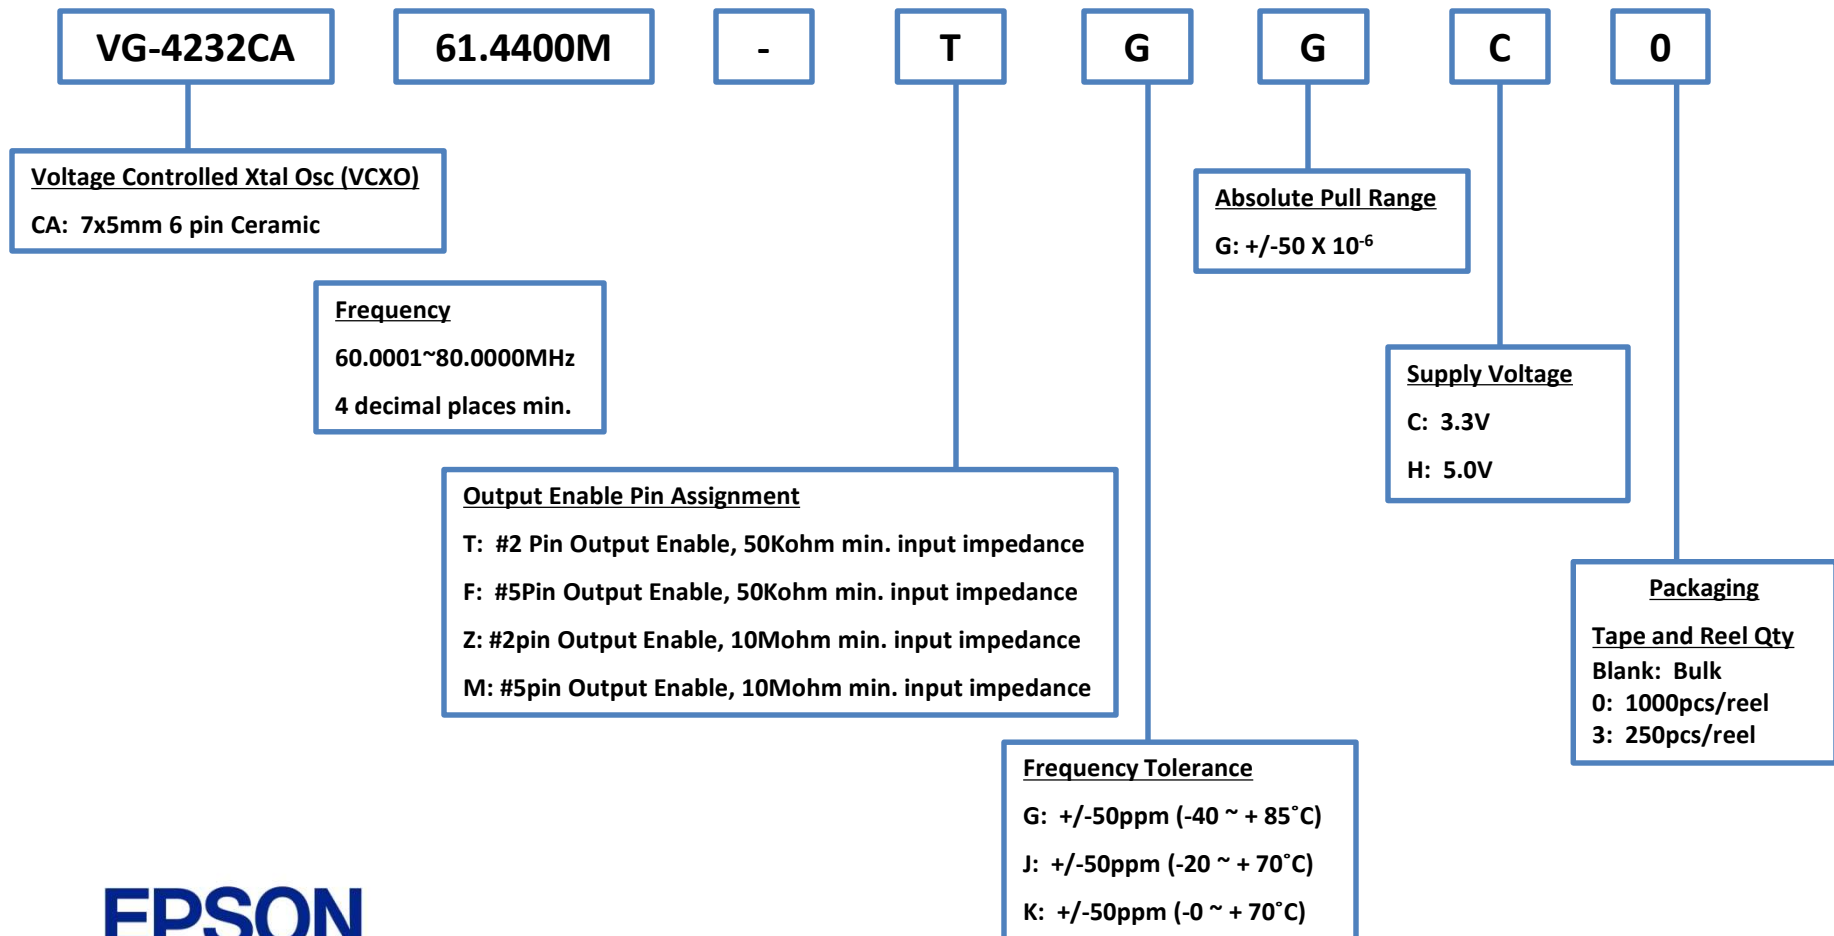

EPSON


June, 2021

Product Configuration System



Oscillators - VCXO

Not Recommended

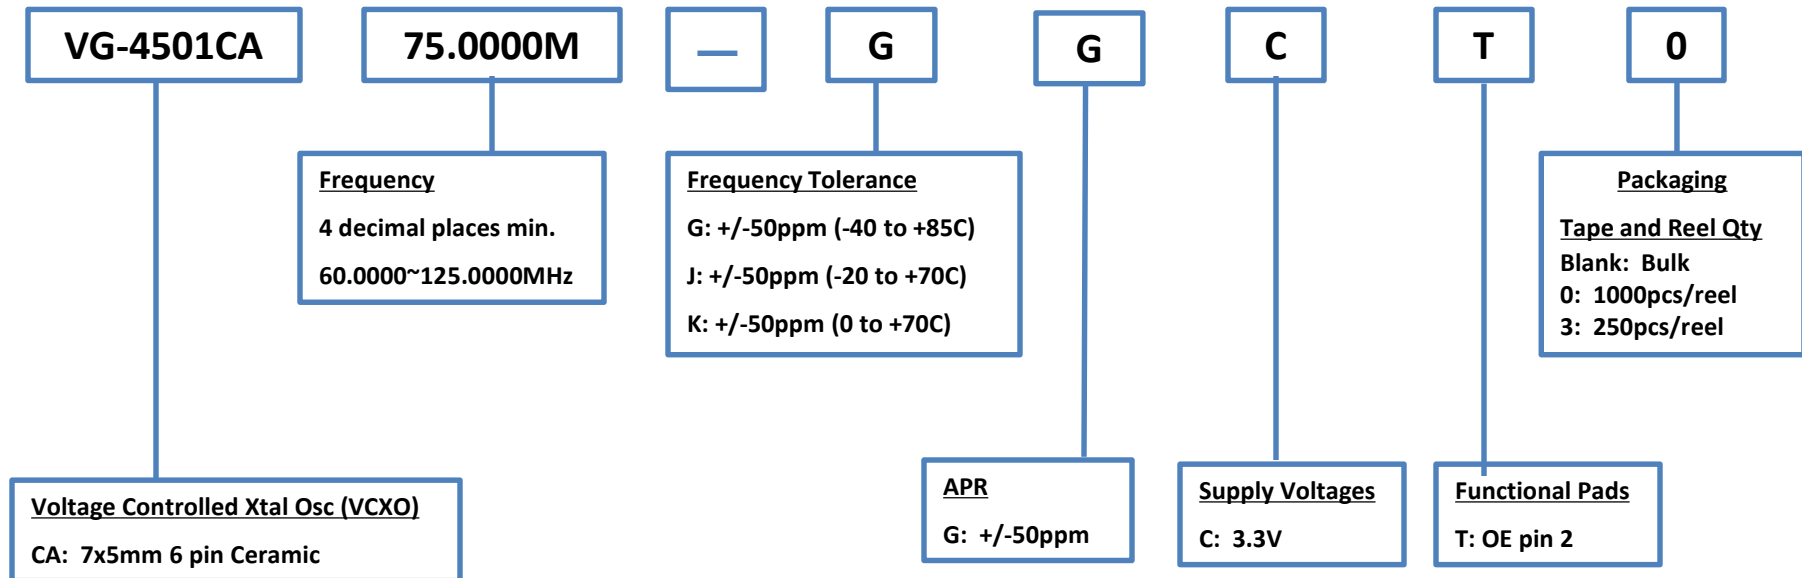


Product Configuration System



Oscillators - VCXO

Not Recommended

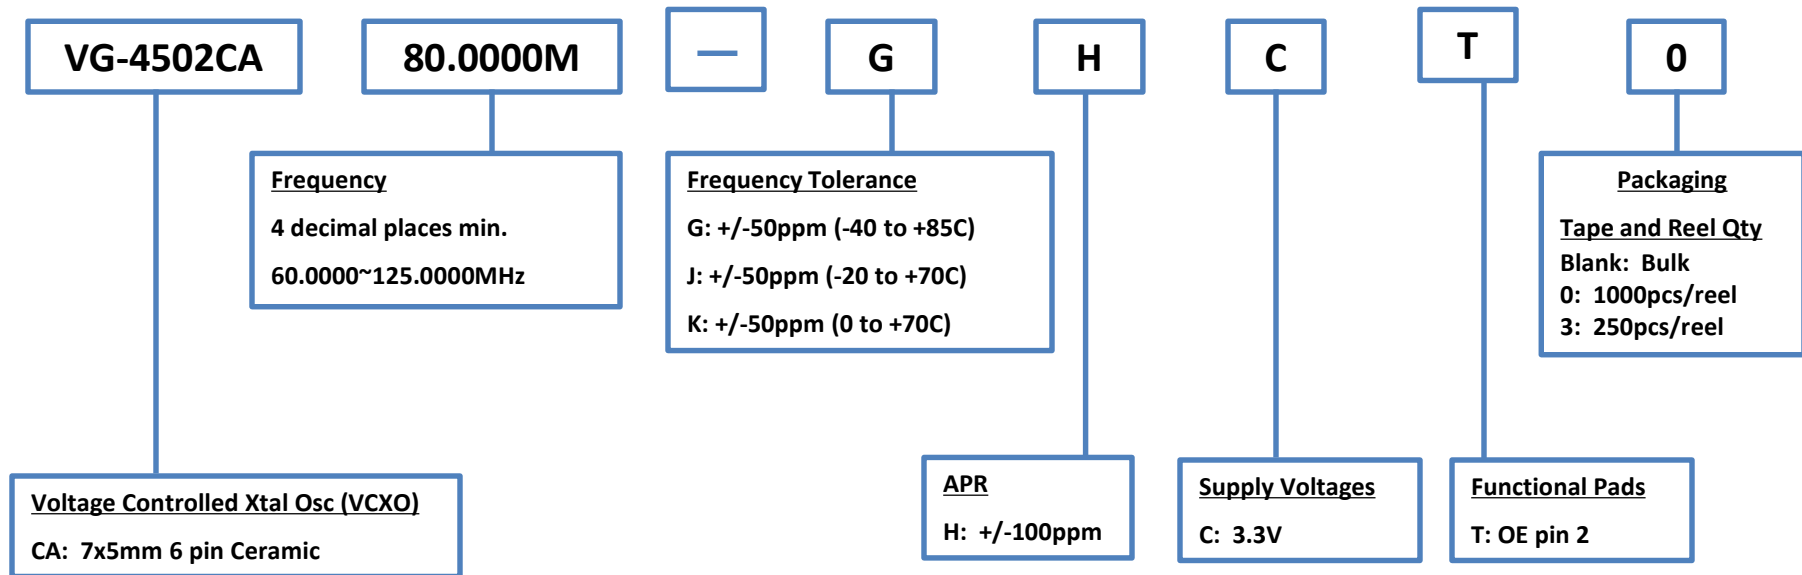


Product Configuration System



Oscillators - VCXO

Discontinued

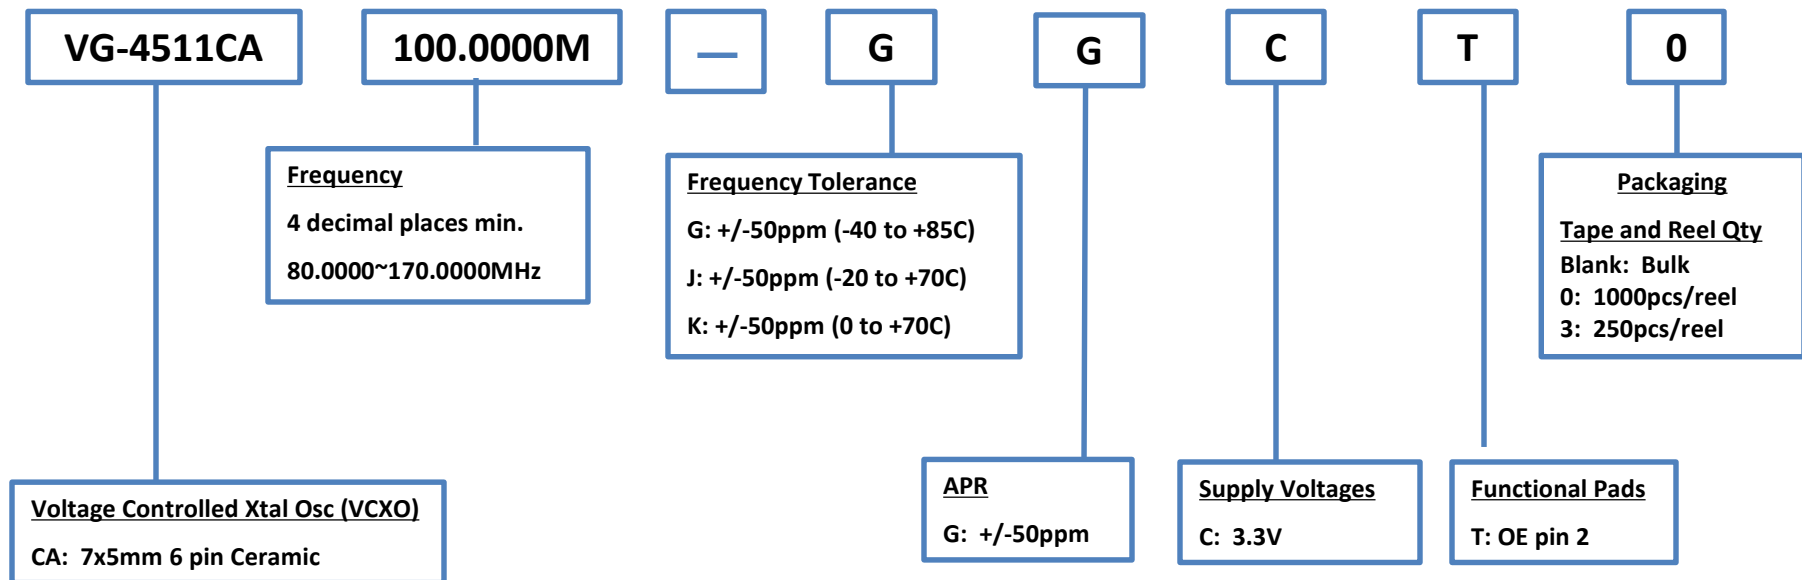


Product Configuration System



Oscillators - VCXO

Discontinued

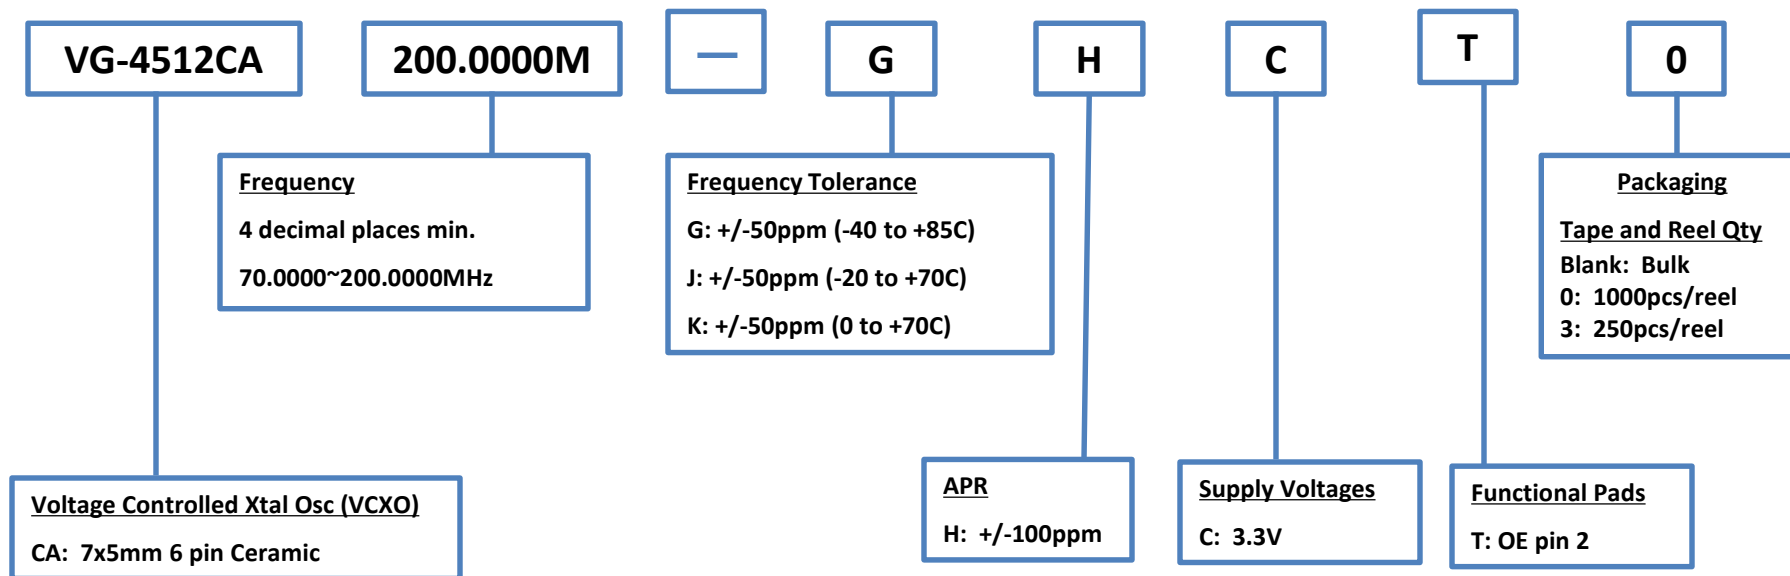


Product Configuration System



Oscillators - VCXO

Discontinued

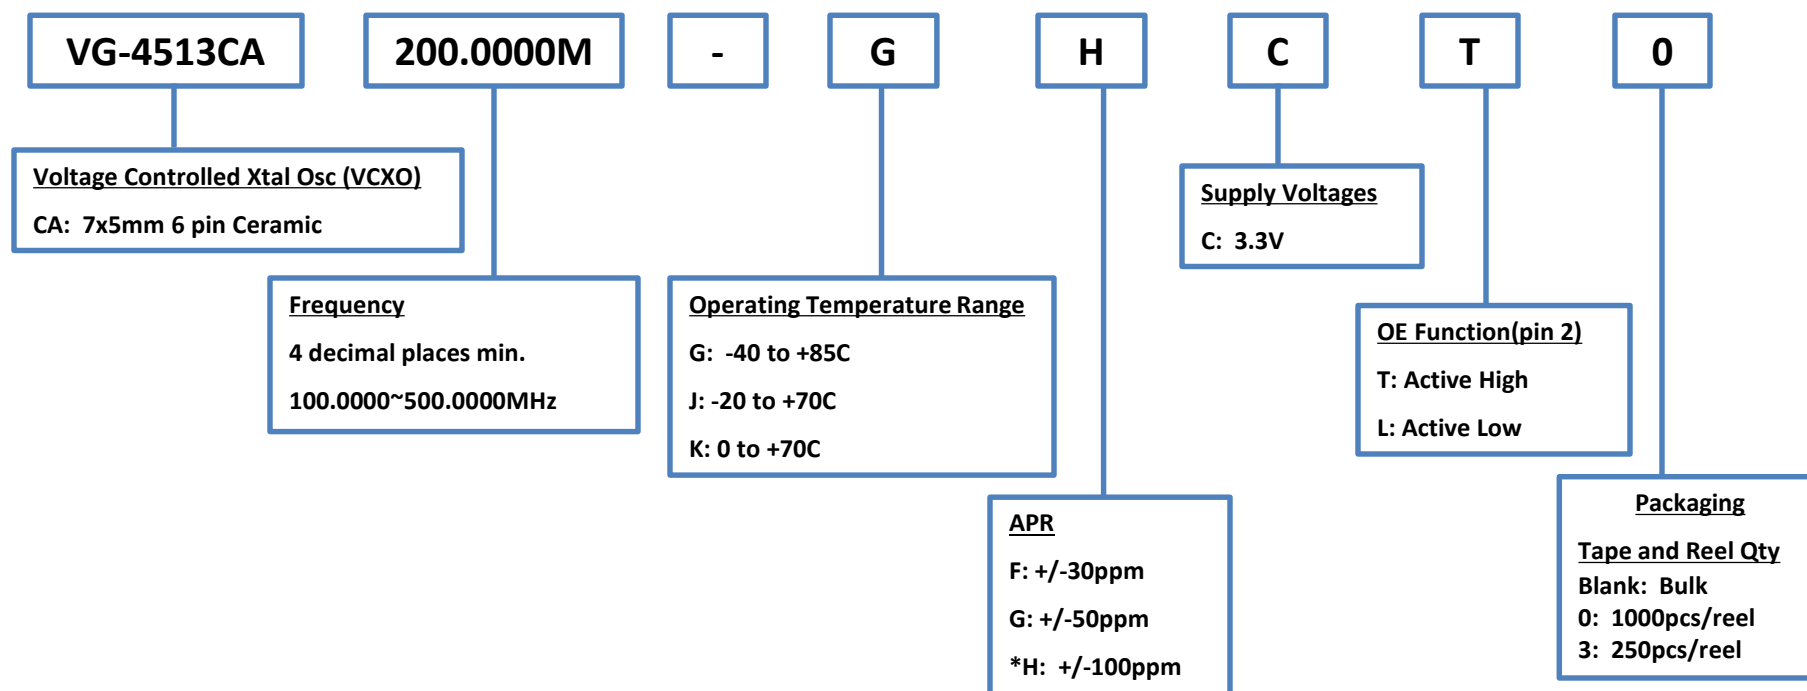

*Only 120MHz ≤ f_0 ≤ 200MHz are available

NOTE:

Standard Frequencies Offered: 100M, 122.88M, 125M, 148.351M, 148.5M, 153.6M, 155.52M, 156.25M, 200M

Please contact us for requirements not listed in this specification.

EPSON


June, 2021

Product Configuration System



Oscillators - VCXO

Discontinued

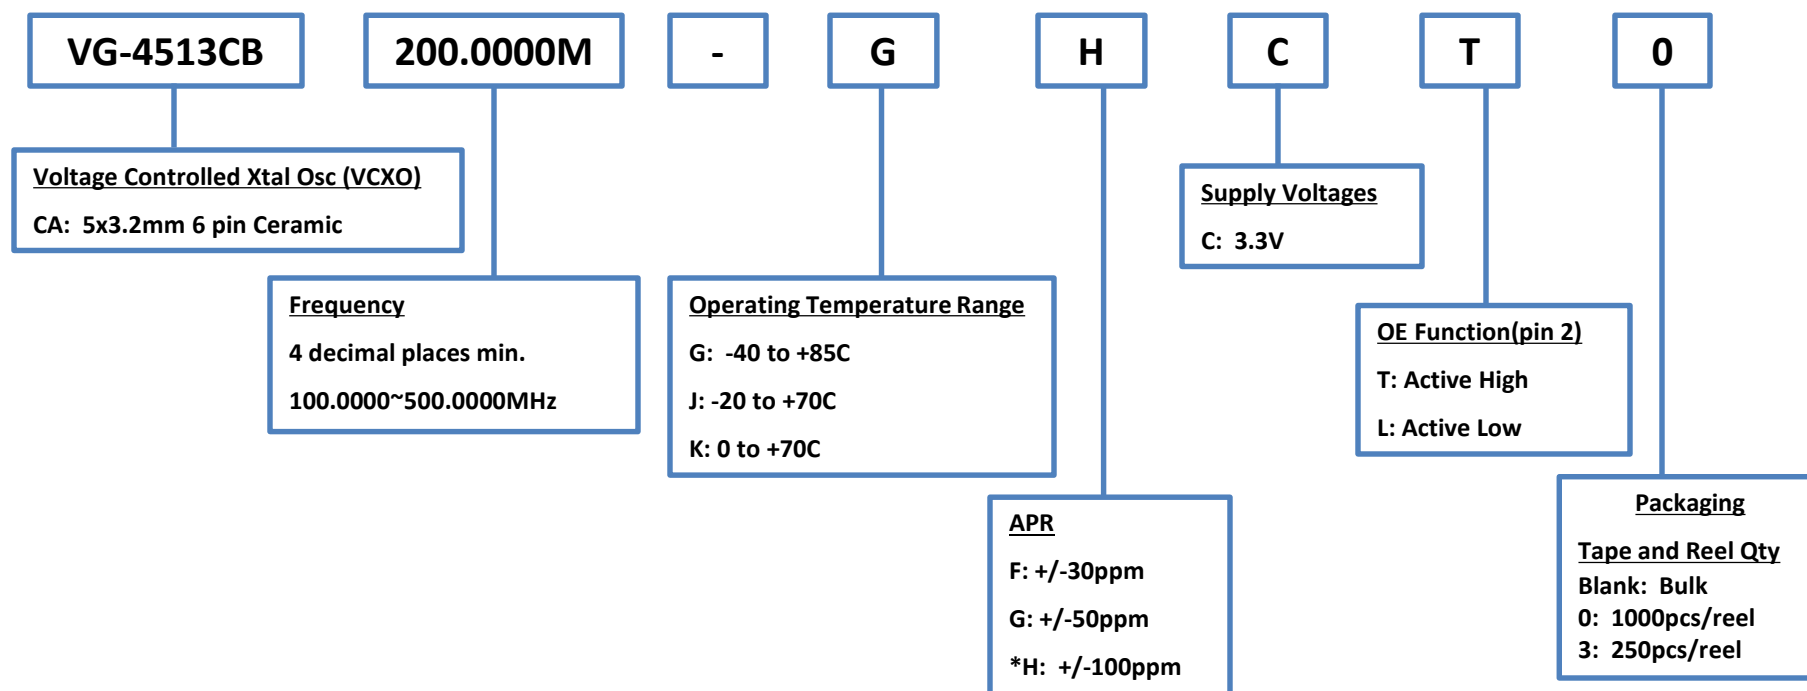

*Only 120MHz ≤ f_0 ≤ 200MHz are available

NOTE:

Standard Frequencies Offered: 122.88M, 153.6M

Please contact us for requirements not listed in this specification.


EPSON

June, 2021

Product Configuration System



Oscillators - VCSO

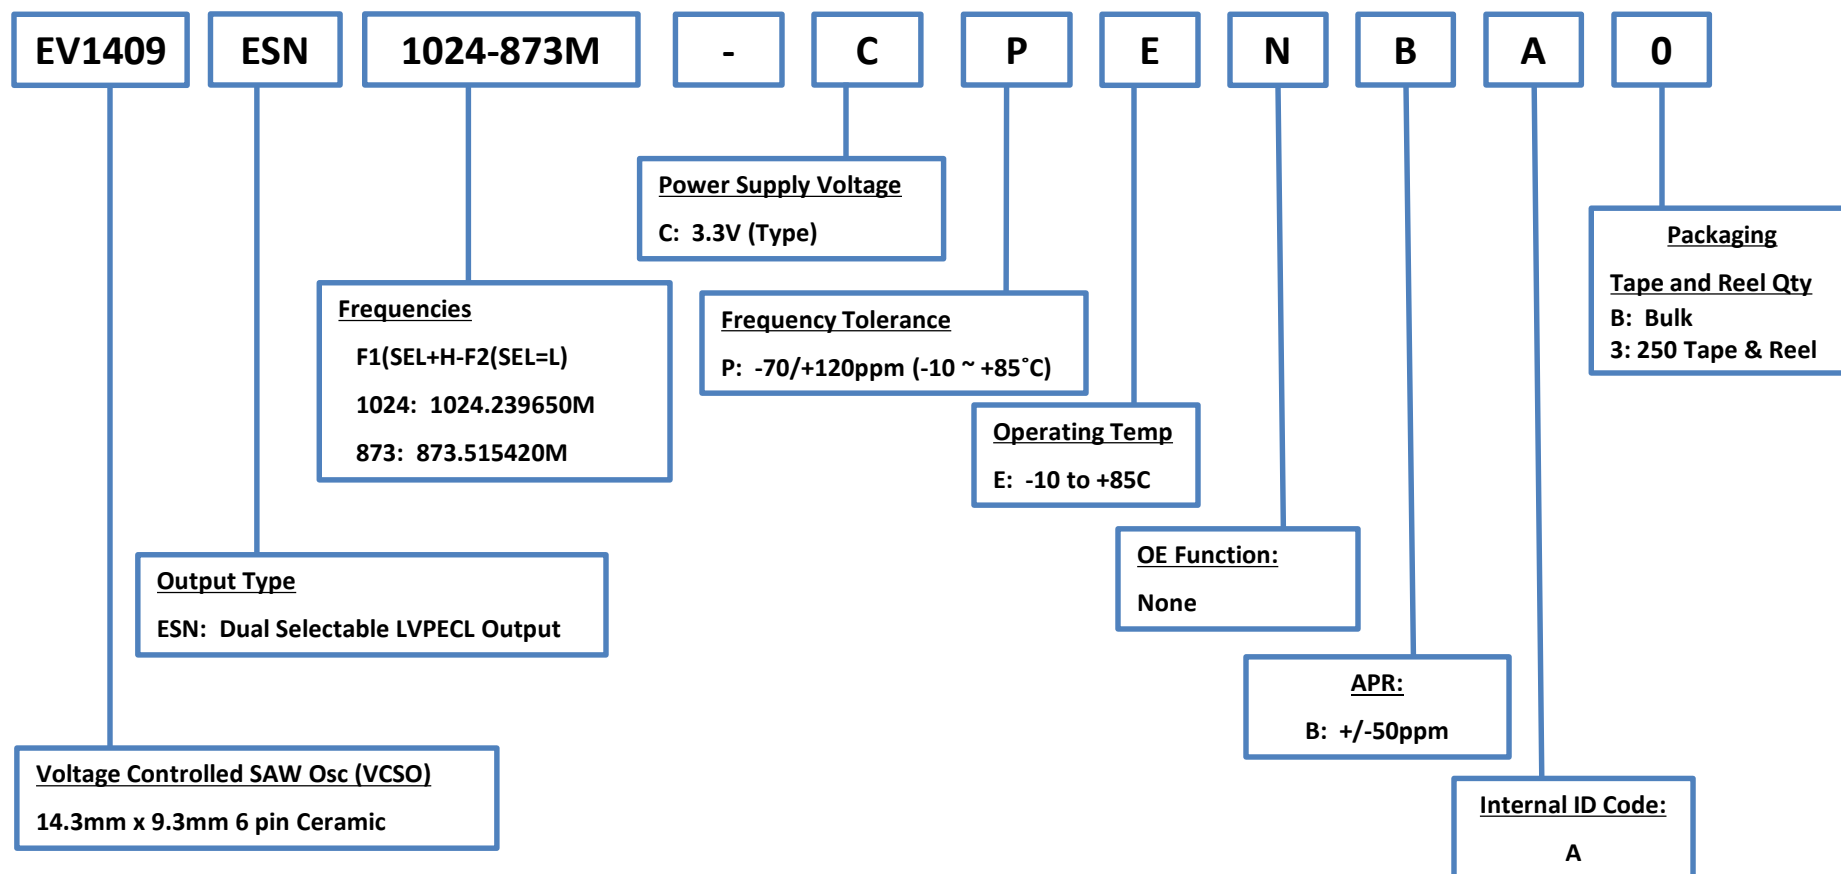


EPSON

June, 2021

Product Configuration System



Oscillators - VCSO

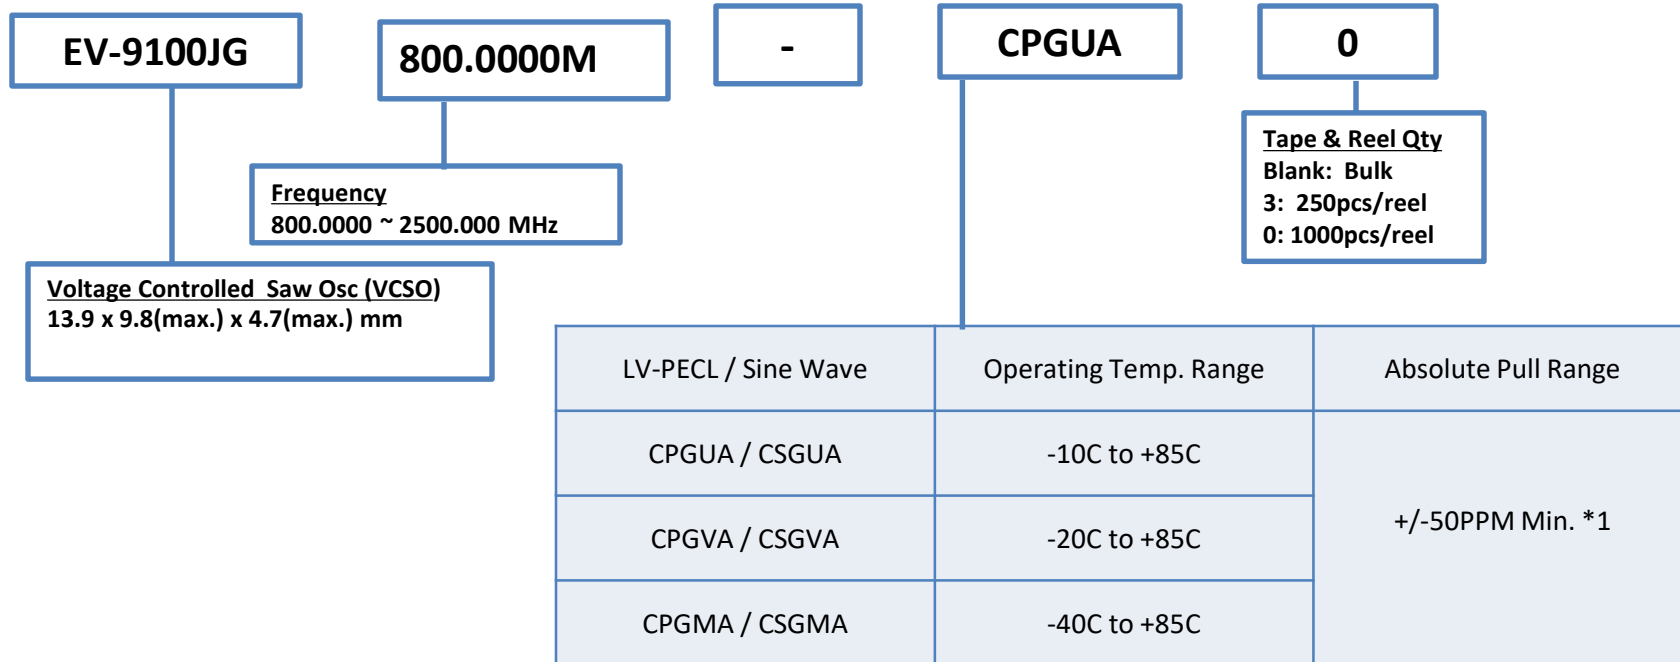

***1 NOTE:** Absolute Pull Range = Frequency Control Range – Frequency Tolerance


EPSON

June, 2021

Product Configuration System



Oscillators - VCXO

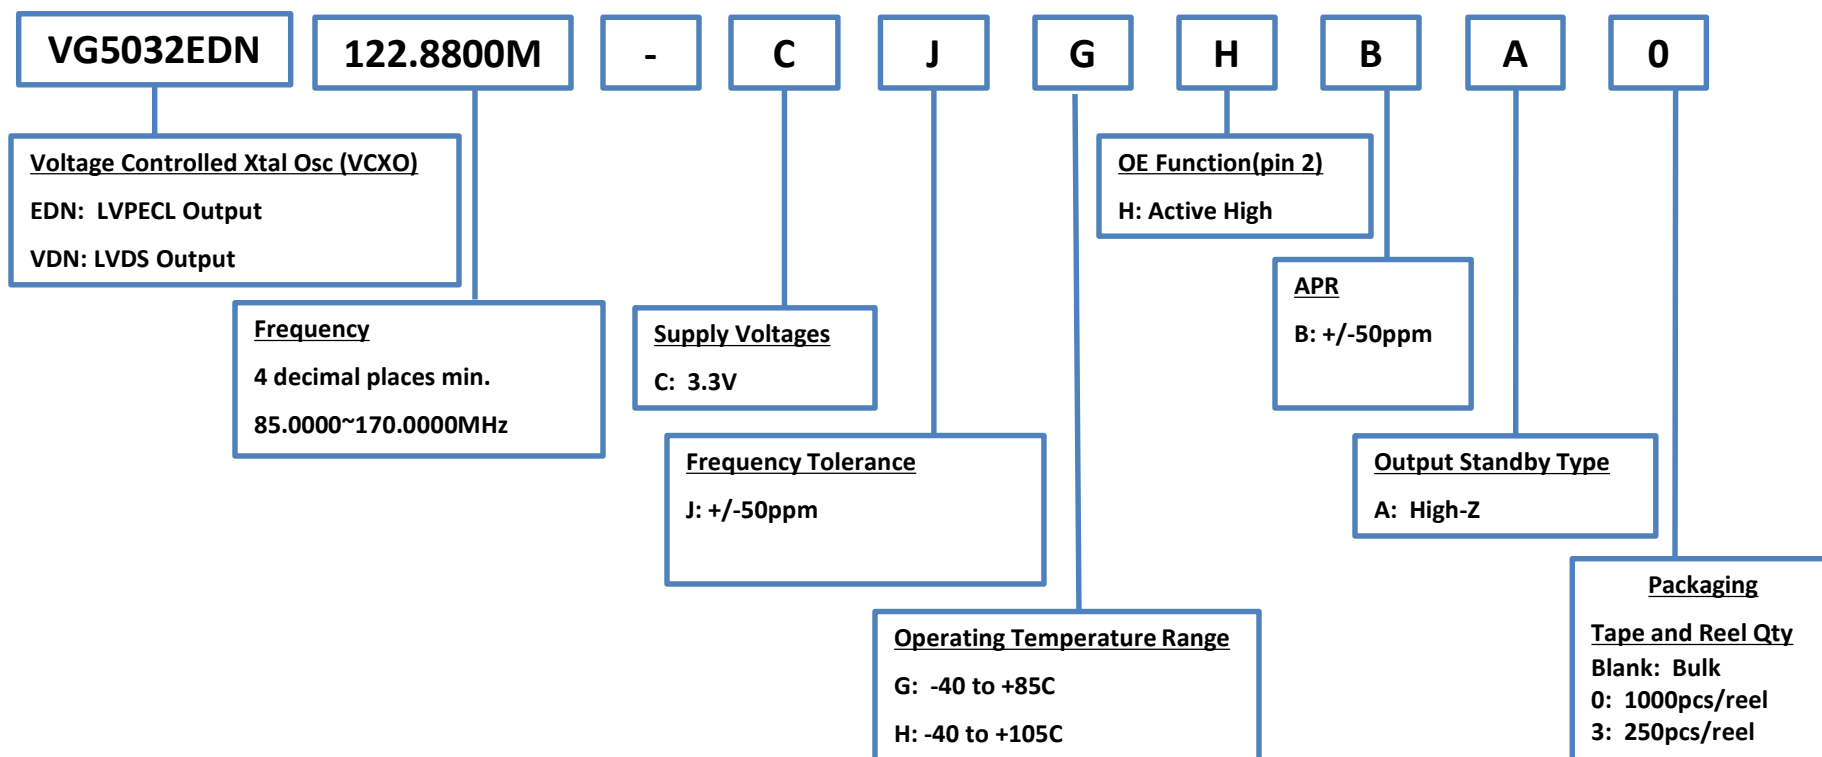

NOTE:

Standard Frequencies Offered: 122.88M

Please contact us for requirements not listed in this specification.

EPSON


June, 2021

Product Configuration System



Oscillators - VCXO

Discontinued

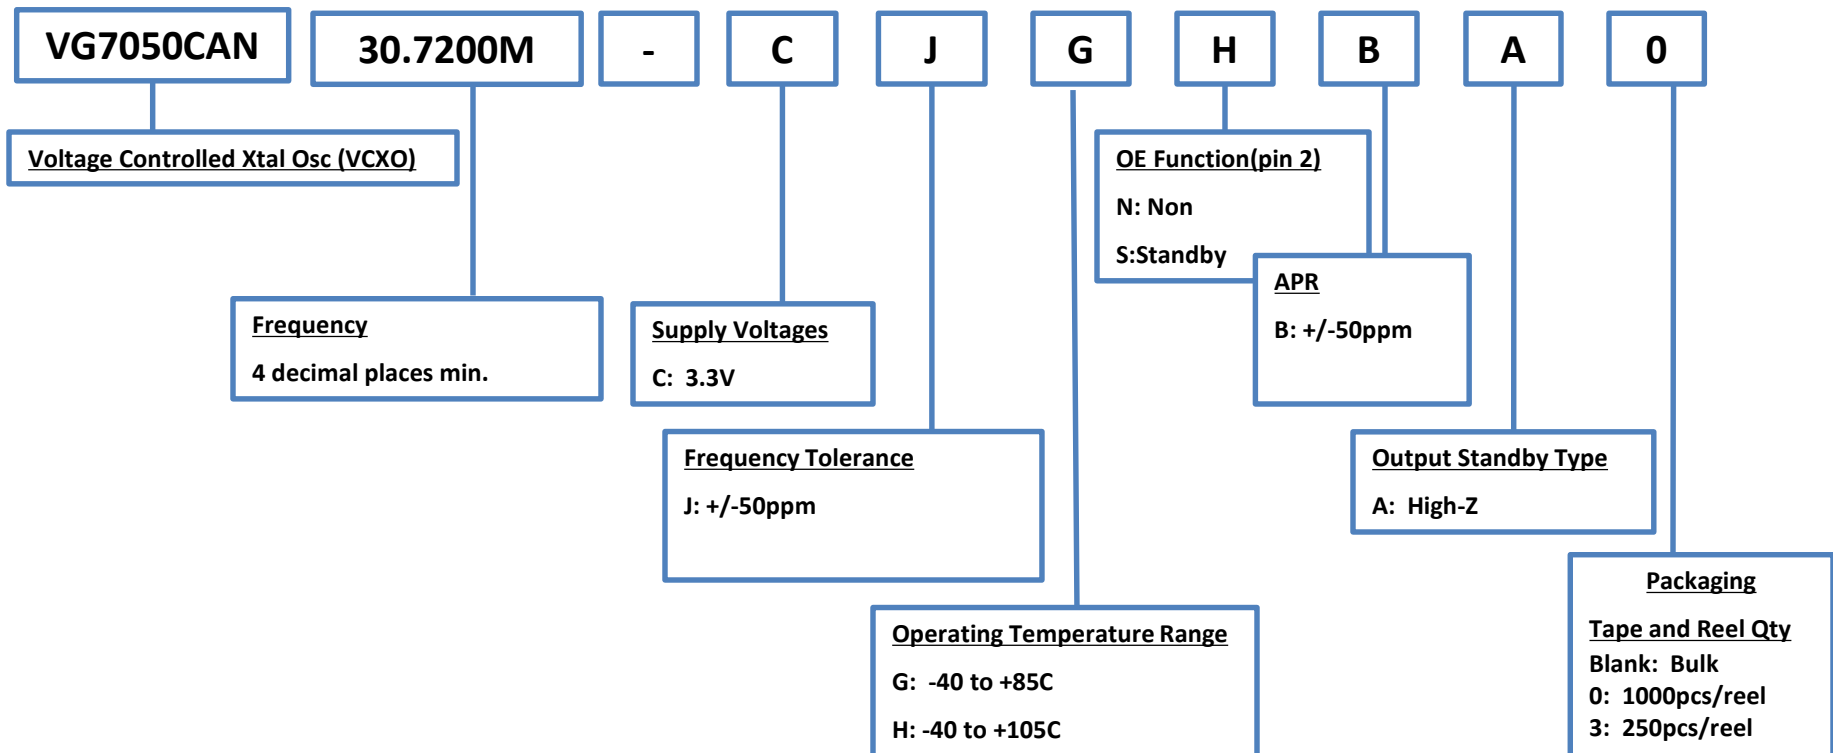


Product Configuration System



Oscillators - VCXO


Discontinued

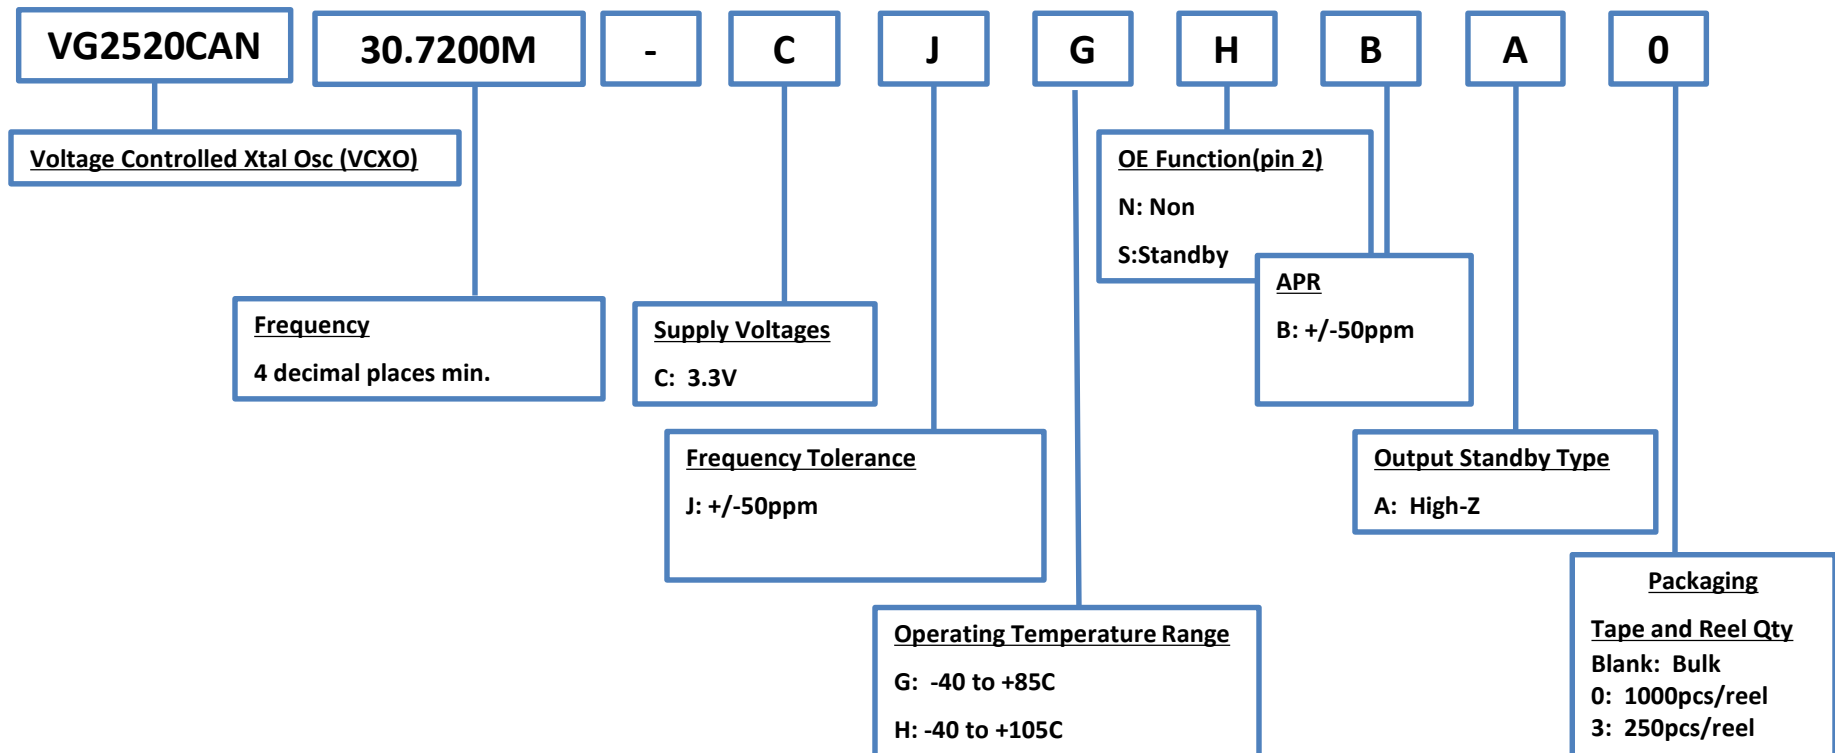

Product Configuration System



Programmable Voltage Controlled Oscillator (VCXO)

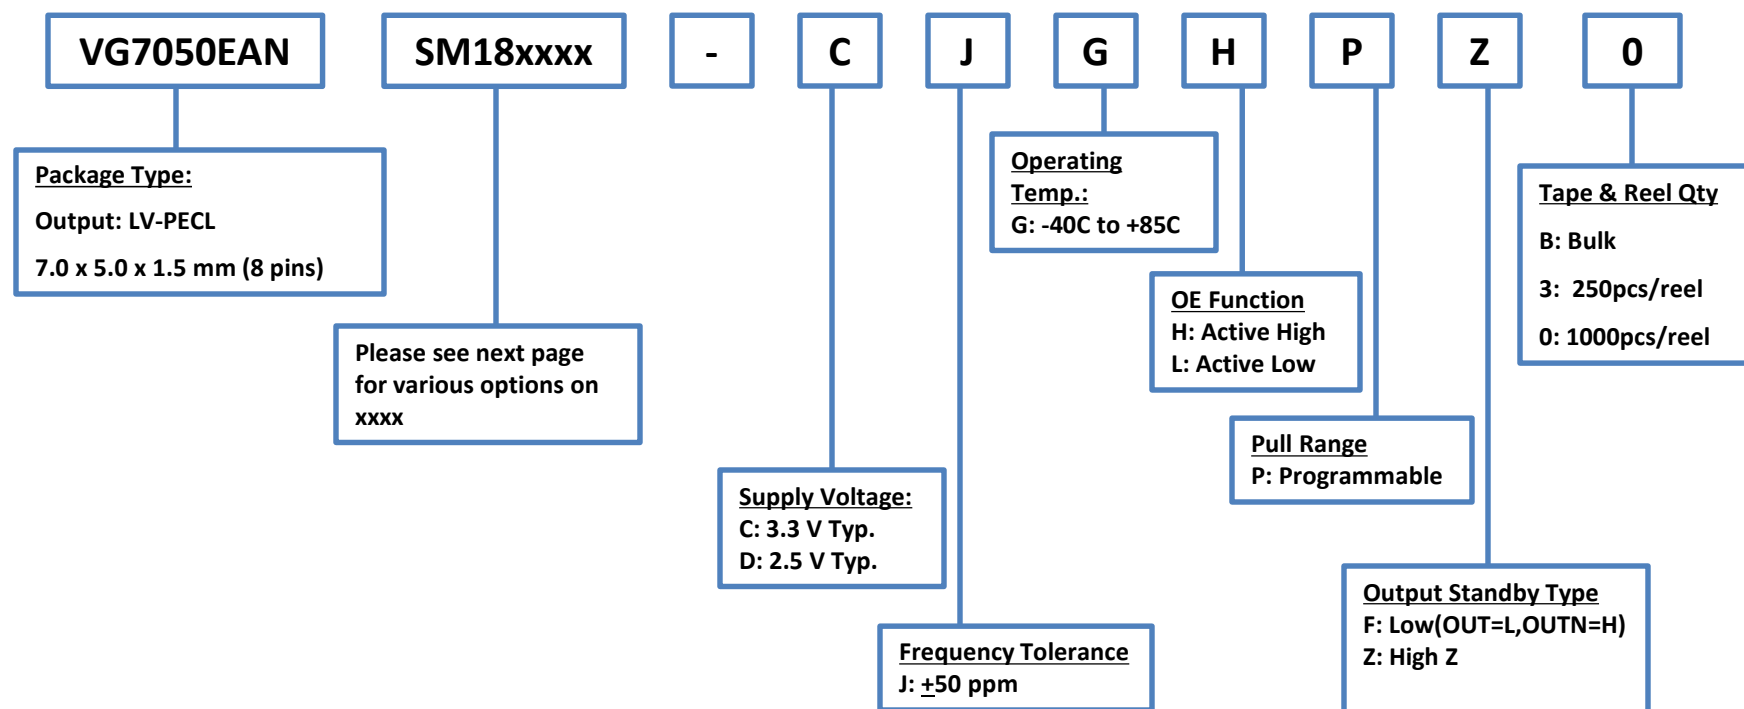

NOTE:

Frequency Range: 50~800MHz

Please contact us for requirements not listed in this specification.

EPSON

June, 2021

Product Configuration System



Programmable Voltage Controlled Oscillator (VCXO)

VG7050EAN

Part Number	Start-up frequency [MHz]	APR			Supply Voltage	OE function	Output Standby Type
		Max	Initial	Vc range			
VG7050EAN-SM18T001-CJGHPZ	622.080000	180	100	1.65+/-1.25	3.3V	Active high	Hi-Z
VG7050EAN-SM18T002-DJGHPZ				1.25+/-1.00	2.5V		
VG7050EAN-SM18T003-CJGLPZ				1.65+/-1.35	3.3V	Active low	
VG7050EAN-SM18T004-DJGLPZ				1.25+/-1.00	2.5V		
VG7050EAN-SM18T005-CJGHPF				1.65+/-1.35	3.3V	Active high	Low (OUT=L,OUTN=H)
VG7050EAN-SM18T006-DJGHPF				1.25+/-1.00	2.5V		
VG7050EAN-SM18T007-CJGLPF				1.65+/-1.35	3.3V	Active low	
VG7050EAN-SM18T008-DJGLPF				1.25+/-1.00	2.5V		
VG7050EAN-SM18T009-CJGHPZ	156.250000	180	100	1.65+/-1.25	3.3V	Active high	Hi-Z
VG7050EAN-SM18T010-DJGHPZ				1.25+/-1.00	2.5V		


-If customer wants startup frequency other than 622.08MHz or 156.25MHz, please contact us for a custom part.

-Customer can always change the output frequency with the I2C (from 50MHz to 800MHz)

Product Configuration System



Programmable Voltage Controlled Oscillator (VCXO)

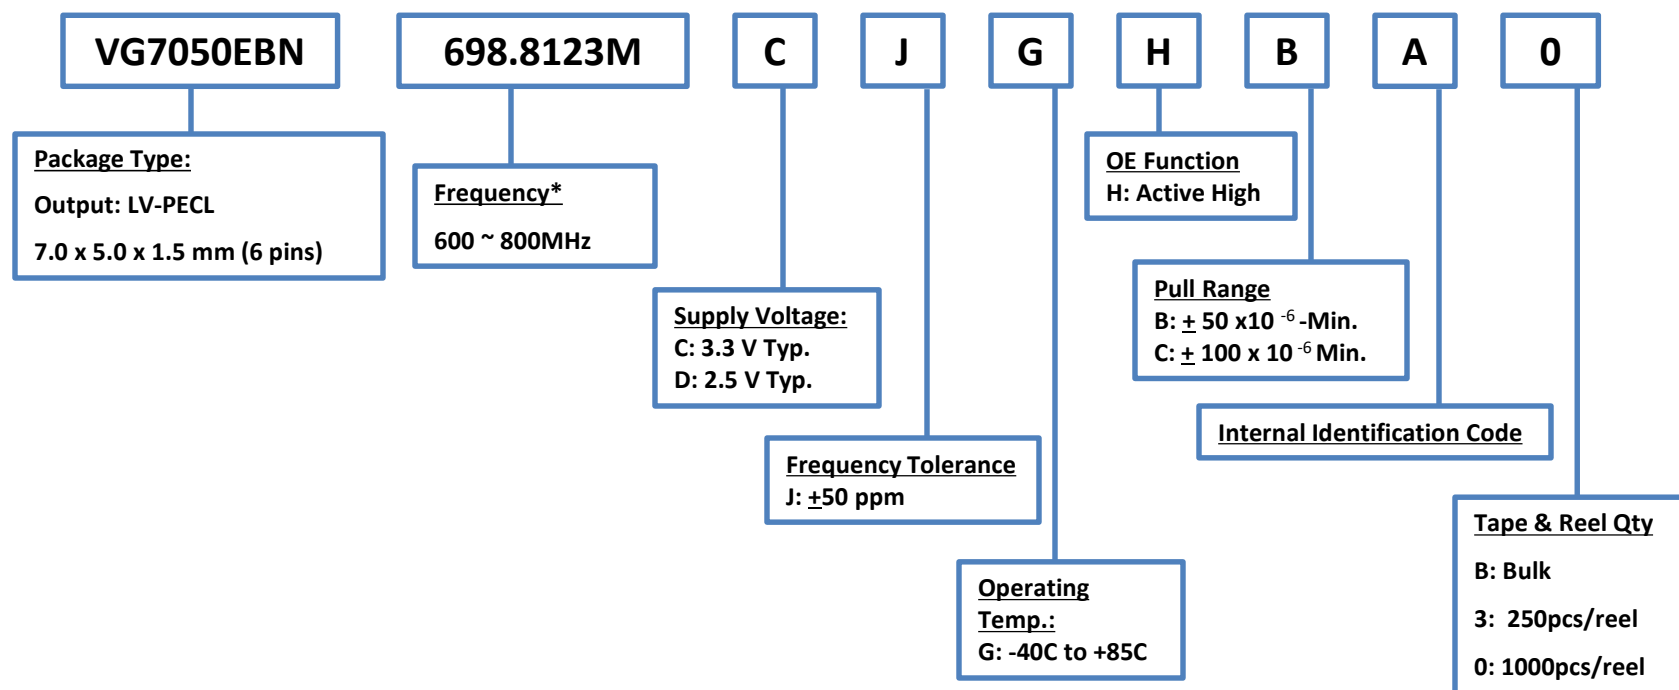

EPSON

June, 2021

NOTE:


Standard Frequencies: 698.8123MHz, 753.6211MHz, 794.7278MHz

Please contact us for requirements not listed in this specification.

Product Configuration System



Programmable Voltage Controlled Oscillator (VCXO)

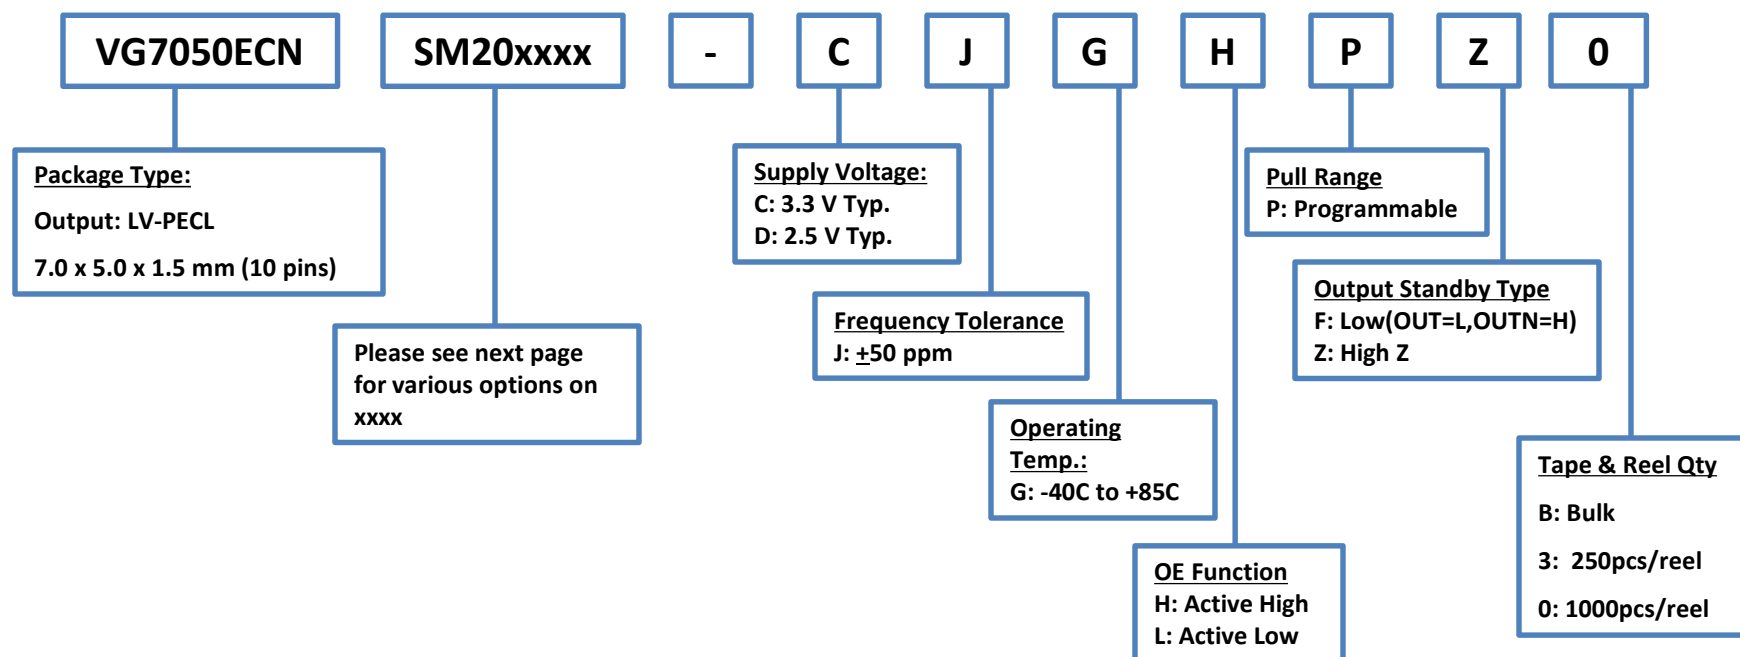

EPSON

June, 2021

NOTE:

Frequency Range: 50~800MHz

Please contact us for requirements not listed in this specification.

Product Configuration System



Programmable Voltage Controlled Oscillator (VCXO)

VG7050ECN

Part Number	Start-up frequency [MHz]				APR			Supply	OE	Output	
	frequency 1	frequency 2	frequency 3	frequency 4	Max	Initial	Vc range	Voltage	function	Standby	Type
VG7050ECN-SM20T001-CJGHPZ	622.080000	644.531250	669.326582	693.482991	180	100	1.65+/-1.25	3.3V	Active high	Hi-Z	
VG7050ECN-SM20T002-DJGHPZ							1.25+/-1.00	2.5V			
VG7050ECN-SM20T003-CJGLPZ							1.65+/-1.35	3.3V	Active low		
VG7050ECN-SM20T004-DJGLPZ							1.25+/-1.00	2.5V			
VG7050ECN-SM20T005-CJGHPPF							1.65+/-1.35	3.3V	Active high	Low (OUT=L,OUTN=H)	
VG7050ECN-SM20T006-DJGHPPF							1.25+/-1.00	2.5V			
VG7050ECN-SM20T007-CJGLPF							1.65+/-1.35	3.3V	Active low		
VG7050ECN-SM20T008-DJGLPF							1.25+/-1.00	2.5V			

-If customer wants different startup frequencies, please contact us for a custom part.

-Customer can always change the output frequencies with the I2C (from 50MHz to 800MHz)

Product Configuration Guide


SENSING DEVICES



Product Configuration System




Gyro Sensor – Digital Output

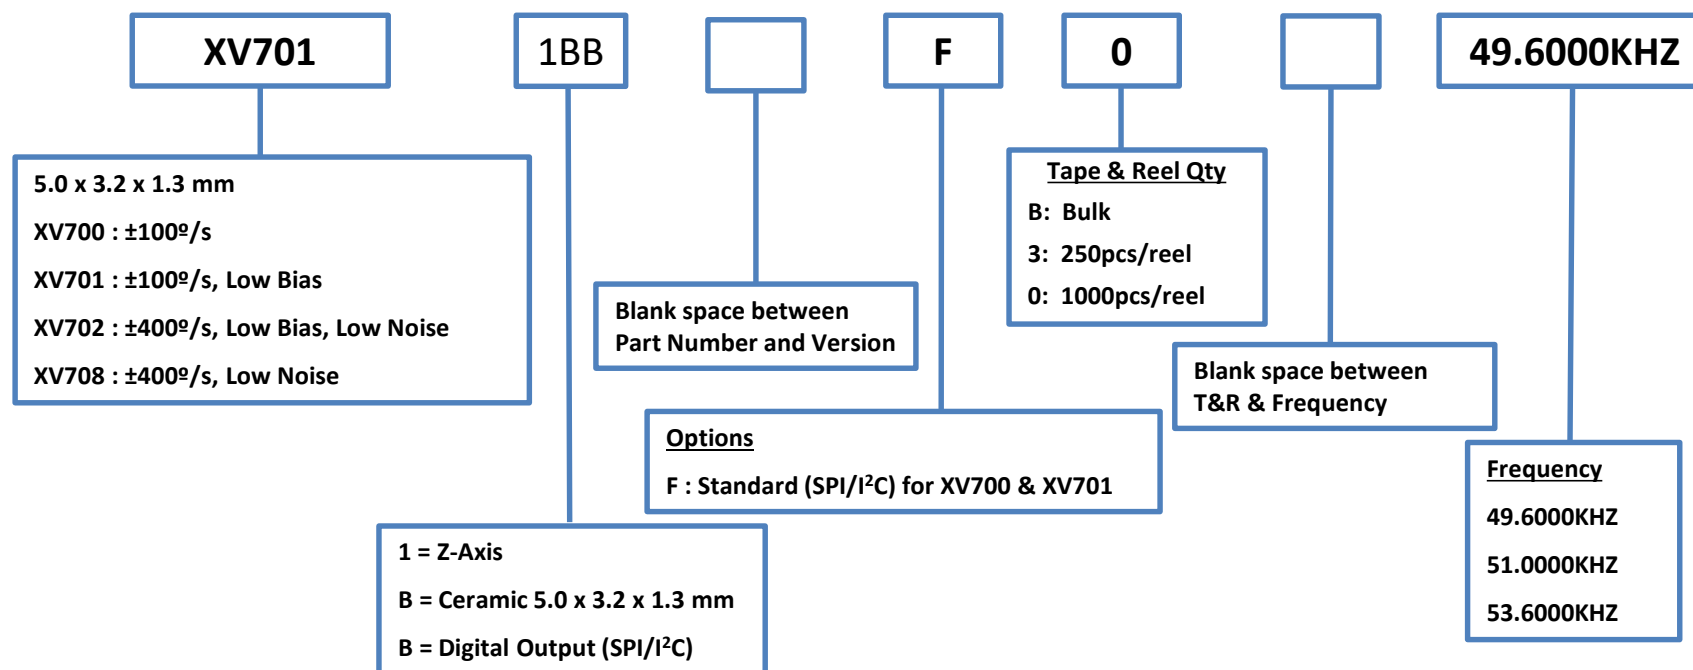

Product Configuration System



Gyro Sensor – Analog Output

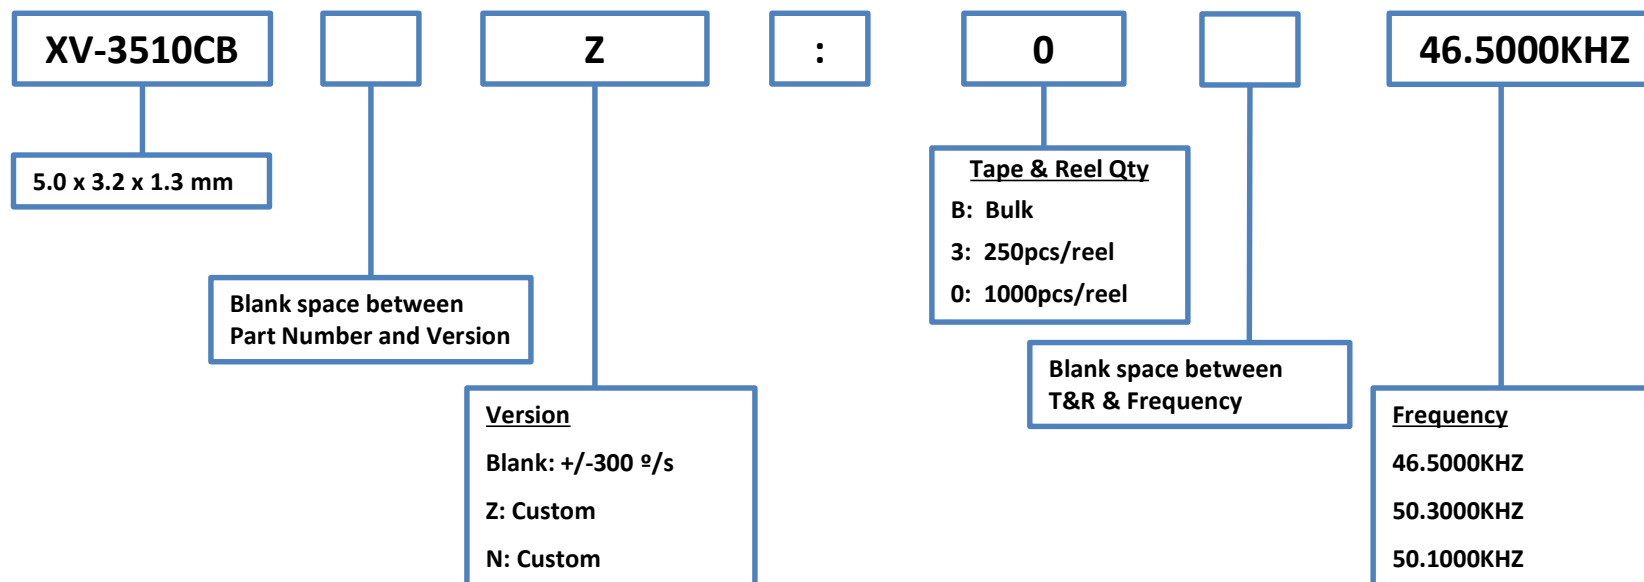


Product Configuration System



Gyro Sensor – Analog Output

Discontinued

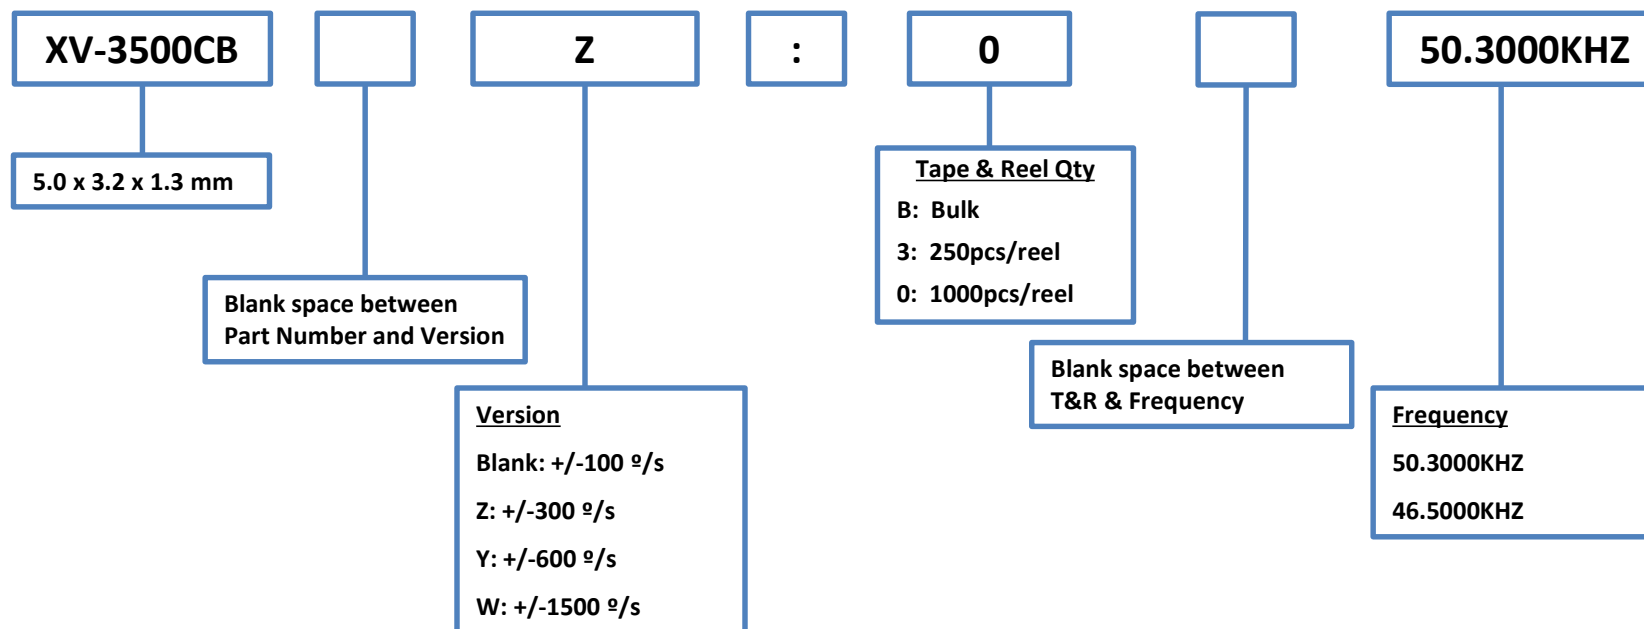


Product Configuration System





Gyro Sensor – Analog Output

Discontinued

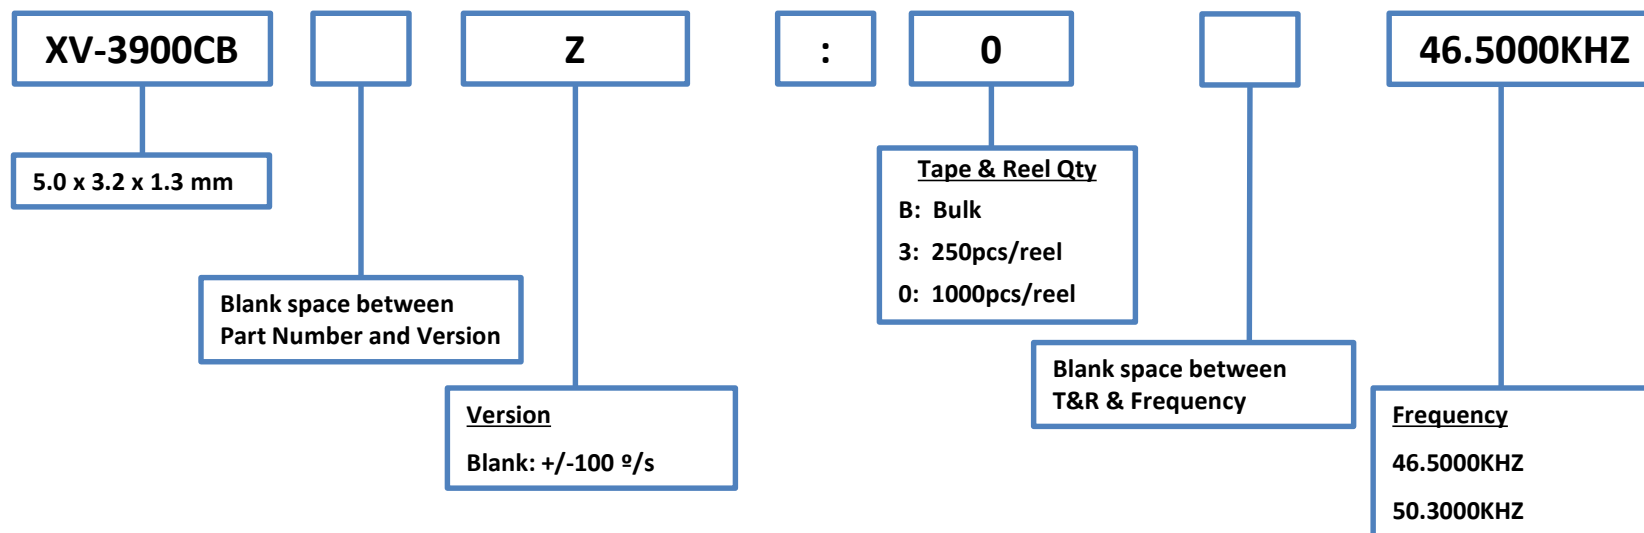

Product Configuration Guide

REAL TIME CLOCKS




EPSON

June, 2021

Product Configuration System



Real Time Clock Modules – I²C-Bus

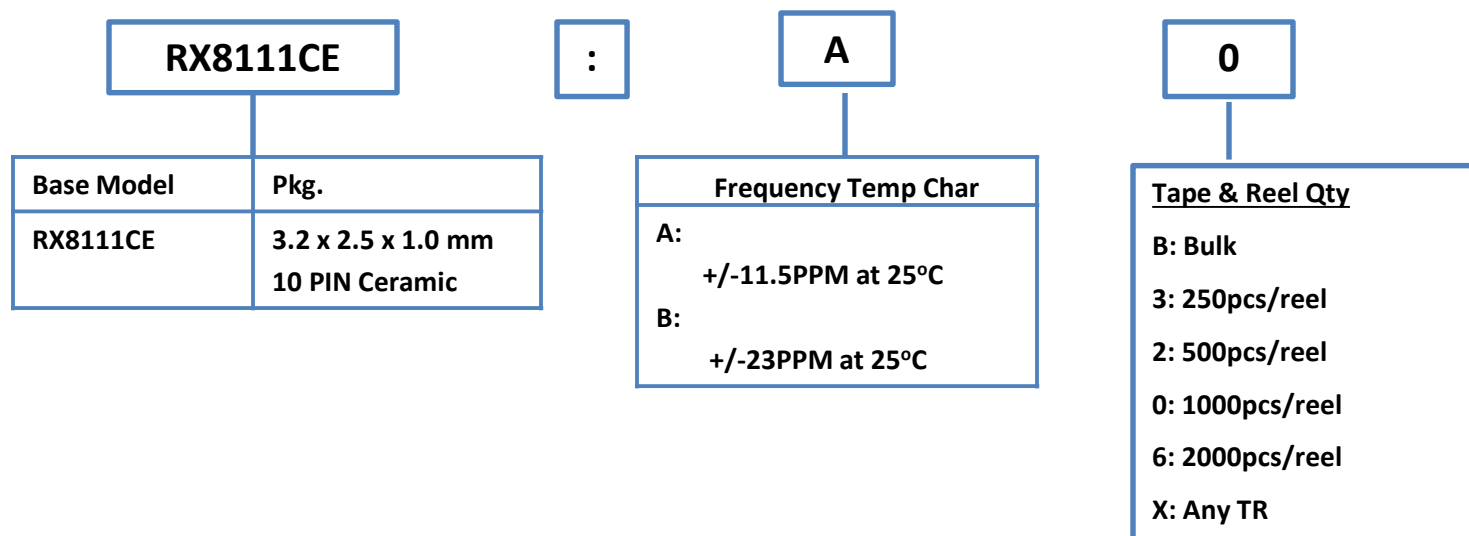

EPSON

June, 2021


NOTE:

Please contact us for requirements not listed in this specification.

Product Configuration System



Real Time Clock Modules – SPI

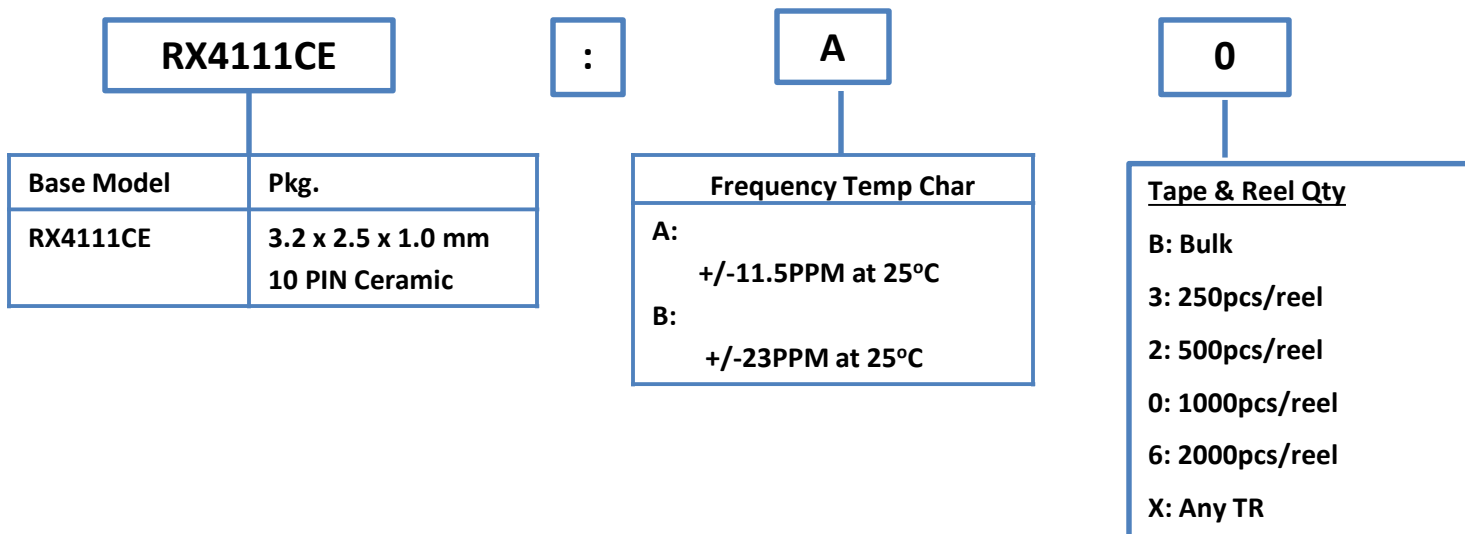

EPSON

June, 2021

NOTE:

Please contact us for requirements not listed in this specification.

Product Configuration System



Real Time Clock Modules – I²C-Bus

RX8804CE		:	XA	0
Base Model	Pkg.			
RX8804CE RA8804CE* *Automotive	3.2 x 2.5 x 1.0 mm 10 PIN Ceramic			
		Frequency Temp Char		
		XA: +/-1.9PPM 0°C to 50°C +/-3.4PPM -40°C to 85°C +/-8.0ppm 85°C to 105°C		
		XB: +/-1.9PPM 0°C to 50°C +/-5.0PPM -40°C to 85°C +/-8.0ppm 85°C to 105°C		
		Tape & Reel Qty		
		B: Bulk		
		3: 250pcs/reel		
		2: 500pcs/reel		
		0: 1000pcs/reel		
		6: 2000pcs/reel		
		X: Any TR		

EPSON

June, 2021

NOTE:

Please contact us for requirements not listed in this specification.

Product Configuration System



Real Time Clock Modules – Serial (3 Wire & 4 Wire)

RA-4565SA

:

B

0

:

PURE SN

Base Model	Pkg.	Status
RA-4565SA	SOP 14 PIN	Active
RA-4574SA	SOP 14 PIN	Active
RTC-4543SA	SOP 14 PIN	Active
RTC-4543SB	SOP 18 PIN	Discontinued
RTC-4574JE	VSOJ 20 PIN	Discontinued
RTC-4574SA	SOP 14 PIN	Active
RTC-4701JE	VSOJ 20 PIN	Discontinued
RTC-4701NB	SON 22 PIN	Discontinued
RTC-9701JE	VSOJ 20 PIN	Discontinued
RX-4581NB	SON 22 PIN	Discontinued

Frequency Tolerance:	
RA-4565SA	B=5+/-23PPM
RA-4574SA	B=5+/-23PPM
RTC-4543SA	A=5+/-12PPM B=5+/-23PPM
RTC-4543SB	A=5+/-12PPM B=5+/-23PPM
RTC-4574JE	B=5+/-23PPM
RTC-4574SA	B=5+/-23PPM
RTC-4701JE	B=5+/-23PPM
RTC-4701NB	B=5+/-23PPM
RTC-9701JE	B=5+/-23PPM
RX-4581NB	B=5+/-23PPM

Tape & Reel Qty
SOP Package Type Only
 Blank: Bulk
 0: 1000 pcs. per reel
 3: 250 pcs. per reel
DIP Package Type Only
 S: 25pcs/Stick

PURE SN
ROHS

Note:

SA packages in "PURE SN" is **DISCONTINUED** but "RoHS " is ACTIVE.
 Model P/N in RED font = **DISCONTINUED**

EPSON


June, 2021

168

Product Configuration System



Real Time Clock Modules – Serial (3 Wire & 4 Wire)

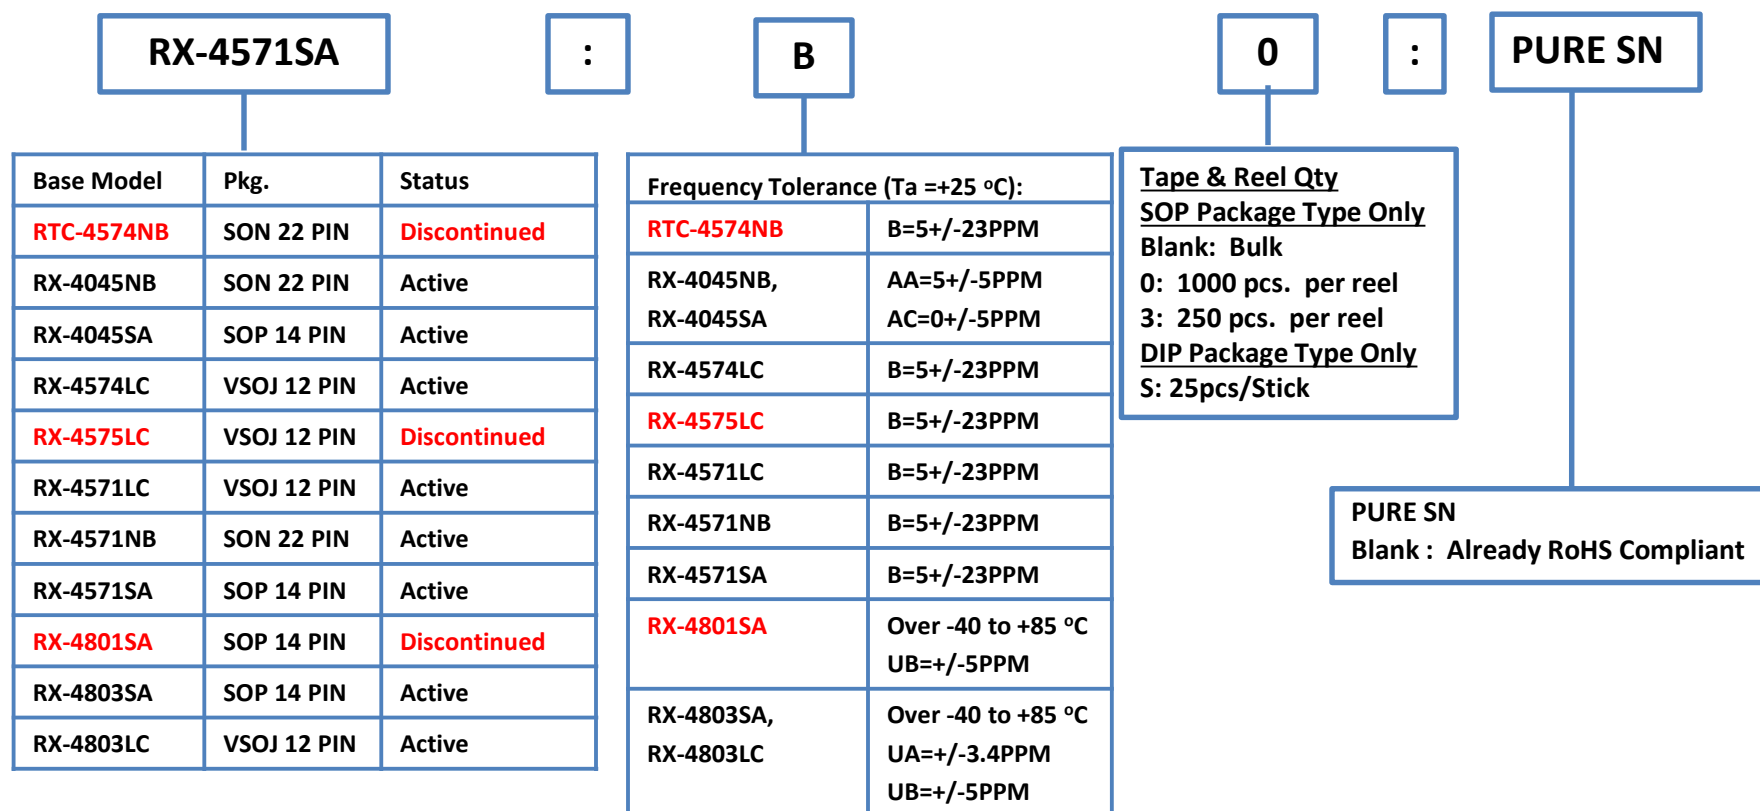

Note:

All LC packages are already RoHS Compliant with "PURE SN".

LC packages with "PURE SN" are **DISCONTINUED**

*RX-4575LC - Sn-Ag Plating NOT PURE SN

Model P/N in **RED** font = **DISCONTINUED**

EPSON


June, 2021

169

Product Configuration System



Real Time Clock Modules – I²C-Bus

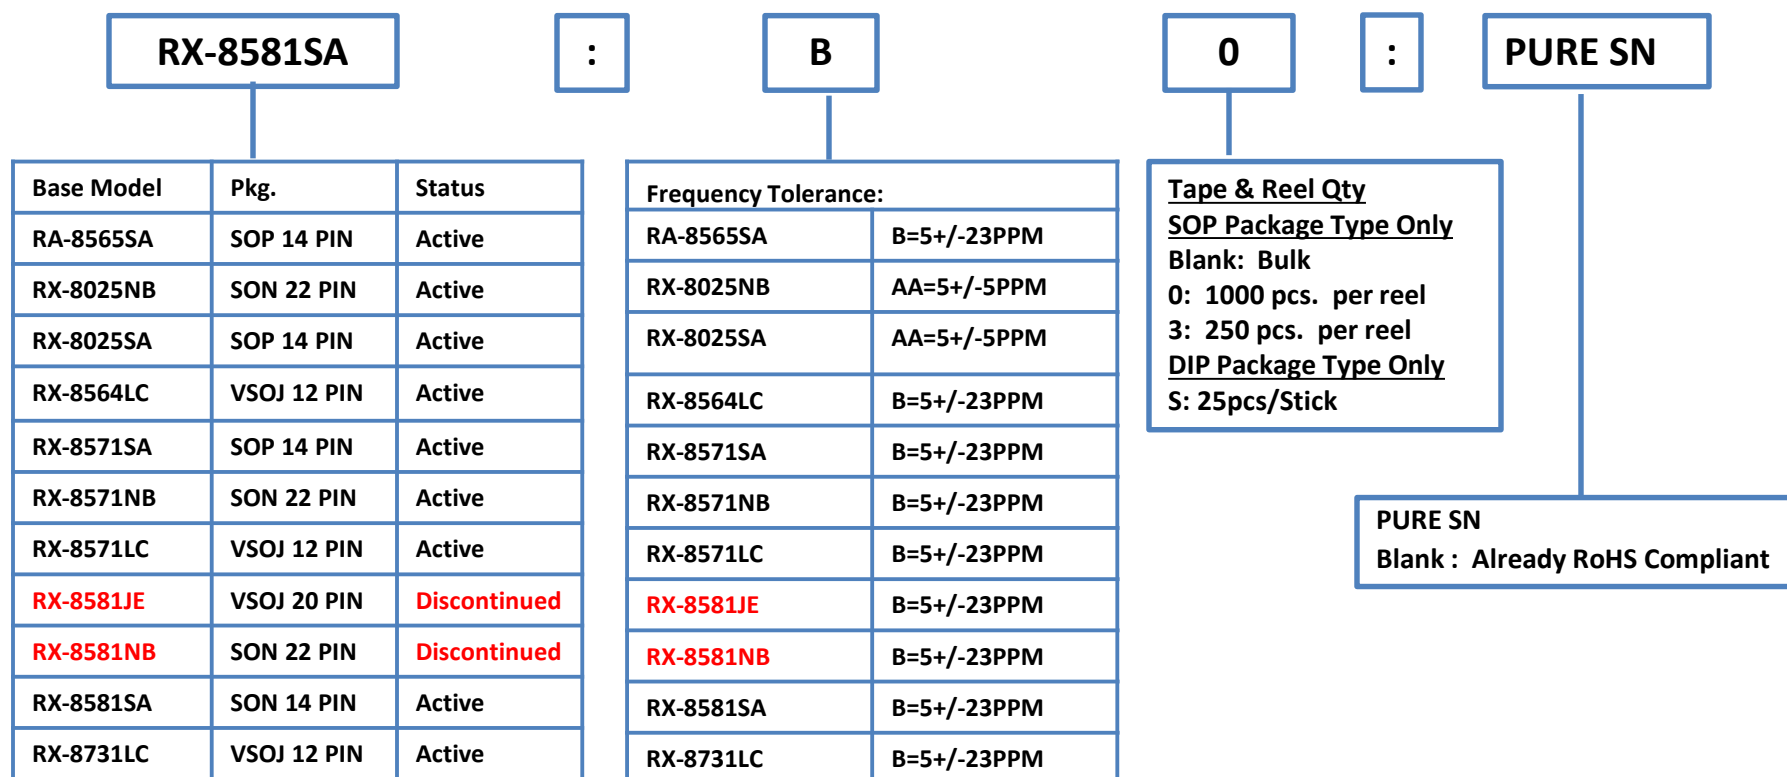

Note:

All LC packages are already RoHS Compliant with "PURE SN"
Model P/N in RED font = DISCONTINUED

EPSON

June, 2021

170

Product Configuration System



Real Time Clock Modules – I²C-Bus

RA-8581SA

:

B

0

:

PURE SN

Base Model	Pkg.	Status
RA-8581SA	SOP 14 PIN	Discontinued
RTC-8564JE	VSOJ 20 PIN	Active
RTC-8564NB	SON 22 PIN	Active
RX8010SJ	SOP 8 PIN	Active
RA4803SA RA8803SA	SOP 14 PIN SOP 14 PIN	Active
RX8900SA RA8900SA	SOP 14 PIN	Active
RX8900CE RA8900CE	3.2x2.5mm 10 PIN Ceramic	Active

Frequency Tolerance:

RA-8581SA B=5+/-23PPM

RTC-8564JE B=5+/-23PPM

RTC-8564NB B=5+/-23PPM

RX8010SA B=5+/-23PPM

RX4803SA
and
RX8803SA
UA= +/-3.4PPM
-40°C to 85°C
UB= +/-5.0PPM
-40°C to 85°C
UC=+/- 5PPM
-30°C to 70°C
AA=5+/-5PPM
25°C

RX8900SA
RA8900SA
and
RX8900CE
RX8900CE
UA=+/-3.4PPM
-40°C to 85°C
UB=+/-5PPM
-40°C to 85°C
UC=+/-5PPM
-30°C to 70°C

Tape & Reel Qty SOP Package Type Only

B: Bulk

0: 1000 pcs. per reel

3: 250 pcs. per reel

Blank : CE Package

RX8010SJ: PURE SN

RA4803SA: PURE SN

RX8803SA: PURE SN

RX8900SA: PURE SN

RA-8581SA: ROHS or PURE SN

RTC-8564JE: ROHS

RTC-8564NB: ROHS or PURE SN

Note:

Model P/N in RED font = DISCONTINUED

EPSON

June, 2021


171

Product Configuration System



Real Time Clocks – Parallel 4-bit

Discontinued

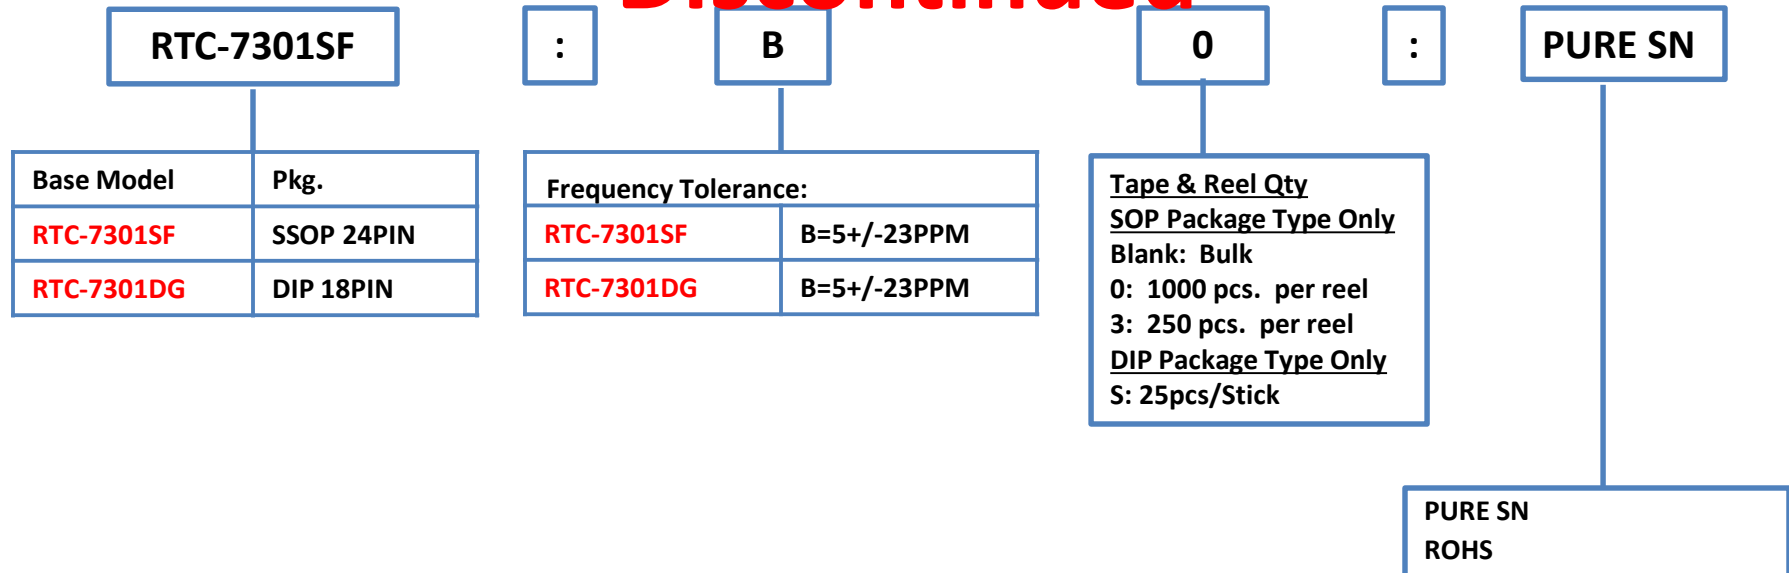

EPSON

June, 2021

Note:
Model P/N in RED font = DISCONTINUED

Product Configuration System



Real Time Clocks – Parallel 4-bit

Discontinued

RTC-72423A

Base Model	Pkg.	Freq. Tolerance
RTC-62421A	DIP 18PIN	+/-10ppm
RTC-62421B	DIP 18PIN	+/-50ppm
RTC-72421A	DIP 18PIN	+/-10ppm
RTC-72421B	DIP 18PIN	+/-50ppm
RTC-72423A	SSOP 24PIN	+/-20ppm
RTC-72423B	SSOP 24PIN	+/-50ppm

0

:

PURE SN

Tape & Reel Qty
SOP Package Type Only
Blank: Bulk
0: 1000 pcs. per reel
3: 250 pcs. per reel
DIP Package Type Only
S: 25pcs/Stick

PURE SN
ROHS

EPSON

June, 2021


Note:

Model P/N in RED font = DISCONTINUED

Product Configuration System



Real Time Clock Modules – I²C-Bus and SPI

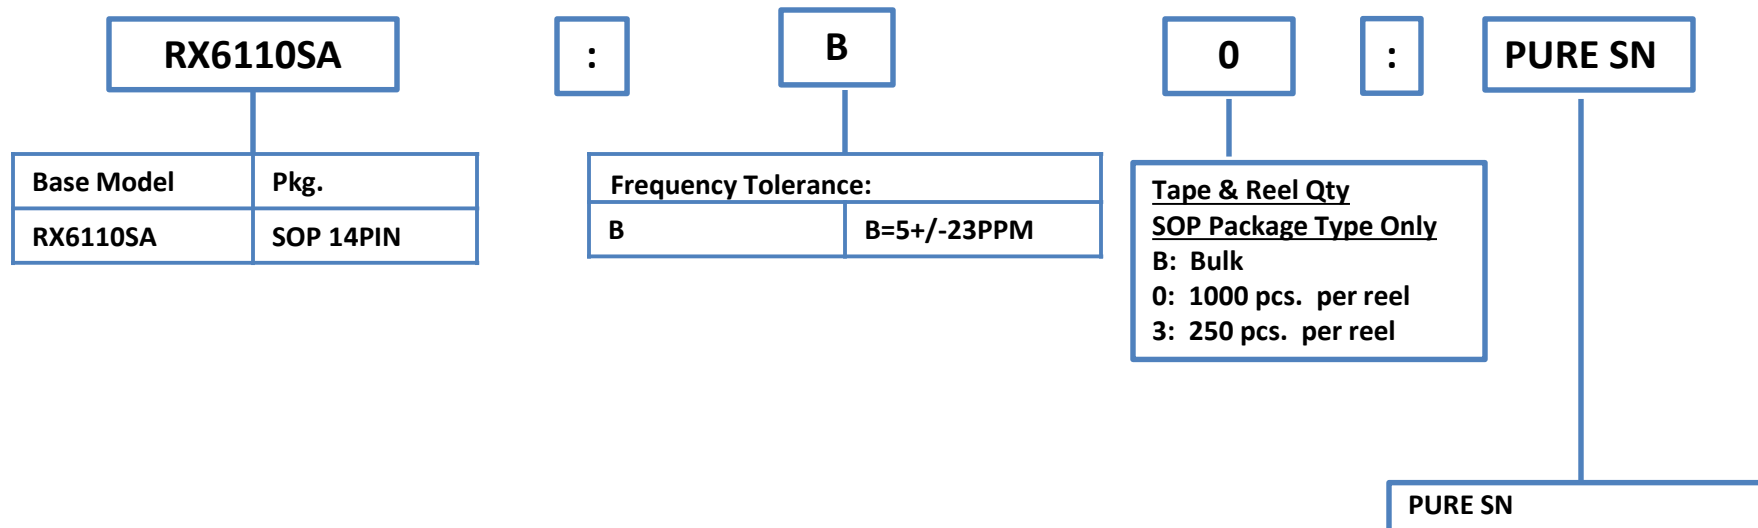

Product Configuration Guide

Appendix

Product Configuration System

Crystal Units Load Cap Codes and Values

Load Cap Code	Load Cap Value
AZ	3.5
VJ	4.0
EE	4.4
AT	4.8
X	5.0
JJ	5.4
E	6.0
FF	6.4
DD	6.5
VC	6.7
AG	7.0
AR	7.1
JK	7.4
VB	7.6
AN	7.8
AJ	8.0
AS	8.5
CC	8.7
GG	8.8
AC	9.0
AM	9.2

Load Cap Code	Load Cap Value
AL	9.5
S	9.6
VF	9.8
K	10.0
HH	10.4
AK	10.5
AP	10.7
P	11.0
AY	11.2
AW	11.5
W	12.0
A	12.5
T	13.0
N	13.5
Y	14.0
VH	14.5
R	15.0
B	16.0
AV	17.0
C	18.0
L	18.3

Load Cap Code	Load Cap Value
J	18.5
AQ	19.0
G	20.0
AF	21.5
D	22.0
AU	22.5
AE	22.9
AH	23.0
V	24.0
AI	25.0
Z	26.0
AA	27.0
Q	28.0
AB	30.0
H	32.0
I	33.0
U	47.0
AD	50.0
M	100.0
F	Series