


**Vishay Telefunken** 

## **Very Fast Soft Recovery Rectifier**

#### **Features**

- Miniature axial leaded
- Glass passivated
- Hermetically sealed glass envelope
- Low reverse current
- High reverse voltage



#### Applications

TV and monitor SMPS Electronic ballast

### **Absolute Maximum Ratings**

T<sub>i</sub> = 25°C

Parameter	Test Conditions	Туре	Symbol	Value	Unit
Reverse voltage		BYT43A	V <sub>R</sub>	50	V
=Repetitive peak reverse voltage		BYT43B	=V <sub>RRM</sub>	100	V
		BYT43D		200	V
		BYT43G		400	V
		BYT43J		600	V
		BYT43K		800	V
		BYT43M		1000	V
Peak forward surge current	t <sub>p</sub> =8.3 ms, half sinewave		I <sub>FSM</sub>	30	Α
Average forward current	Lead length I = 10 mm, $T_L = 25^{\circ}C$		I <sub>FAV</sub>	1	A
Junction and storage temperature range			T <sub>j</sub> =T <sub>stg</sub>	-55+175	°C

### **Maximum Thermal Resistance**

T<sub>i</sub> = 25°C

Parameter	Test Conditions	Symbol	Value	Unit
Junction ambient	Lead length I = 10 mm, $T_L$ = constant	R <sub>thJA</sub>	60	K/W
	on PC board with spacing 25mm	R <sub>thJA</sub>	110	K/W

## BYT43

#### Vishay Telefunken



#### **Electrical Characteristics**

#### $T_j = 25^{\circ}C$

Parameter	Test Conditions	Туре	Symbol	Min	Тур	Max	Unit
Forward voltage	I <sub>F</sub> = 1 A	BYT43A –BYT43J	V <sub>F</sub>			1.6	V
		BYT43K –BYT43M	V <sub>F</sub>			2	V
Reverse current	V <sub>R</sub> =V <sub>RRM</sub>		I <sub>R</sub>			5	μA
	V <sub>R</sub> =V <sub>RRM</sub> , T <sub>j</sub> =150°C		I <sub>R</sub>			150	μA
Reverse breakdown voltage	I <sub>R</sub> =100μA	BYT43A	V <sub>(BR)R</sub>	50			V
		BYT43B	V <sub>(BR)R</sub>	100			V
		BYT43D	V <sub>(BR)R</sub>	200			V
		BYT43G	V <sub>(BR)R</sub>	400			V
		BYT43J	V <sub>(BR)R</sub>	600			V
		BYT43K	V <sub>(BR)R</sub>	800			V
		BYT43M	V <sub>(BR)R</sub>	1000			V
Reverse recovery time	I <sub>F</sub> =0.5A, I <sub>R</sub> =1A,	BYT43A	t <sub>rr</sub>			50	ns
	i <sub>R</sub> =0.25A	–BYT43J					
		BYT43K –BYT43M	t <sub>rr</sub>			75	ns

## **Characteristics** ( $T_j = 25^{\circ}C$ unless otherwise specified)




Figure 1. Max. Thermal Resistance vs. Lead Length




Figure 2. Max. Average Forward Current vs. Ambient Temperature

BYT43 Vishay Telefunken







Figure 3. Max. Average Forward Current vs. Ambient Temperature












#### **Dimensions in mm**

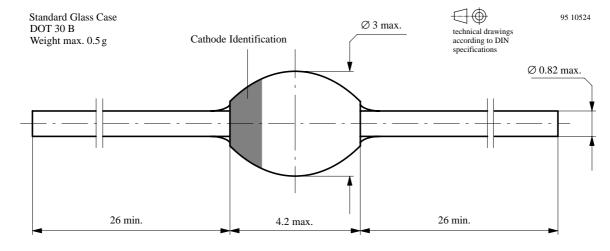

Document Number 86026 Rev. 3, 24-Jun-98 www.vishay.de • FaxBack +1-408-970-5600 3 (4)

# BYT43

#### Vishay Telefunken



#### **Ozone Depleting Substances Policy Statement**

It is the policy of Vishay Semiconductor GmbH to

1. Meet all present and future national and international statutory requirements.

2. Regularly and continuously improve the performance of our products, processes, distribution and operating systems

with respect to their impact on the health and safety of our employees and the public, as well as their impact on the environment.

It is particular concern to control or eliminate releases of those substances into the atmosphere which are known as ozone depleting substances (ODSs).

The Montreal Protocol (1987) and its London Amendments (1990) intend to severely restrict the use of ODSs and forbid their use within the next ten years. Various national and international initiatives are pressing for an earlier ban on these substances.

Vishay Semiconductor GmbH has been able to use its policy of continuous improvements to eliminate the use of ODSs listed in the following documents.

- 1. Annex A, B and list of transitional substances of the Montreal Protocol and the London Amendments respectively
- 2. Class I and II ozone depleting substances in the Clean Air Act Amendments of 1990 by the Environmental Protection Agency (EPA) in the USA
- 3. Council Decision 88/540/EEC and 91/690/EEC Annex A, B and C (transitional substances) respectively.

Vishay Semiconductor GmbH can certify that our semiconductors are not manufactured with ozone depleting substances and do not contain such substances.

We reserve the right to make changes to improve technical design and may do so without further notice. Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer. Should the buyer use Vishay-Telefunken products for any unintended or unauthorized application, the buyer shall indemnify Vishay-Telefunken against all claims, costs, damages, and expenses, arising out of, directly or indirectly, any claim of personal damage, injury or death associated with such unintended or unauthorized use.

> Vishay Semiconductor GmbH, P.O.B. 3535, D-74025 Heilbronn, Germany Telephone: 49 (0)7131 67 2831, Fax number: 49 (0)7131 67 2423