**Product data sheet** 

## 1. General description

High-speed switching diode, encapsulated in a small SOT23 (TO-236AB) Surface-Mounted Device (SMD) plastic package.

### 2. Features and benefits

High switching speed: t<sub>rr</sub> ≤ 4 ns

Low capacitance: C<sub>d</sub> ≤ 1.5 pF

Low leakage current

Reverse voltage: V<sub>R</sub> ≤ 100 V

Small SMD plastic packages

# 3. Applications

· High-speed switching

· Reverse polarity protection

General-purpose switching

### 4. Quick reference data

### Table 1. Quick reference data

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
Per diode						
I <sub>R</sub>	reverse current	V <sub>R</sub> = 80 V; T <sub>amb</sub> = 25 °C	-	-	0.5	μΑ
V <sub>R</sub>	reverse voltage		-	-	100	V
t <sub>rr</sub>	reverse recovery time	$I_F = 10 \text{ mA}; I_R = 10 \text{ mA}; I_{R(meas)} = 1 \text{ mA};$ $R_L = 100 \Omega; T_{amb} = 25 \text{ °C}$	-	-	4	ns



**High-speed switching diode** 

# 5. Pinning information

#### **Table 2. Pinning information**

Pin	Symbol	Description	Simplified outline	Graphic symbol
1	A1	anode (diode 1)	]3	K1, A2
2	K2	cathode (diode 2)		
3	K1, A2	cathode (diode 1) and anode (diode 2)	SOT23	A1 K2 006aaa763

# 6. Ordering information

### **Table 3. Ordering information**

Type number	Package				
	Name	Description	Version		
BAV99		plastic, surface-mounted package; 3 terminals; 1.9 mm pitch; 2.9 mm x 1.3 mm x 1 mm body	SOT23		

# 7. Marking

### **Table 4. Marking codes**

Type number	Marking code[1]
BAV99	A7%

[1] % = placeholder for manufacturing site code

High-speed switching diode

# 8. Limiting values

#### Table 5. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions		Min	Max	Unit
Per diode						
V <sub>R</sub>	reverse voltage			-	100	V
$V_{RRM}$	repetitive peak reverse voltage			-	100	V
I <sub>F</sub>	forward current	single diode loaded		-	215	mA
		double diode loaded		-	125	mA
I <sub>FRM</sub>	repetitive peak forward current			-	500	mA
I <sub>FSM</sub>	non-repetitive peak	t <sub>p</sub> = 1 μs; square wave; T <sub>j(init)</sub> = 25 °C		-	4	Α
	forward current	t <sub>p</sub> = 1 ms; square wave; T <sub>j(init)</sub> = 25 °C		-	1	Α
		t <sub>p</sub> = 1 s; square wave; T <sub>j(init)</sub> = 25 °C		-	0.5	Α
Per device;	one diode loaded			'		
P <sub>tot</sub>	total power dissipation	T <sub>amb</sub> ≤ 25 °C	[1]	-	250	mW
Tj	junction temperature			-	150	°C
T <sub>amb</sub>	ambient temperature			-65	150	°C
T <sub>stg</sub>	storage temperature			-65	150	°C

<sup>[1]</sup> Device mounted on an FR4 Printed-Circuit Board (PCB), single-sided copper, tin-plated and standard footprint.

## 9. Thermal characteristics

**Table 6. Thermal characteristics** 

Symbol	Parameter	Conditions		Min	Тур	Max	Unit
$R_{th(j-a)}$	thermal resistance from junction to ambient	single diode loaded; in free air	[1]	-	-	500	K/W
$R_{th(j-sp)}$	thermal resistance from junction to solder point			-	-	360	K/W

<sup>[1]</sup> Device mounted on an FR4 PCB, single-sided copper, tin-plated and standard footprint.

### High-speed switching diode

## 10. Characteristics

**Table 7. Characteristics** 

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
Per diode						
V <sub>F</sub>	forward voltage	I <sub>F</sub> = 1 mA; T <sub>amb</sub> = 25 °C	-	-	715	mV
		I <sub>F</sub> = 10 mA; T <sub>amb</sub> = 25 °C	-	-	855	mV
		I <sub>F</sub> = 50 mA; T <sub>amb</sub> = 25 °C	-	-	1	V
		I <sub>F</sub> = 150 mA; T <sub>amb</sub> = 25 °C	-	-	1.25	V
I <sub>R</sub>	reverse current	V <sub>R</sub> = 25 V; T <sub>amb</sub> = 25 °C	-	-	30	nA
		V <sub>R</sub> = 80 V; T <sub>amb</sub> = 25 °C	-	-	0.5	μΑ
		V <sub>R</sub> = 25 V; T <sub>j</sub> = 150 °C	-	-	30	μΑ
		V <sub>R</sub> = 80 V; T <sub>j</sub> = 150 °C	-	-	50	μΑ
C <sub>d</sub>	diode capacitance	V <sub>R</sub> = 0 V; f = 1 MHz; T <sub>amb</sub> = 25 °C	-	-	1.5	pF
t <sub>rr</sub>	reverse recovery time	$I_F$ = 10 mA; $I_R$ = 10 mA; $I_{R(meas)}$ = 1 mA; $I_{L}$ = 100 Ω; $I_{L}$ = 25 °C	-	-	4	ns
$V_{FRM}$	peak forward recovery voltage	$I_F = 10 \text{ mA}; t_r = 20 \text{ ns}; T_{amb} = 25 \text{ °C}$	-	-	1.75	V

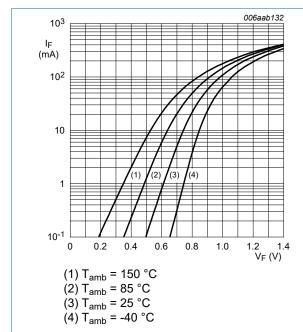


Fig. 1. Forward current as a function of forward voltage; typical values

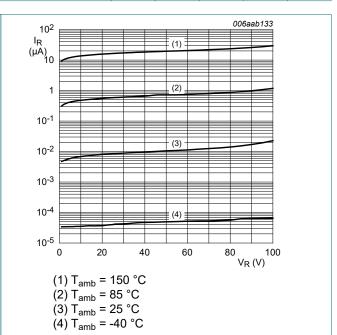


Fig. 2. Reverse current as a function of reverse voltage; typical values

### **High-speed switching diode**


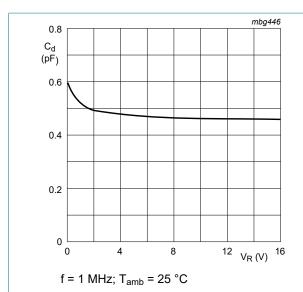


Fig. 3. Diode capacitance as a function of reverse voltage; typical values

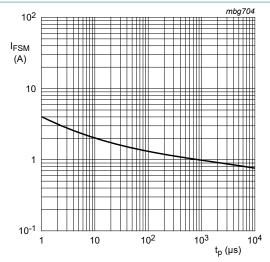


Based on square wave currents.

 $T_{j(init)} = 25 \, ^{\circ}C$ 


Fig. 4. Non-repetitive peak forward current as a function of pulse duration; typical values

### 11. Test information

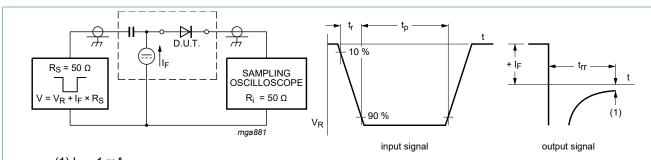

(1)  $I_R$  = 1 mA Input signal: reverse pulse rise time  $t_r$  = 0.6 ns; reverse voltage pulse duration  $t_p$  = 100 ns; duty cycle  $\delta$  = 0.05 Oscilloscope: rise time  $t_r$  = 0.35 ns

Fig. 5. Reverse recovery time test circuit and waveforms

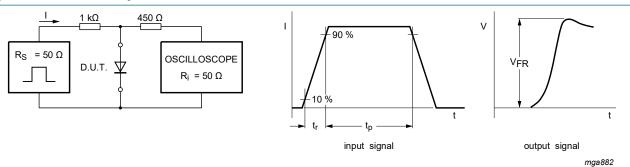


Input signal: forward pulse rise time  $t_r$  = 20 ns; forward current pulse duration  $t_p \ge 100$  ns; duty cycle  $\delta \le 0.005$ 

Fig. 6. Forward recovery voltage test circuit and waveforms

High-speed switching diode


# 12. Package outline

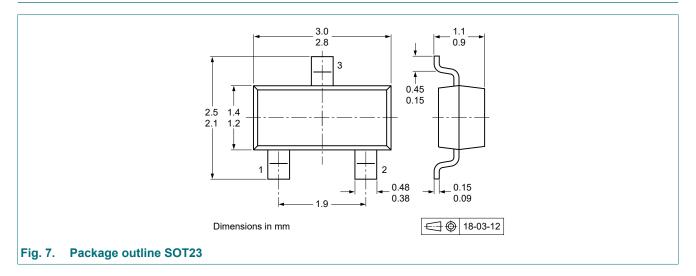

6 / 10

### High-speed switching diode

# 13. Soldering

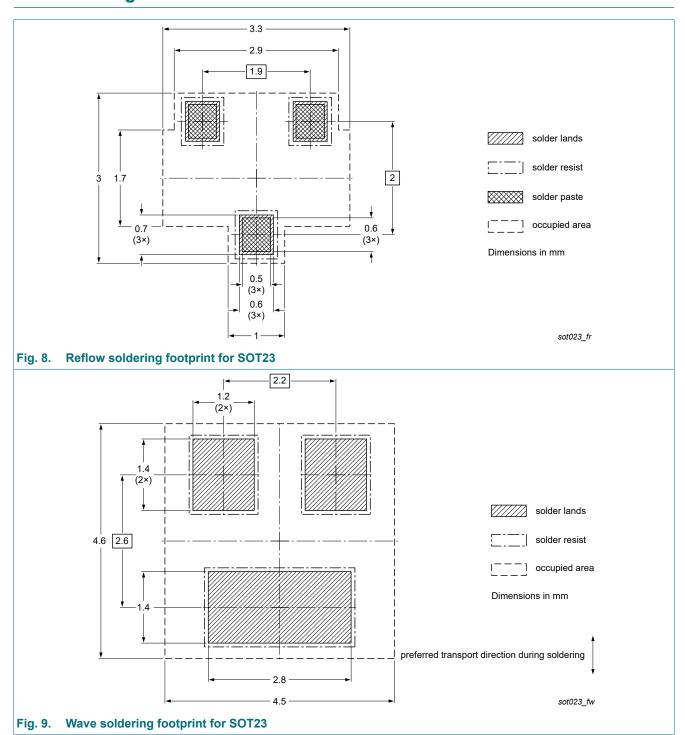

## **High-speed switching diode**

# 14. Revision history

### **Table 8. Revision history**

Data sheet ID	Release date	Data sheet status	Change notice	Supersedes
Data Sileet ID	Release date	Data Sileet Status	Change notice	Supersedes
BAV99 v.9	20220701	Product data sheet	-	BAV99_SER_8
Modification:	•	luct alternative(s).	sheet. cation. Please refer to ne	xperia.com for
BAV99_SER_8	20101118	Product data sheet	-	BAV99_SER_7
BAV99_SER_7	20100414	Product data sheet	-	BAV99_SER_6
BAV99_SER_6	20100310	Product data sheet	-	BAV99_SER_5
BAV99_SER_5	20080820	Product data sheet	-	BAV99_4 BAV99S_3 BAV99W_4
BAV99_4	20011015	Product specification	-	BAV99_3
BAV99S_3	20010514	Product specification	-	BAV99S_N_2
BAV99W_4	19990511	Product specification	-	BAV99W_3

8 / 10

### **High-speed switching diode**

### 15. Legal information

#### Data sheet status

Document status [1][2]	Product status [3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

- Please consult the most recently issued document before initiating or completing a design.
- [2] The term 'short data sheet' is explained in section "Definitions".
- The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the internet at <a href="https://www.nexperia.com">https://www.nexperia.com</a>.

#### **Definitions**

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

#### **Disclaimers**

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia.

In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of Nexperia.

Right to make changes — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — Nexperia products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Nexperia product can reasonably be expected to result in personal

injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Quick reference data** — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at <a href="http://www.nexperia.com/profile/terms">http://www.nexperia.com/profile/terms</a>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by sustained.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

Non-automotive qualified products — Unless this data sheet expressly states that this specific Nexperia product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. Nexperia accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without Nexperia's warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond Nexperia's specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies Nexperia for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond Nexperia's standard warranty and Nexperia's product specifications.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

#### **Trademarks**

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

BAV99

All information provided in this document is subject to legal disclaimers

© Nexperia B.V. 2022. All rights reserved

### High-speed switching diode

# **Contents**

1. General description	1
2. Features and benefits	1
3. Applications	1
4. Quick reference data	1
5. Pinning information	2
6. Ordering information	2
7. Marking	2
8. Limiting values	3
9. Thermal characteristics	3
10. Characteristics	4
11. Test information	5
12. Package outline	6
13. Soldering	7
14. Revision history	8
15. Legal information	9

For more information, please visit: http://www.nexperia.com For sales office addresses, please send an email to: salesaddresses@nexperia.com Date of release: 1 July 2022

10 / 10

<sup>©</sup> Nexperia B.V. 2022. All rights reserved

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Nexperia:

BAV99,235 BAV99,215