



HIGH VOLTAGE FAST RECOVER RECTIFIER

VOLTAGE RANGE 2500 to 5000 Volts CURRENT 0.2 Ampere

FEATURES


- * Low cost
- * Low leakage
- * Low forward voltage drop
- * High current capability

MECHANICALDATA

- * Case: Molded plastic
- * Epoxy: Device has UL flammability classification 94V-O
- * Lead: MIL-STD-202E method 208C guaranteed
- * Mounting position: Any
- * Weight: 0.35 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%.

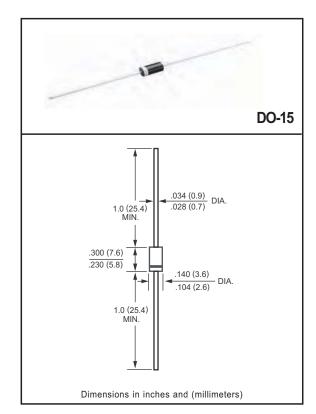

MAXIMUM RATINGS (At TA = 25°C unless otherwise noted)

RATINGS	SYMBOL	R2500F	R3000F	R4000F	R5000F	UNITS
Maximum Recurrent Peak Reverse Voltage	Vrrm	2500	3000	4000	5000	Volts
Maximum RMS Volts	Vrms	1750	2100	2800	3500	Volts
Maximum DC Blocking Voltage	VDC	2500	3000	4000	5000	Volts
Maximum Average Forward Rectified Current at TA = 50°C	lo		mAmps			
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	Ігѕм	30				Amps
Typical Current Square Time	l ² t		3.7			
Turical Thermal Desistance	Rθja		⁰C/W			
Typical Thermal Resistance	RθJL					
Typical Junction Capacitance (Note)	CJ	30				pF
Operating and Storage Temperature Range	TJ, TSTG	-55 to + 150			٥C	

ELECTRICAL CHARACTERISTICS (At TA = 25°C unless otherwise noted)


CHARACTERISTICS	SYMBOL	R2500F	R3000F	R4000F	R5000F	UNITS	
Maximum Instantaneous Forward Voltage at 0.	VF	4.0	5.0	5.0 6.5		Volts	
Maximum DC Reverse Current	@TA = 25°C						
at Rated DC Blocking Voltage @TA =100°C		IR	50				uAmps
Maximum Full Load Reverse Current Average .375", (9.5mm) lead length at TL = 75°C			3	0		uAmps	


NOTES: 1.Measured at 1 MHz and applied reverse voltage of 4.0 volts.


2. "Fully ROHS compliant", "100% Sn plating (Pb-free)".

3. Available in Halogen-free epoxy by adding suffix -HF after the part nbr.

RATING AND CHARACTERISTIC CURVES (R2500F THRU R5000F)








CRECTRON

Marking Description

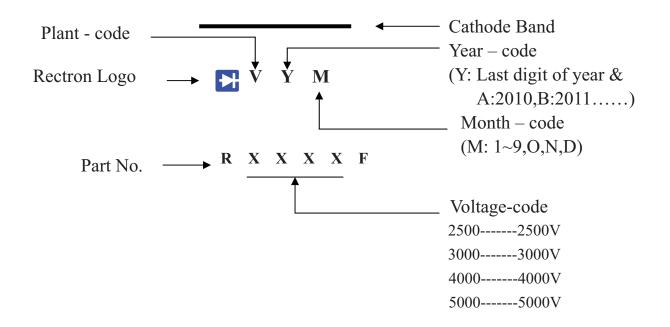

PACKAGING OF DIODE AND BRIDGE RECTIFIERS

BULK PACK

PACKA	GE	PACKING CODE	EA PER BOX	INNER BOX SIZE (mm)	CARTON SIZE (mm)	EA PER CARTON	GROSS WEIGHT(Kg)
DO-1	5	-B	500	194*84*21	415*220*255	25,000	12.74

REEL PACK

PACKAGE	PACKING CODE	EA PER REEL	EA PER INNER BOX	COMPONENT SPACE (mm)	TAPE SPACE (mm)	REEL DIA (mm)	CARTON SIZE (mm)	EA PER CARTON	GROSS WEIGHT(Kg)
DO-15	-T	4,000	4,000	5.0	52	330	355*350*335	16,000	10.05

AMMO PACK

PACKAGE	PACKING	REEL	COMPONENT	TAPE SPACE	BOX SIZE	CARTON	CARTON	GROSS
	CODE	(EA)	SPACE(mm)	(mm)	(mm)	SIZE(mm)	(EA)	WEIGHT (Kg)
DO-15	-F	1,500	5.0	52	255*73*100	400*268*225	15,000	8.8



DISCLAIMER NOTICE

Rectron Inc reserves the right to make changes without notice to any product specification herein, to make corrections, modifications, enhancements or other changes. Rectron Inc or anyone on its behalf assumes no responsibility or liability for any errors or inaccuracies. Data sheet specifications and its information contained are intended to provide a product description only. "Typical" parameters which may be included on RECTRON data sheets and/ or specifications can and do vary in different applications and actual performance may vary over time. Rectron Inc does not assume any liability arising out of the application or use of any product or circuit.

Rectron products are not designed, intended or authorized for use in medical, life-saving implant or other applications intended for life-sustaining or other related applications where a failure or malfunction of component or circuitry may directly or indirectly cause injury or threaten a life without expressed written approval of Rectron Inc. Customers using or selling Rectron components for use in such applications do so at their own risk and shall agree to fully indemnify Rectron Inc and its subsidiaries harmless against all claims, damages and expenditures.



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Rectron:

<u>R3000F-B</u> <u>R4000F-B</u> <u>R5000F-B</u> <u>R2500F-B</u> <u>R2500F-T</u> <u>R3000F-T</u> <u>R5000F-T</u> <u>R4000F-T</u> <u>R5000F</u> <u>R2500F</u> R3000F